GIH Flood Light Specifications



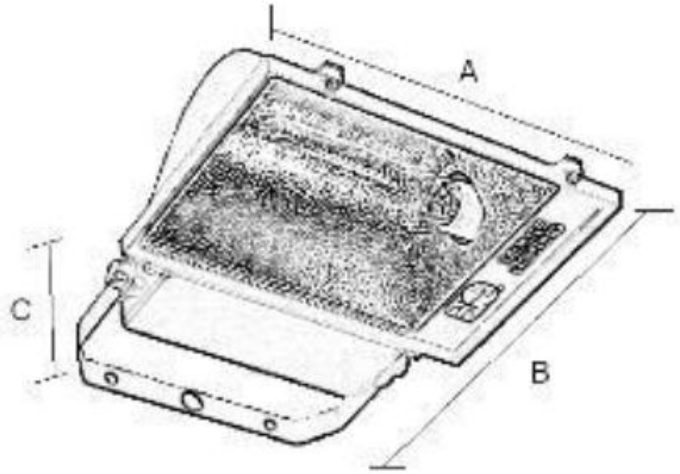

Features
- General purpose floodlight, ideal for large area lighting
- Removable gear tray
- IP65
- Maximum projected area = 0.17m2

Construction
- Die cast aluminium body, black polyester powder coated
- Hinged toughened glass
- Supplied with lamp and gear

Note: Die cast aluminium bodied floodlight for use with high wattage discharge lamps as per 'GIH' range

Cat No	Lamp	A	B	C	Weight (kg)	
GIH400HPI	1 x 400W HPI/T	510	410	155	9.80	
GIH400S	1 x 400W SON/T	510	410	155	11.10	

Floodlights are located on an "L" shaped brackets (see image).
The brackets are secured to the structure by scaffold doubles
>>>>



INFINITY
OUTDOOR LIMITED