



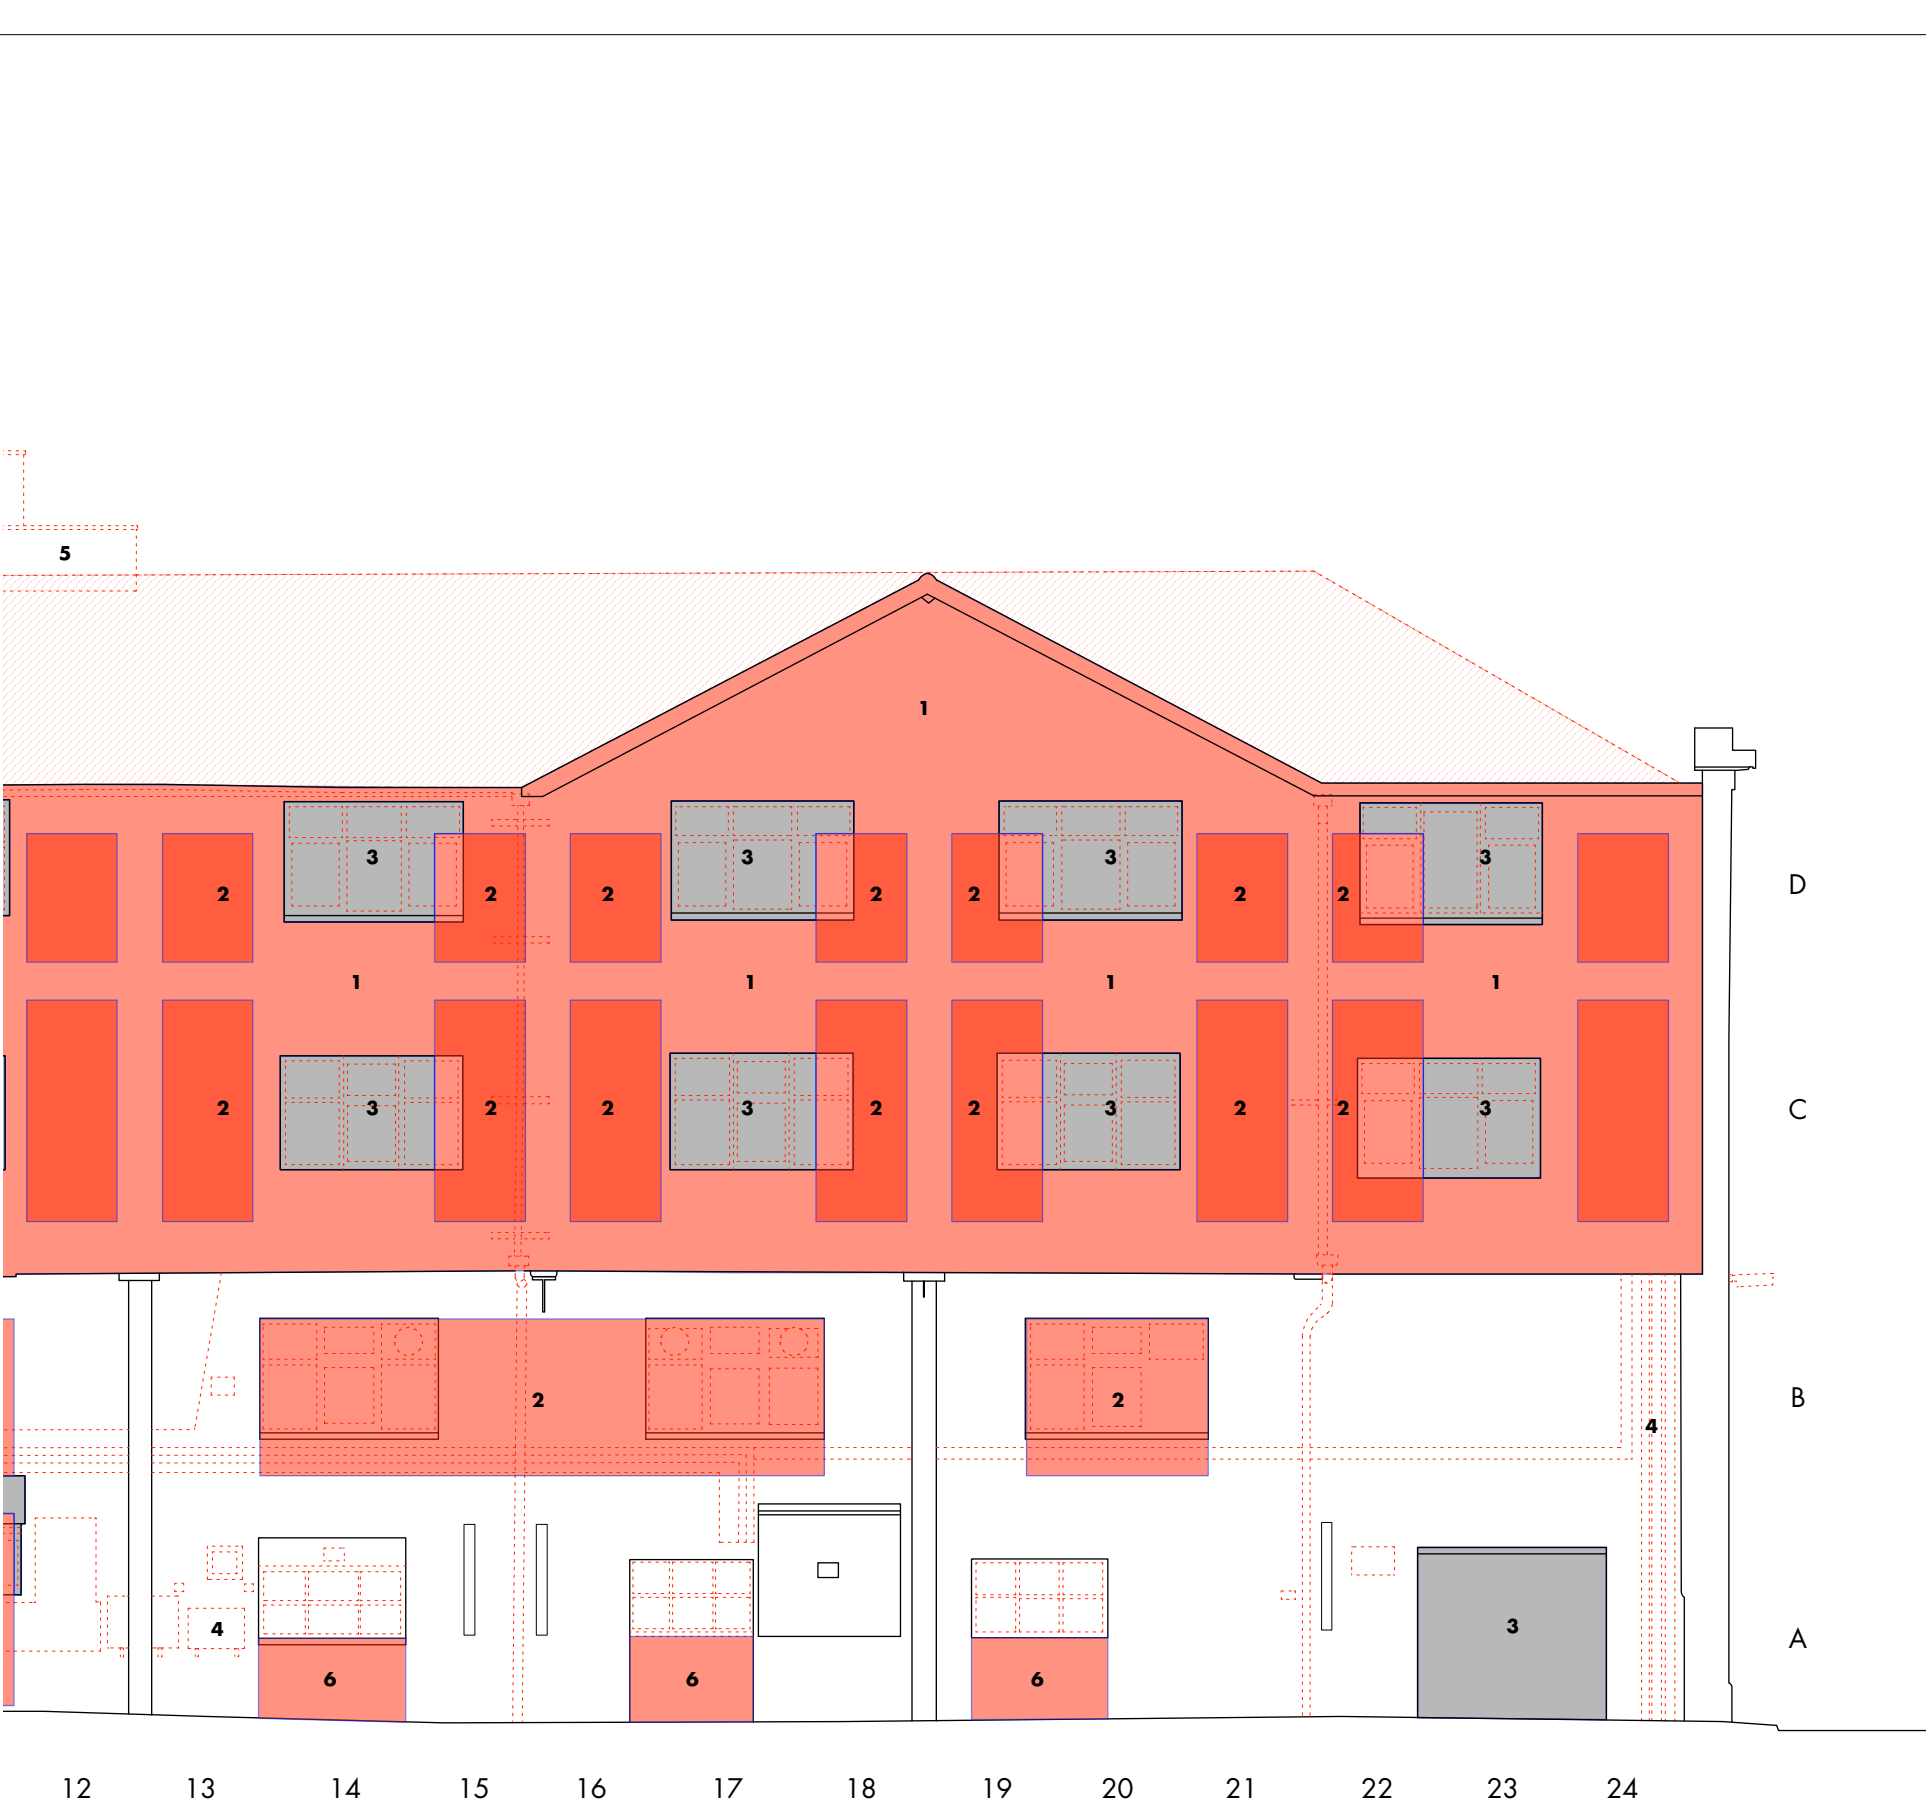

minshull house existing elevation 5b



- key**
- demolition / removal of existing areas
  - proposed alteration to existing wall (blue outline)
  - new brickwork infill to match existing
  - existing tiles to be removed and reclaimed
  - existing brickwork condition to be checked for water penetration and repaired where required
  - existing features / windows to be removed (check notes for repairs / reinstated items)

**notes typically:**

all existing windows / doors to be carefully removed

existing roof finishes / sarking to be completely removed. reclaiming of existing tiles to be confirmed. existing rooflights also to be removed.

all existing loose secondary fixtures to be removed from elevation ahead of cleaning including privacy screens / pillasters / signs etc

all projecting pipes / vents / air con units / alarm boxes / roller shutters / cabled services to elevations to be removed. all connecting services to be safely terminated in advance.

signage related to adjacent areas / adjacent street features to be removed once permissions have been received.

all existing interfacing street lighting to be protected during works where applicable

all existing rainwater goods to be removed from elevation

all chimney pots to be removed, cleaned and reset in original positions

all brickwork / pointing showing signs of water damage (from failed gutters / downpipes etc) to be checked

carry out brickwork repairs locally where necessary. areas of repointing to all elevations not deemed to be lime mortar type to be raked and reinstated as such

existing copings to be inspected and repaired / reset / repointed with lime mortar as required. all areas of foliage and root system to be fully removed

cleaning method to existing brickwork / masonry (cills / lintels etc - both inside/outside) to be agreed with LA

existing dpc to be checked for condition

interfacing buildings (e.g. lock keepers cottage) to be reviewed for flashing completeness / brickwork conditions etc.

- elevation notes:**
- remove existing profiled sheet cladding from elevation
  - new openings to be formed (new superimposed window pattern)
  - existing openings to be infilled to match existing
  - all existing exposed services / trunking etc to be made safe and completely removed
  - existing chimney to be removed
  - existing apertures dropped to create entrances

|                          |                          |
|--------------------------|--------------------------|
| d • planning issue       | 20.01.17 • ch • hlm      |
| c • draft planning issue | 10.11.16 • hlm • ms      |
| b • work stage 2         | 28.07.16 • ejd • hlm     |
| a • draft work stage 2   | 14.07.16 • hlm • ms      |
| • first issue            | 04.07.16 • ju • hlm      |
| rev • description        | issued • drawn • checked |

|                |                                            |
|----------------|--------------------------------------------|
| <b>shedkm</b>  | +44 (0)151 709 8211<br>+44 (0)207 253 8881 |
| project        | kampus • listed buildings                  |
| client         | ASDL                                       |
| drawing number | AW(00)217d                                 |
| scale          | 1:100 @ a3                                 |
| status         | work stage 3                               |

**demolition/remedial works mh 06**

do not scale from this drawing • all dimensions are to be set out and checked on site prior to starting construction • any discrepancy found between information given on this drawing and that given elsewhere or recorded on site shall be brought to the attention of the project architect immediately