




- 1 existing brickwork to be cleaned (method tbc)
- 2 new PPC aluminium windows
- 3 existing stone lintels to be cleaned (method tbc) and repainted
- 4 slate roof re-laid with reclaimed tiles
- 5 new rooflights with central pivot
- 6 existing stone copings to be repaired/replaced where necessary
- 7 new PPC opening vents as part of window system
- 8 new PPC sleeve surround for new aluminium windows
- 9 new extension with black stained timber rainscreen cladding and glazed front
- 10 mature trees
- 11 new cast iron rainwater downpipe + hopper
- 12 black stained timber rainscreen cladding
- 13 new glazed openings with integrated louvers to commercial unit G5
- 14 new slot window in circulation space
- 15 new louvers in existing openings serving commercial units
- 16 new circular vent for MVHR intake/extract
- 17 new windows with louvers at ground floor

note

all windows are drawn with common fenestration. this may change pending further investigation

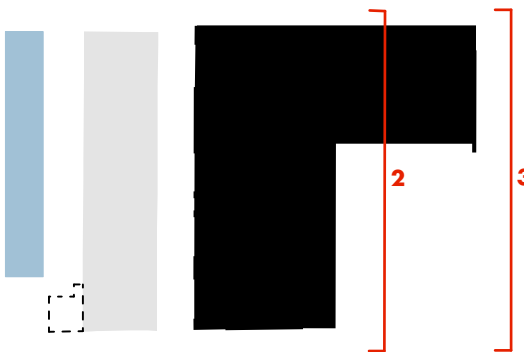

minshull proposed elevation 02 • courtyard



minshull proposed elevation 03 • courtyard including extension

d • planning issue
c • draft planning issue
b • work stage 2
a • draft work stage 2
- • first issue
rev • description

20.01.17 • ch • hlm
10.11.16 • hlm • ms
28.07.16 • ejd • hlm
14.07.16 • hlm • ms
04.07.16 • sv • ms

issued • drawn • checked

project	kampus • listed buildings
client	ASDL
drawing number	AW(00)238d
scale	1:100 @ a1
status	work stage 3

minshull proposed short elevations 02 + 03

do not scale from this drawing • all dimensions are to be set out and checked on site prior to starting construction • any discrepancy found between information given on this drawing and that given elsewhere or recorded on site shall be brought to the attention of the project architect immediately