A2

TECHNICAL DATA SHEET

Platform Lifts to Aid Access

Vertical Rise Platform Lift

400 Kg Capacity

FEATURES

- Compact and self contained – no external control boxes or power packs
- No pit necessary as ramp can be supplied
- Single phase 230V with soft start/stop
- Self supporting shaft
- Fully glazed doors as standard
- Insulated steel or glazed shaft
- Minimal builders works required
- Choice of options and additional equipment
- Emergency battery lowering as standard
- Type approved

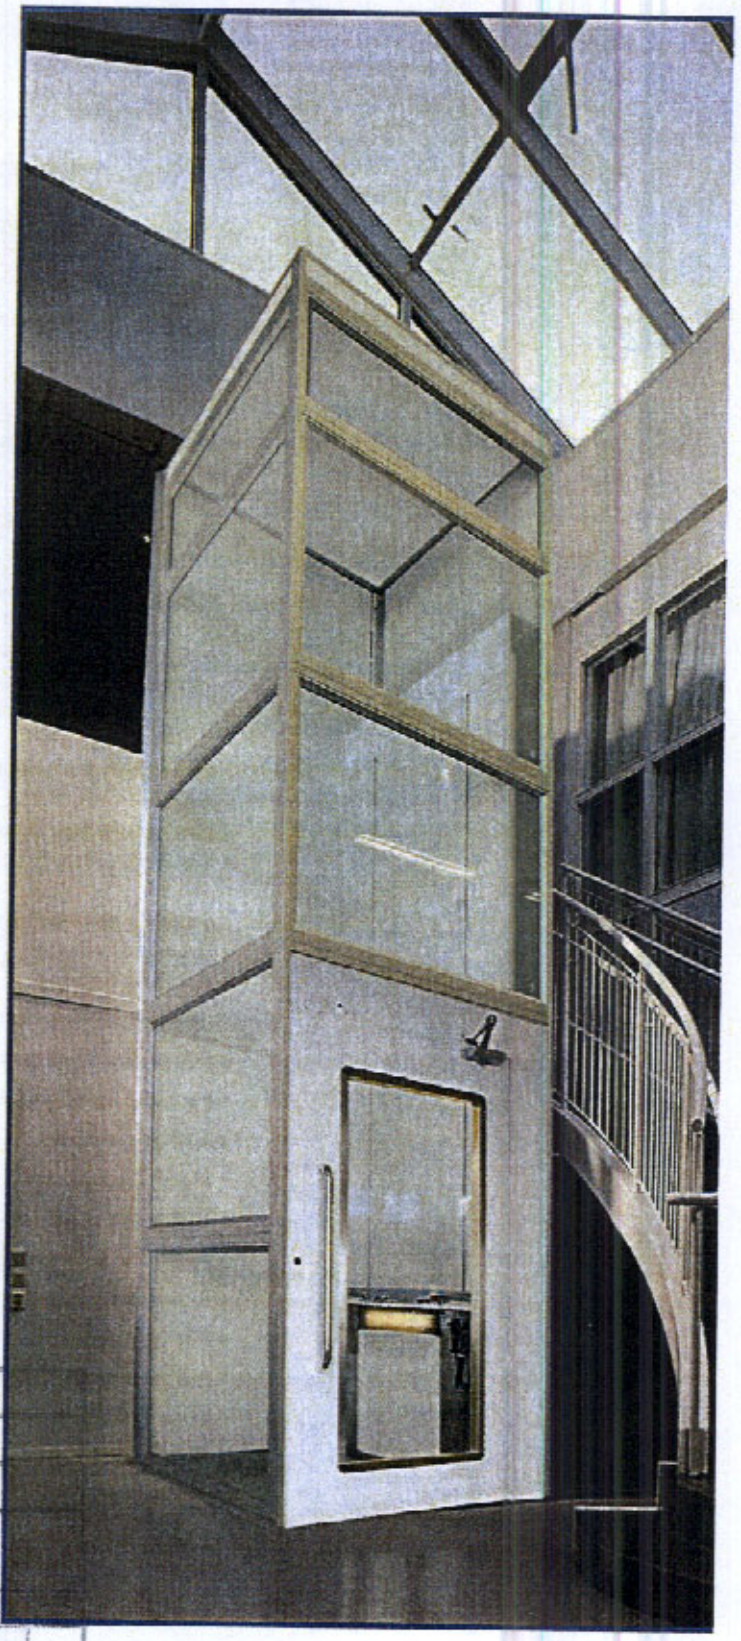

PLANNING
RECEIVED
25 FEB 2008

PICKERINGS LIFTS
Access & Mobility Group

Design, installation and maintenance solutions

Platform Lifts to Aid Access

A2 Data sheet

Vertical Rise Platform Lift

Technical Specification

RATED LOAD	• 400kg
SPEED	• 0.15m/s(max)
TRAVEL	• Up to 7 metres
PLATFORM SIZE	• 1400mm x 1000mm/1100mm
ENCLOSURE SIZE	• 1497mm x 1375/1475mm
PIT SIZE	• 50mm deep (or short ramp required)
HEADROOM	• 2400mm
FINISH	• White paint and aluminum trim as standard
POWER SUPPLY	• 230v single phase with soft start
DRIVE SYSTEM	• Self sustaining screw drive
CONTROL	• Large constant pressure controls on platform console • Upper and lower landing controls
EMERGENCY SYSTEM	• Emergency battery lowering • Alarm • Emergency stop button • Battery back up lighting on console
SAFETY SYSTEMS	• Solenoid door locking • Overload Indicator • Non-Slip flooring
OPTIONS	• Power operated doors • Partially or fully glazed shaft • Additional colours • Alarm with beacon • 1 hour fire resistant door • Ramp for pit-free installation • Adjacent entry and exit configuration • Key operated controls • Autodialler communication system • Voice annunciation • Tactile push buttons • Position indicators on landings • Shaft roof lighting

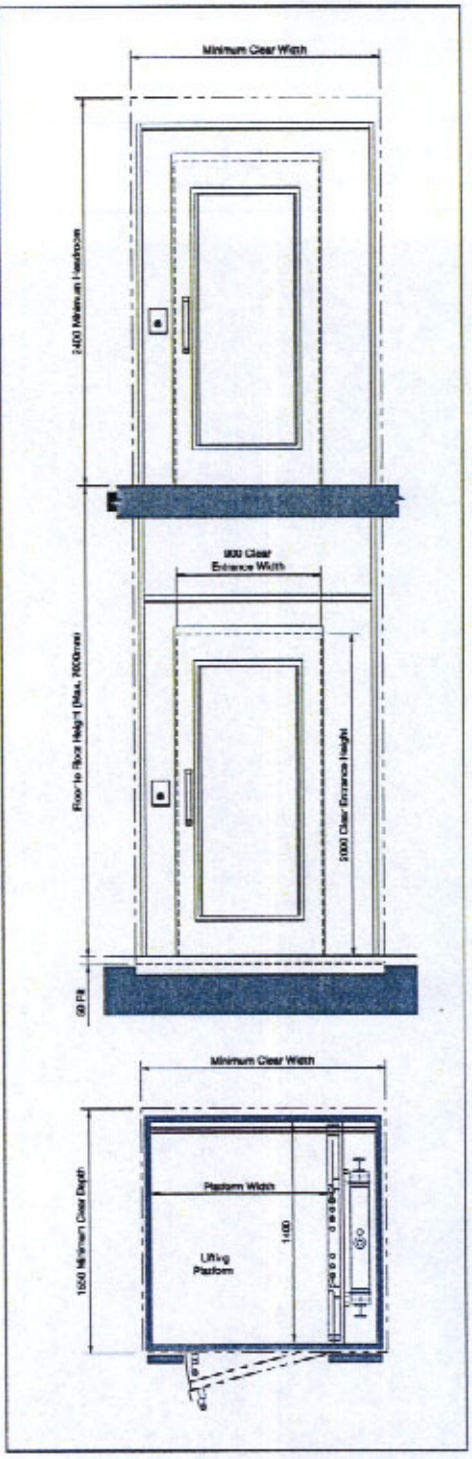

PICKERINGS LIFTS
Access & Mobility Group

PICKERINGS LIFTS