Photovisual



Proposed



Existing

© Copyright Tetlow King. This document is the property of Tetlow King and must not be used, reproduced or disclosed to any persons without written consent from Tetlow King.

Photovisual



Proposed



Existing

© Copyright Endpoint Ltd. this document is the property of Endpoint and must not be used, reproduced or disclosed to any person without written consent from Endpoint.

Photovisual



Proposed



Existing

© Copyright Indpact Ltd. This document is the property of Bridport and must not be used, reproduced or disclosed to any persons without written consent from Bridport

Photovisual



Proposed



Existing

© Copyright Ledgard Ltd. This document is the property of Endorsed and must not be used, reproduced or disclosed to any persons without written consent from Ledgard

Lighting - External



Building illumination

Purple flood uplighting to building elevation using 60 degree spread of light.

Purple wash effect.

New electrical feed required. Actual units require cat5 cabling to each location.

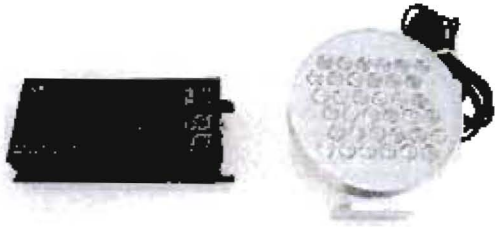

Driver unit run from 230VAC input supply, output is 14V maximum per channel, connection to driver via RJ45 data cables.

IP67 external rated LED projector with 60 degree flood beam, maximum light output is 9W per unit. Bespoke fixed purple colour output for Premier Inn application.

© Copyright Endpoint Ltd. This document is the property of Endpoint and must not be used, reproduced or disclosed to any persons without written consent from Endpoint.

General photographs



© Copyright Bird Lovell Ltd. This document is the property of Bird Lovell and must not be used, reproduced or disclosed to any persons without written consent from Footprint