FDTC50VF

Ceiling cassette - Indoor Unit



The FDTC50VF is a ceiling cassette RAC indoor unit with a nominal cooling capacity of 5.0 kW.


-

Technical Specifications


General Data

Nominal cooling capacity	kW	5
Nominal heating capacity	kW	5.8
Exterior Dimensions (H x W x D)	m m	Unit: 248 x 570 x 570 Panel: 35 x 700 x 700
Net Weight	kg	18.5 (Unit: 15 Panel: 3.5)
Air Flow Cooling (Hi/Me/Lo)	m3/min	11.5 / 9.0 / 7.0
Air Flow Heating (Hi/Me/Lo)	m3/min	11.5 / 9.0 /8.0
Sound Pressure Level Cooling (Hi/Me/Lo)	dB(A)	42 / 36 / 30
Sound Pressure Level Heating (Hi/Me/Lo)	dB(A)	42 / 36 / 32

Schematics

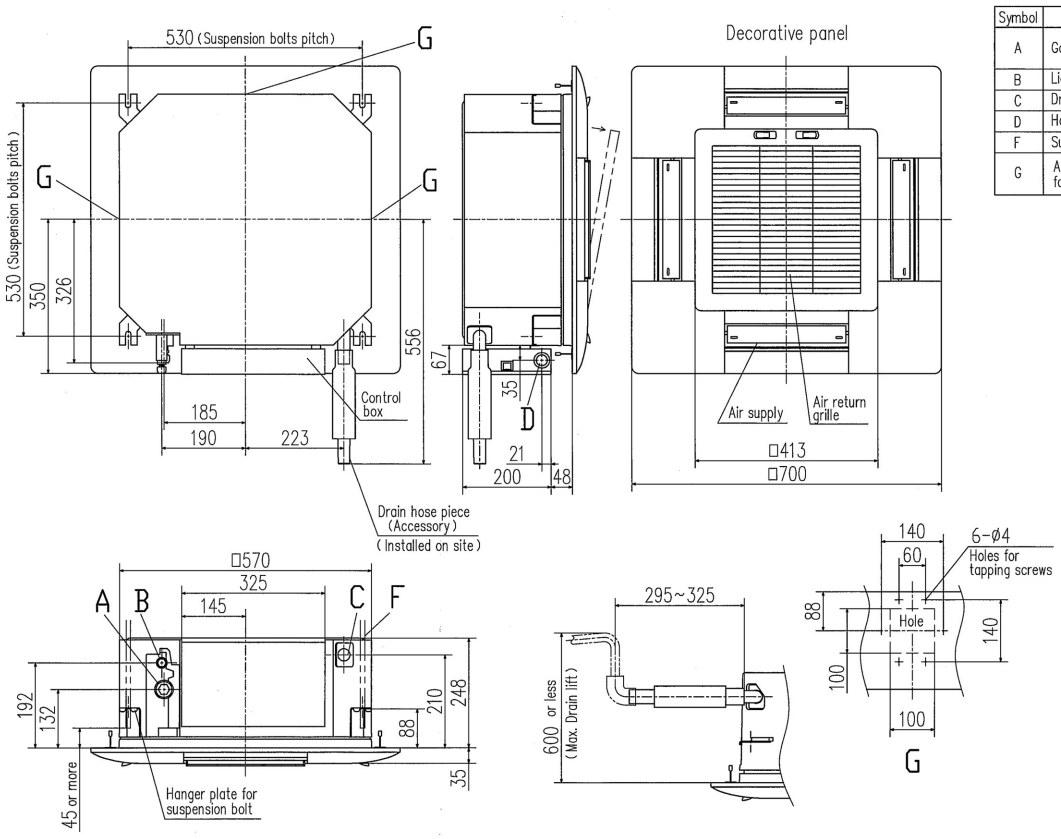

Symbol	Content		
A	Gas piping	Model	25,35 : ø9.52 (3/8") (Flare)
			40~60 : ø12.7 (1/2") (Flare)
B	Liquid piping	ø6.35 (1/4") (Flare)	
C	Drain piping	VP20 (I.D.20,O.D.26) Note (2)	
D	Hole for wiring	ø25	
F	Suspension bolts	(M10 or M8)	
G	Air outlet opening for ducting	(Knock out)	



Make a space of 4000 or more between the units when installing more than one.

