

Plant Schedule					
Abb	Species	Pot	Size	Density	Total
Shrub Planting					
CID	Carex 'Ice Dance'	5L	30-40	5sq.m	20
ClV	Ceanothus thyrsiflorus 'Victoria'	5L	40-50	3sq.m	18
Sh	Sarcococca humilis	5L	30-40	3sq.m	9
EFH	Euonymus fortunei 'Harlequin'	5L	20-30	5sq.m	14
FgEB	Festuca glauca 'Elijah Blue'	5L	20-30	5sq.m	20
HGG	Hebe 'Green Globe'	5L	20-30	3sq.m	12
HMW	Hebe 'Midsummer Winder'	5L	40-50	3sq.m	12
LIG	Lavendula x intermedia 'Grosso'	5L	20-30	5sq.m	9
ScKG	Skimmia confusa 'Kew Green'	5L	30-40	3sq.m	12
Specimen Planting					
Vb	Verbena bonariensis	10L	40-50	Ind	18
Tree Planting		Spec	Height		Total
Ac	Acer campestre	14-16cm girth	Extra Heavy	Standard	1
Bj	Betula jacquemontii	Multi-stem	3-4m high		2
PI	Prunus lusitanica - Pleached tree	14-16cm girth	Extra Heavy	Standard	1
Bulb Planting		Density (per m2)	Total Area		Number
AhPS	Allium hollandicum 'Purple Sensation	10	6 m2		42
Ep	Echinacea purpurea	10	4 m2		22
NB: Please do not substitute any of the plants listed above fro smaller specimens or other or other species unless agreed with the client or landscape architect.					

PLANTING NOTES:

1.

Plant handling at the nursery, and during transit up to delivery, shall be in accordance with 'Plant Handling', the booklet published by the Committee for Plant Supply and Establishment (CPSE). The contractor shall comply with clauses 3 & 4 of the above booklet (obtained from the Horticulture Trades Association, 19 High Street, Theale, Reading, Berks RG7 5H) which refers to the receipt, unloading and temporary storage of plants
2.

Plants shall be first class examples of their species or variety, free from all pests and diseases, with good fibrous root systems and materially undamaged (refer to relevant sections of BS3936 Parts 1-4 'Specification of Nursery Stock').
3.

All planting is to be in general compliance with BS4428: 1989 'Code of Practice for general landscape operations.

i)Tree Planting: A peat free compost and slow release tree fertiliser should be incorporated into the back fill material for all trees.

ii) Multi-stemmed and 14-16cm girth trees to be secured with a single timber stake to prevent movement and to be planted in pits 1000 x 1000 x 750mm deep and base broken out to facilitate drainage.
4.

Shrub Beds and Planting General:

i) All beds should be free draining and free from builders rubble and large stones. There should be min 450mm of good quality top soil to all the shrubs beds (which is expected to be supplied by the house builder).

ii) Areas to be treated with a non-residual glyphosate based herbicide prior to planting and cultivated to a depth of 150mm.

iii) A slow release fertiliser mixed with a peat free compost should be incorporate into the back fill material when planting the shrubs to give them the best possible chance of establishment.

iv.) For hedges dig a trench the full length of the hedge 500mm wide x 400mm deep and break up the base to facilitate drainage.

5.

Finishing Beds:

i) The finished surface of the bed should be free from weeds, stones or rubble and the surface of the soil cultivated to level out any clumps, mounds or depressions.

ii) When planted all shrub beds are to be mulched with 50mm depth of small grade bark mulch.

iii) The beds should be maintained weed free and the beds topped up annually with bark mulch as required.
6.

Watering:

All Trees, Hedges and Shrub beds to be watered regularly in the first year of establishment until the roots have established. Increased site visits will be required in periods of drought when there has been no or limited rainfall in a two period. In this case water all of the shrubs beds and grass until the ground is fully saturated to avoid the plants dying. For the trees in the first year of establishment and in subsequent years if there is a drought. Water with the following volumes once every 2-4 weeks regardless of rainfall: 14-16cm and multi-stemmed: 150 litres minimum per month
7.

Weeding:


All shrub beds to be maintained weed free by regularly hand weeding the beds. Do not use weed killer. Maintaining the bark mulch will also help to naturally reduce weed growth and maintain moisture in the soil. Top up in year two and subsequent years for the duration of the sales arena.
8.

The contractor must ascertain himself/herself of the exact location of underground services prior to carrying out any digging on site.

LEGEND

LANDSCAPING - PLOT LANDSCAPE

- Existing Trees - Retained
- Proposed Ornamental Trees
Flowering trees to be planted as 14-16cm girth Extra Heavy Standards
- Proposed Ornamental Planting 5L plants with 10L Feature Specimens
- Proposed Seasonal Bulb Planting
To be randomly planted in groups of 3-5 within indicated beds
- Red Line Boundary

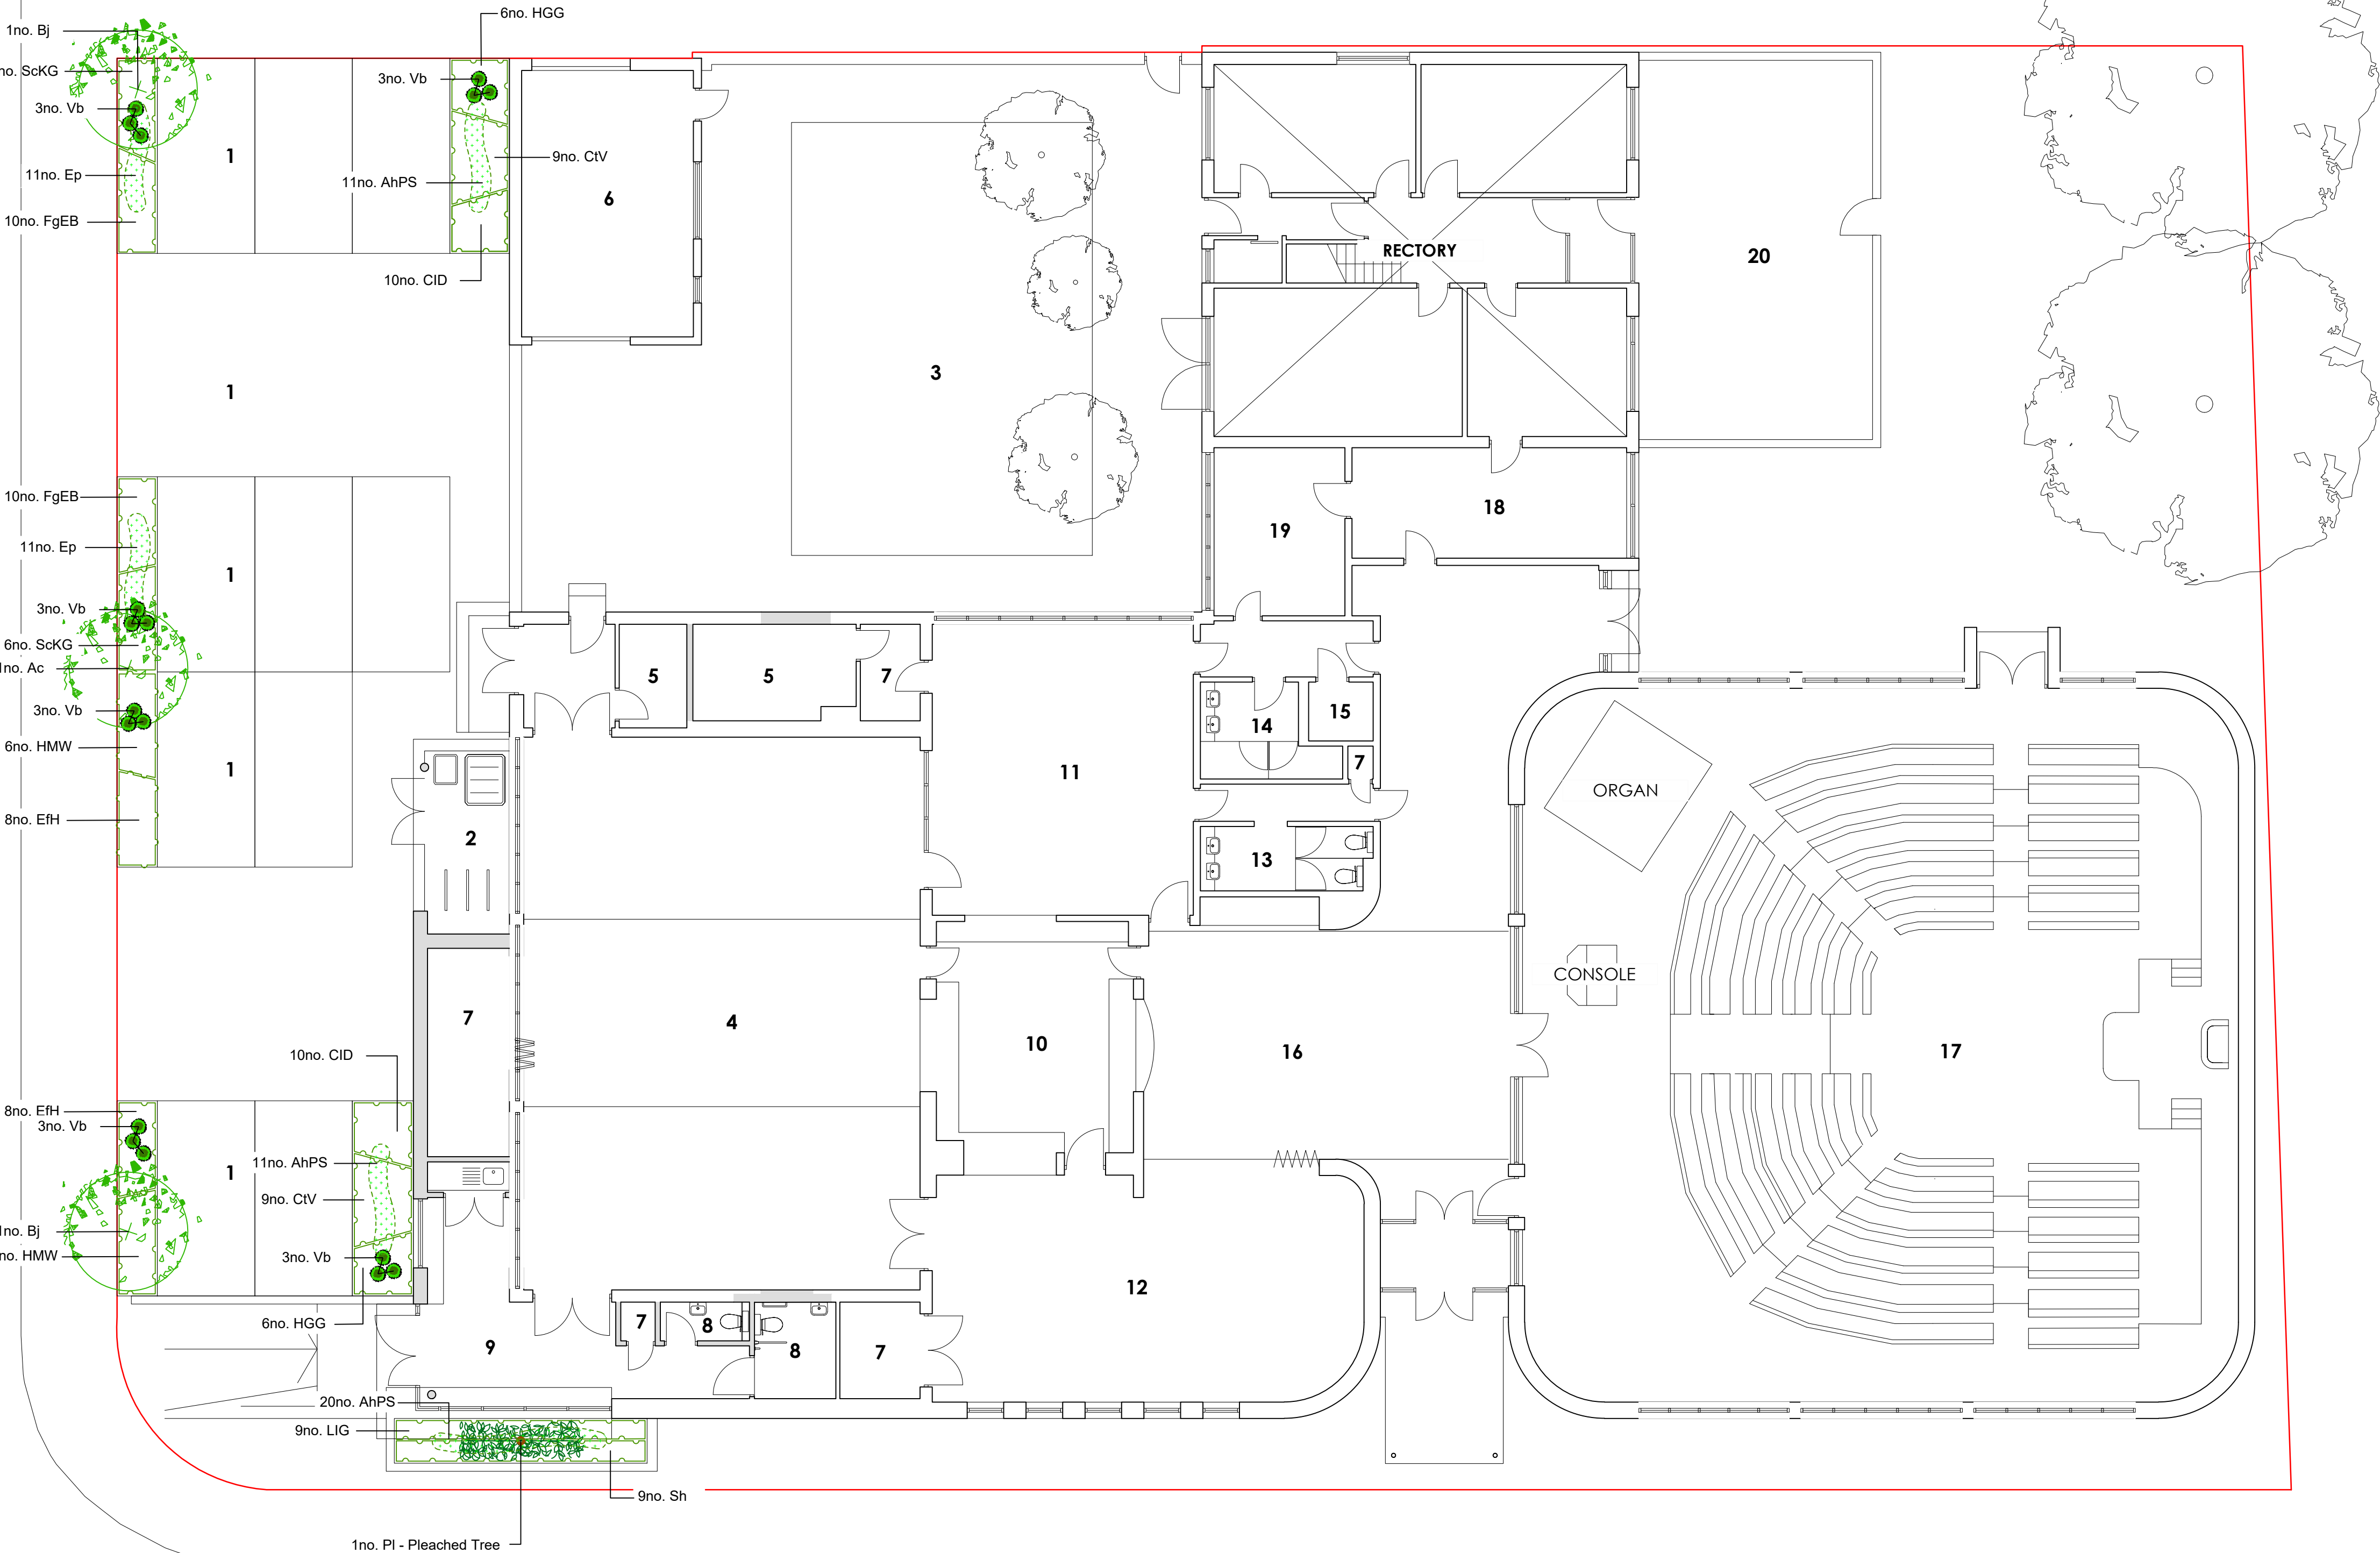

BRUNSWICK STREET

DEP LANDSCAPE ARCHITECTURE LTD

2 COMMERCIAL STREET
MANCHESTER, M15 4RQ
T: 0161 2419878
E: info@dep.co.uk
W: www.dep.co.uk

Client
OMI Architects

Project
Brunswick Church

Description
Landscape Layout and Planting Plan

Status
For comment

Scale
1:100@A1

Job number
4734

Drawn
MI (AH)

Drawing number
01

Date
MAR 21

Revision
-

Copyright DEP Landscape Architecture Ltd

All levels and dimensions to be checked on site by contractor prior to commencement; Any variations to be reported to the client. This drawing is to be read in conjunction with all others relating to the project and all information derived accordingly; any anomalies to be reported to the client. Do not scale from this drawing. Use figured dimensions only. Work shown on this drawings to be carried out in accordance with current British Standards and Codes of Practice.

© Copyright to DEP Landscape Architecture Limited. The information shown on this drawing shall not be reproduced or copied in any form without prior written consent from DEP Landscape Architecture Limited.