ecolux II

PLANNING AND
BUILDING CONTROL
28 MAR 2014

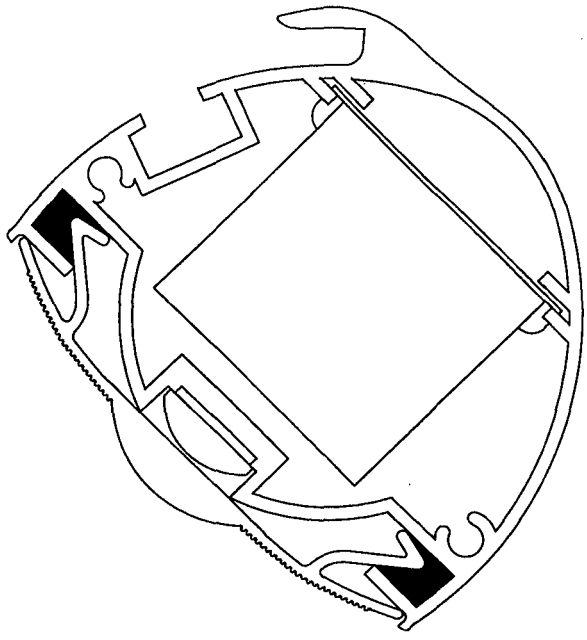



options

Cold or Warm White LED colour.

Non-standard brackets available upon request.

Standard and non-standard colours.

Photo electrical cell switches.

technical specification

LED strip

Latest high lighting chip technology giving 70 lumens per watt output.

Over 1000 Lumens per metre LED output.

Only 14.4 watts per metre power consumption 75% energy saving compared to Fluorescent.

24 volt input, less current less voltage drop.

6000k cool white or 3000k warm white 120 degree angle.

IP65 protected, 50,000 hours+ lamp life.

2 year Warranty.

Full CE certification and ROHS compliant.

Drivers

Epoxy encapsulated fully isolated case with IP67 protection.

Constant voltage design.

Short circuit, over current, over voltage protection.

Fitted onto Kwik release slide in Gear Trays.

Full CE certification and ROHS compliant.

Light Fitting

Specially designed 50mm diameter aluminium extrusion supplied up to 6000mm lengths which can be joined together using cast aluminium connectors.

Die cast aluminium end caps.

Standard 300mm Kwik Fit brackets.

Snap-in polycarbonate 90 degree magnifying lens diffuser.

Casing sealed and certificated to IP64.

Full CE certificate and 2 year parts warranty.

Conforms to BS 4533: SECTION 102.1:1990 / EN60598-2-1:1989 and BS EN60598-2-6:1995 with BS EN 60598-1:2008 "UK Deviations Only"

(The manufacturer's reserve the right to alter specifications without prior notification.)

Insignia

Commercial LED Lighting

LED-flood

PLANNING AND
BUILDING CONTROL
2 8 MAR 2014



Data sheet

Black 30W LED Flood Light Code CLF301

The 30W LED IP65 Waterproof Outdoor flood Light has a robust Aluminium alloy body with a toughened glass. It is an efficient light Source with potential energy savings of up to 80% in running costs compared with Halogen flood lights

- Ideal for security lighting
- Waterproof IP65 - Safe for out door use
- Ultra bright energy efficient LED light engine
- Instant full light out put on switch on.
- Dimentions 227 x 185 x 125
- Wiring 3 core flex
- Technical Spec Complient with CE/ROHS
- Supply Voltage 240V
- Colour Temp 6500-2700K

Commercial LED Lighting Ltd 25 Romer Street Bolton BL2 6BG TEL 0844 682 9945 FAX 0844 682 0900

E-mail sales@clluk.com Web www.clluk.com