MITSUBISHI ELECTRIC
AIR CONDITIONING SYSTEMS

PUHY-P400YJM-A

Standard Y Series 16hp Outdoor Unit

R410A Heat Pump



The City Multi Y Series makes use of a two pipe refrigerant circuit throughout, with the choice of either Branch Pipe or Header Pipe feeds to indoor units, with manual changeover from cooling to heating to ensure that a constant indoor climate is maintained.



Pictures not to scale

Product Details

PUHY-P400YJM-A	
Capacity (kW):	
Heating (Nominal)	50.0
Cooling (Nominal)	45.0
Heating (UK)	47.5
Cooling (UK)	42.3
Power Input (kW) Heating (Nominal)	12.82
Power Input (kW) Cooling (Nominal)	13.11
Power Input (kW) Heating (UK)	17.18
Power Input (kW) Cooling (UK)	8.46
Max No. of Connectable Indoor Units	34
Airflow(m3/min)	210
Noise (dBA)	61
Width - mm	1220
Depth - mm	760
Height - mm	1710
Weight - kg	250
Electrical Supply	380-415v, 50Hz
Phase	3
Mains Cable No. Cores	4 + earth
Starting Current (A)	8
Running Current (A) - Heating	19.8
Running Current (A) - Cooling	20.2
Fuse Rating (BS88) - HRC (A)	32

Piping Restrictions	
Total Piping Length (m)	1000
Furthest Piping Length (m)	165
Furthest Piping Length after 1st Branch (m)	40
Between Indoor and Outdoor Units - Height (m)	50
Between Indoor and Indoor Units - Height (m)	15

Dimensions

PUHY-P400YJM-A

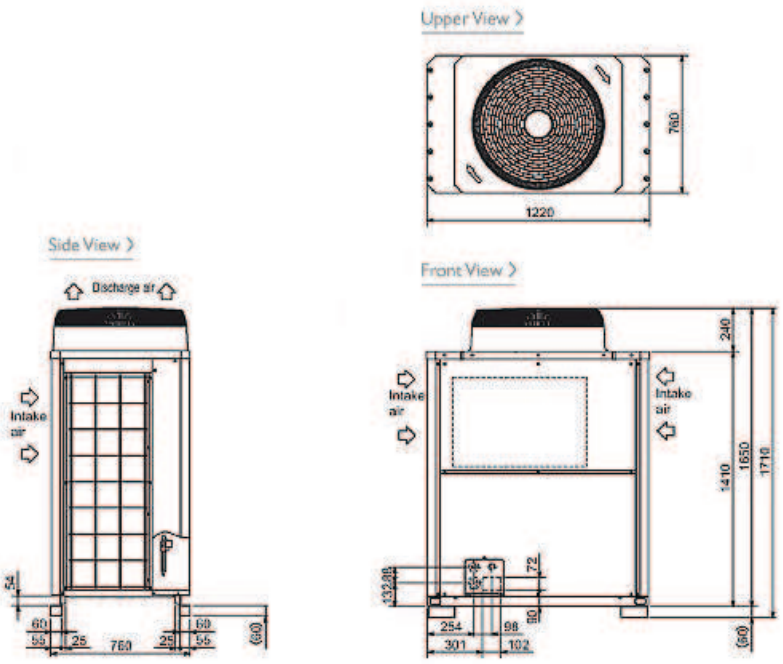

MITSUBISHI ELECTRIC
AIR CONDITIONING SYSTEMS

Telephone: 01707 282880
Email: air.conditioning@meuk.mee.com Website: http://www.mitsubishielectric.co.uk/aircon

Mitsubishi Electric reserves the right to make any variation in technical specification to the equipment described, or to withdraw or replace products without prior notification or public announcement.

Tel:
Fax: