
Technical Data


Model	KVA (Kw)	Engine	Alternator	Noise Levels		Fuel Tank Capacity:	Consumption Ltrs/hr (US Gal/hr)		Running Time (Hrs)	
				LWA	dBA @ 7m	Litres (US Gal)	50 Hz	60 Hz	50 Hz	60 Hz
XD20P2	20 (16)	404C-22G2	LL1014N	87	64	50 (13.2)	5.7 (1.5)	n/a	8	n/a
XD27P1	27 (21.6)	3.1524	LL1014S	92	61	232 (61.3)	7.6 (2.0)	8.6 (2.3)	27	24
XD45P1	45 (36.0)	1004G	LL2014D	97	67	593 (156.7)	13.4 (3.5)	14.7 (3.9)	40	36
XD75P1	75 (60.0)	1004TG2	LL2014J	94	65	593 (156.7)	18.6 (4.9)	21.2 (5.6)	28	26
XD100P1	100 (80.0)	1006TG2A	LL3014B	94	66	1766 (202.4)	23.2 (6.1)	26.8 (7.1)	30	26
XD135P1	135 (108.0)	1006TAG	LL3014F	95	67	766 (202.4)	31.0 (8.2)	35.8 (9.5)	22	19
XD200P1	200 (160.0)	1306-E87TA300	LL5014H	98	69*	1200 (317.0)	42.7 (11.3)	53.0 (14.0)	26	20
XD250P1	250 (200.0)	1306-E87TA330	LL5014J	98	70	1200 (317.0)	48.5 (12.8)	56.5 (14.9)	22	19
XD350P1	350 (280.0)	2306C-E14TAG2	LL6014B	tba	64	815 (215)	72.5 (19.2)	84.9 (22.4)	11	9

* Awaiting Certification

Options

Electronic governor, battery charger, engine water heaters, flap valve for engine shutdown, and a range of alternator options are available. Running gear for easy mobility of enclosure is now also available on models XD20P2 to XD100P1.

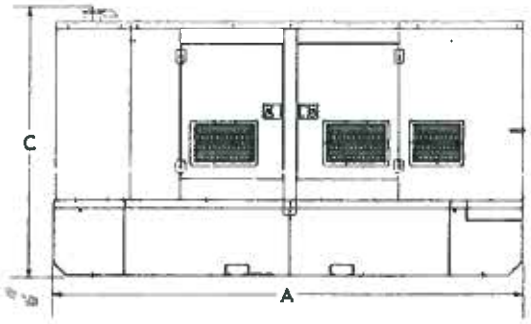



Note: XD20P2 Panel side mounted

Dimensions and Weights

Model	A: mm (in)	B: mm (in)	C: mm (in)	Weight: kg (lb)
XD20P2	1684 (66.3)	950 (37.4)	1347 (53.0)	714 (1547.4)
XD27P1	2500 (98.4)	1155 (45.5)	1660 (65.4)	1640 (3616)
XD45P1	2900 (114.2)	1155 (45.5)	1940 (76.4)	2040 (4498)
XD75P1	2900 (114.2)	1155 (45.5)	1940 (76.4)	2160 (4763)
XD100P1	3570 (140.6)	1155 (45.5)	2030 (79.9)	2540 (5601)
XD135P1	3570 (140.6)	1155 (45.5)	2030 (79.9)	2810 (6196)
XD200P1	4250 (167.3)	1320 (52.0)	2445 (96.3)	3980 (8776)
XD250P1	4250 (167.3)	1320 (52.0)	2445 (96.3)	4110 (9063)
XD350P1	5050 (198.8)	1800 (70.9)	2300 (90.6)	7500 (16538)

Note: All figures are 100% full load. Weights are given with oil and coolant but **excluding** fuel.

For further information contact Rental Sales on Tel: +44 (0) 28 2826 1000 Fax: +44 (0) 28 2826 1111 E-mail: sales@FGWilson.com

LLOYD'S REGISTER QUALITY ASSURANCE ISO9001

MEMBER HIRE

In line with our policy of continuous product development, we reserve the right to change specification without notice