


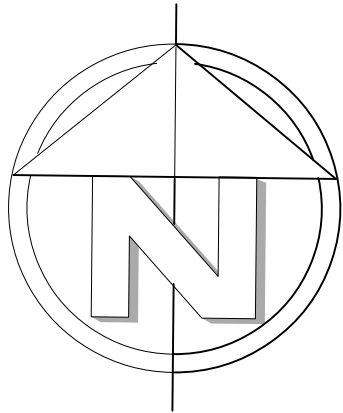

TREE PLANTING			
Species	Size	Type	No.
Acer campestre 'Streetwise' (Ac)	12-14 cm girth	Rootballed	2
Crataegus laevigata 'Crimson Cloud' (Cl)	12-14 cm girth	Rootballed	2
Malus tschonoskii 'Belmonte' (Mt)	12-14 cm girth	Rootballed	3
Prunus x Sargentii (Ps)	12-14 cm girth	Rootballed	2
		TOTAL	9
HEDGEROW PLANTING			
3 per lin m			
Species	Size	Type	No.
Prunus laurocerasus	45-60cm	5L	156
		TOTAL	156

SUGGESTED ORNAMENTAL SHRUB SPECIES			
Species	Size (cm)	Type	Density
Aucuba japonica 'Crotonifolia'	60-90 cm	5L	1.25 per m2
Berberis julianae	45-60 cm	3L	1.25 per m2
Chaenomeles 'Crimson and Gold'	45-60 cm	5L	2 per m2
Choisya 'Aztec Pearl'	45-60 cm	5L	2 per m2
Cistus x corbaniensis	45-60 cm	5L	3 per m2
Cotinus 'Flame'	45-60 cm	3L	1.25 per m2
Cotoneaster conspicuus 'Decorus'	30-40 cm	5L	5 per m2
Cotoneaster 'Skogholm Coral Beauty'	30-40 cm	3L	5 per m2
Cytisus x kewensis	45-60 cm	3L	4 per m2
Elaeagnus pungens 'Macculata'	60-90 cm	5L	1.25 per m2
Escallonia ivelyii	45-60 cm	3L	2 per m2
Euonymus 'Silver Queen'	30-40 cm	3L	5 per m2
Fuchsia 'Mrs Poppo'	45-60 cm	3L	2 per m2
Genista lydia	45-60 cm	3L	3 per m2
Hebe 'Marjorie'	45-60 cm	3L	3 per m2
Hedera helix 'Glacier'	30-40 cm	1L	5 per m2
Lavandula stoechas	45-60 cm	3L	4 per m2
Lonicera nitida 'Maygreen'	45-60 cm	3L	3 per m2
Mahonia x media 'Charity'	60-90 cm	5L	2 per m2
Phormium tenax 'Yellow Wave'	60-90 cm	10L	specimen
Pieris 'Forest Flame'	60-90 cm	3L	2 per m2
Prunus 'Zabelliana'	45-60 cm	3L	2 per m2
Rhododendron 'Bagshot Ruby'	60-90 cm	5L	1.25 per m2
Rhododendron 'Cunningham White'	60-90 cm	5L	5 per m2
Skimmia 'Rubella'	45-60 cm	5L	2 per m2
Spirea 'Firelight'	45-60 cm	3L	2 per m2
Viburnum opulus 'Sterile'	45-60 cm	3L	5 per m2

PLANTING SCHEDULES

	Proposed extra heavy standard tree
	Proposed ornamental shrub planting & specimen shrubs
	Existing trees & vegetation to remain
	Proposed grass areas
	Proposed hedgerows
	Proposed Marshalls Drivesett Savanna in Pennant Grey
	Proposed Marshalls Drivesett Savanna in Charcoal as trim edge soldier course to edges of footpath and drives(as shown)
	Proposed Indian Sandstone paving to patios and front door steps

KEY

1. Plant handling at the nursery, and during transit up to delivery , shall be in accordance with 'Plant Handling' the booklet published by the Committee for Plant Supply and Establishment (CPSE). The contractor shall comply with clauses 3 & 4 of the above booklet (obtained from the Horticulture Trades Association) which refers to the receipt, unloading and temporary storage of plants.

2. Plants shall be first class examples of their species or variety, free from all pests and diseases with good fibrous root systems and materially undamaged. (Refer to relevant sections of BS3936 Parts 1-4 'Specification of Nursery Stock')
3. All planting is to be in general compliance with BS4428: 1989 'Code of Practice for general landscape operations (excluding hard surfaces)'.

4. All trees are to be staked and secured as followed:
i) All Heavy Standard trees are to be double staked to 750mm above ground and secured using a single rubber tie and spacer

5. One number 80 litre bag of tree planting compost (non peat based) is to be incorporated into the tree pits. Compost must be thoroughly mixed with with excavated (or imported) topsoil.

6. The contractor must ascertain for himself the exact location of any under-ground services and maintenance points.

7. At the time of planting and seeding areas will have topsoil prepared to an approved depth: -

- i) Topsoil to planting areas (within plant beds) to be 400mm deep
- ii) Topsoil to grass areas to be 150mm deep

8. Plants shall be planted in groups of 3-7no.

9. Water as necessary to ensure the establishment and continued thriving of planted and grassed matter.

10. Carry out all work when soil and weather conditions are suitable:
i) Do not plant during periods of frost or strong winds. Plant only during the following periods: -
- Bare root deciduous trees and shrubs: Late October to late March
- Container grown plants: At any time if ground water and weather conditions are favourable.

11. All planted areas to be mulched to a consolidated depth of 75mm using an approved amenity grade bark mulch

12. Ensure that adequate weed control is available.

PLANTING NOTES

REV A
REV B
REV C

Additional tree planting
Removal of existing hedge & proposed replacement
Paving specification, plot 1 parking & plot 4 garden

Aug 2019
Sept 2019
March 2021

VS
VS
VS

72 Errwood Rd, Burnage

D Moore Esq

Proposed Residential Development
12 Apartments

Landscape General Arrangement Plan

PR/19/DM02/GA/01 REV C

Contractors are advised to check dimensions
with the architect before setting out on site

The
plant
room

Vanessa Swift Bsc Dip LA CMLI
Landscape Architect
M: 07918 081407
F: 08717 145212
E:vanessa@theplantroom.co.uk
www.theplantroom.co.uk

July 2019

1:200 @ A1