
Tamlite Lighting
Data Sheet

Order Code: CWLA160T4WWBM3

CITY WLA Exterior Wall Light 11W - Fixed output - Emergency - 3000K

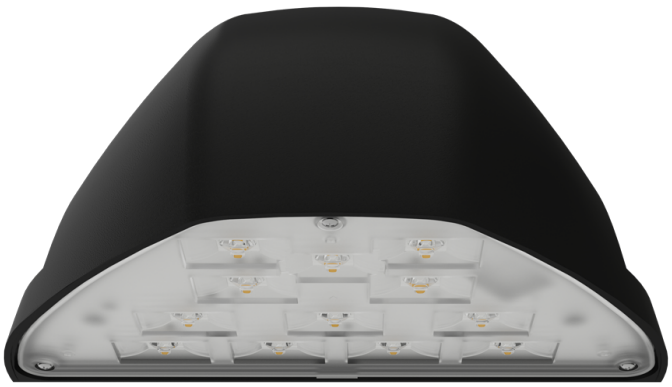

Features

- Suitable for exterior urban areas
- T4 Area optic
- Maximum of 13m spacing, at 3m mounting height
- CRI: Ra>80
- Efficacy - 145 lm/W

Construction

- Dual conduit design allows loop-in and loop-out wiring or conduit and photocell installation on both sides simultaneously
- Die-cast aluminium body finished in Black (RAL 9005)
- Integral driver simplifying installation
- Supplied in warm white (3000K) LED

To Specify

CITY WLA Exterior Wall Light 11W - Fixed output - Emergency - 3000K as per Tamlite CITY WL T4 range.

Technical Data

General

Luminaire Wattage (W)	11
Weight (kg)	2.92
Operating Temperature (°C)	5° to 25°

Light Output

Lumens (lm)	1600
Efficacy (lm/W)	145
Beam Angle (FWHM°)	13477

Life

L90 Lifetime (HRS)	47041
L80 Lifetime (HRS)	94000
L70 Lifetime (HRS)	96000

Electrical

Rated Input Current (A)	0.05
Power Factor (pf)	0.9
Input Voltage Range (VAC)	220 to 240
Inrush Current Peak (A)	199
Surge Protection (kV)	1
Total Harmonic Distortion (THD)	<<10%%
Output LF Ripple	±5%
Conductor Size (mm)	0.5 to 2.5
Terminal Type	4 POLE GRIP WIRE

LED

CCT (K)	3000
CRI	>80
Macadam Elipses	3.2

Driver

Driver Current (mA)	275
Forward Voltage (V)	33
Driver Lifetime (HRS)	100000

Emergency


Emergency Lumen Operating	360
Emergency Wattage (W)	3

Tamlite Technical
Stafford Park 12
Telford, Shropshire,
TF3 3BJ


T: +44 (0)1952 292441
E: technical@tamlite.co.uk
W: www.tamlite.co.uk

Tamlite Lighting
Data Sheet

Photometrics

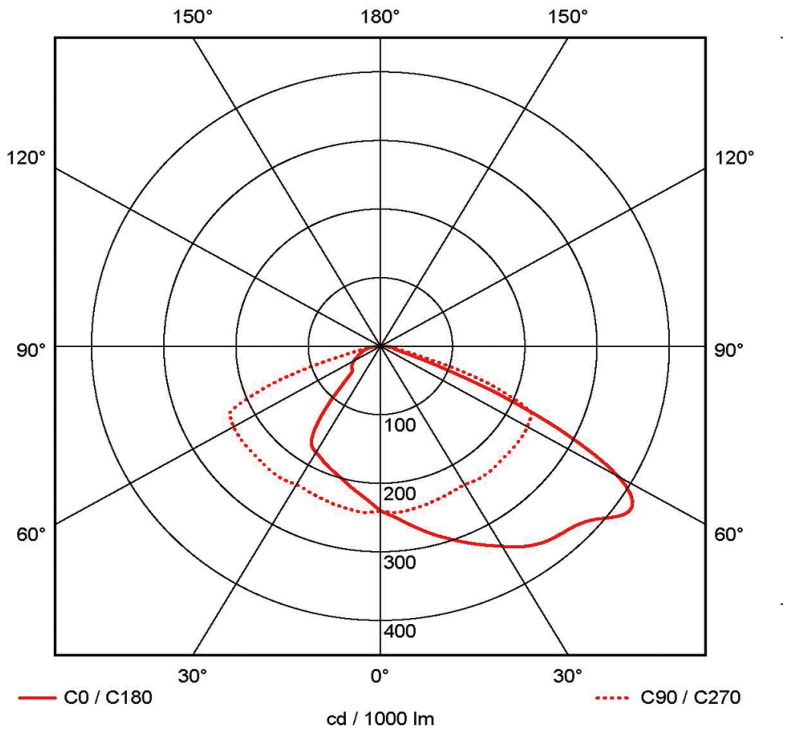

Dimensions

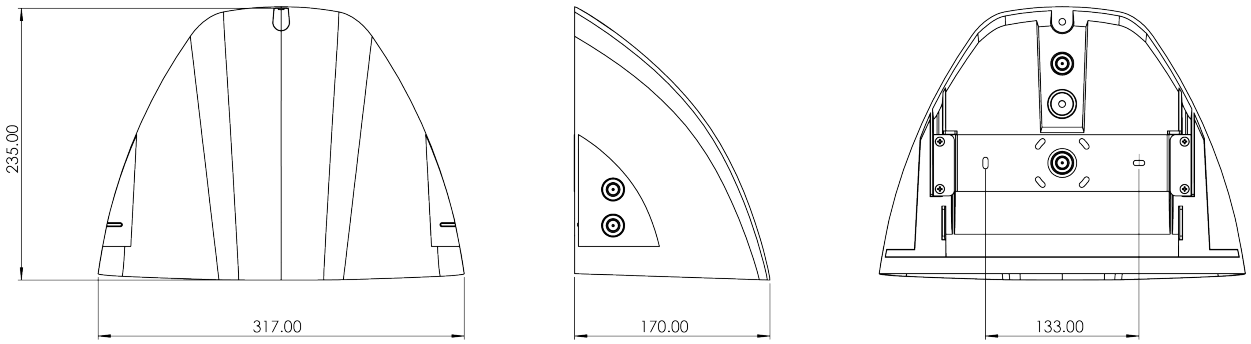

Tamlite Technical
Stafford Park 12
Telford, Shropshire,
TF3 3BJ

T: +44 (0)1952 292441
E: technical@tamlite.co.uk
W: www.tamlite.co.uk