

Temperature and Co2 Sensor

Boxing in under pews to be removed (to be agreed with heritage consultant / planners)

Existing cushions on each seat

Door rehung in other direction for fire exit

Antique brass lift up flap double socket and data point on the AV circuit

Teva lamp shades replaced

Sockets under bench

Induction Loop Panel

Stacked panels  
AVB 001  
& SLB 001

Brass Stair Runner Rods  
M50.190

Exhibition Cabinet  
by exhibition  
designer


Existing sliding timber slidign  
screen to be removed and  
surround made good

Existing standing lamps with  
new shades (see lighting  
schedule for further  
information)

Renovation of existing pews

N10.110  
Loquer to Pews  
M60.160

Ground Floor Synagogue Plan

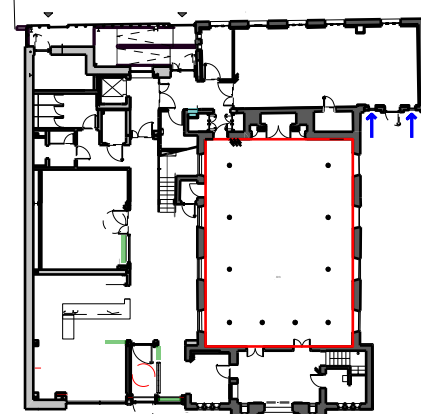

#### SYNAGOGUE FINISHES KEY

##### WALLS:

- Decorative paintwork as per Hirst spec
- General paintwork to walls Farrow & Ball
- Plaster repair to damp/cracked solid walls
- Plaster repair to lath and plaster ceiling

• See structural spec for crack repairs timber truss repairs and dry rot repairs

##### SOFFITS:

- Point eggshell Farrow & Ball

##### FURNITURE:

- Restoration sanding & paint to pews
- Restoration & specialist paintwork to columns & ark

#### SMALL POWER

- Unswitched Socket Outlet (g: no. of gangs)
- Switched Socket Outlet (g: no. of gangs)
- Switched Fuse Spur Outlet
- Unswitched Fuse Spur Outlet
- Unswitched Single Socket Outlet (Cleaners Socket)
- Wireless Access Point
- Floor boxes (power only)

Listed areas to have cables chased in unless noted otherwise

All wall sockets 450mm from FFL unless stated otherwise  
For setting out see room elevations

ALL EXISTING DIMS TO BE CHECKED ON SITE BEFORE ORDERING ANY MATERIALS

#### DO NOT SCALE FROM THIS DRAWING

THE CONTRACTOR IS TO CHECK AND VERIFY ALL BUILDING AND SITE DIMENSIONS, LEVELS AND SEWER INVERT LEVELS AT CONNECTION POINTS BEFORE WORK STARTS

THIS DRAWING IS TO BE READ AND CHECKED IN CONJUNCTION WITH ENGINEERS AND OTHER SPECIALIST DRAWINGS

THE DRAWING AND THE WORKS DEPICTED ARE THE COPYRIGHT OF THIS PRACTICE AND MAY NOT BE REPRODUCED EXCEPT BY WRITTEN PERMISSION

DRAWINGS TO BE USED FOR COSTING PURPOSES ONLY

DESIGNS SUBJECT TO DISCHARGE OF PLANNING CONDITIONS AND BUILDING CONTROL APPROVAL

CONTRACTOR TO ALLOW ADEQUATE TIME FOR STATUTORY SIGN-OFF PROCESS FOR ALL SAMPLES REQUESTED

| Rev: | Date:    | Description          |
|------|----------|----------------------|
| G    | 29.01.21 | AV Sockets Added     |
| F    | 12.01.21 | AV Amendments        |
| E    | 07.08.20 | Pews Sockets         |
| D    | 15.07.20 | ME Engineer comments |
| C    | 14.07.20 | Pews update          |
| B    | 29.06.20 | Pews update          |
| A    | 26.05.20 | General Revision     |

Job: 1603 Jewish Museum  
Client: Manchester Jewish Museum

Drawing: Synagogue Plan Ground Floor  
Drawing no: 1603-5-350 - 0  
Scale: 1:50 @A3

citizensdesignbureau  
Citizens Design Bureau, Unit 01 & 03, 6 Westgate Street, E83RN  
t : 0203 095 9732  
e : everyone@citizensdesignbureau.net

6 Synagogue Bench number