



KIT-60PT3ZH5 (S-6071PT3E + U-60PZH3E5)

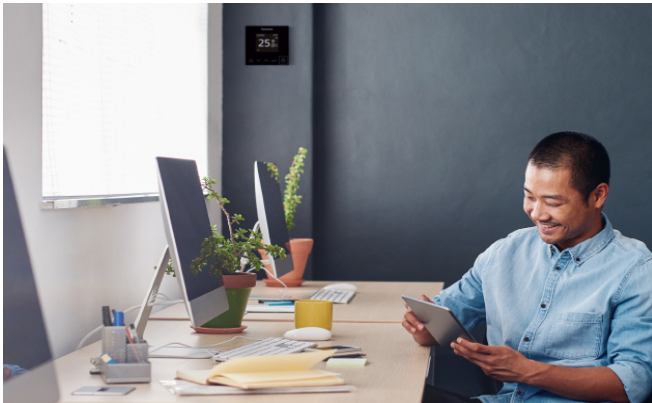

New wired remote controller

CONEX with IoT integration. Not only detailed operation and maintenance settings are possible with the smartphone or tablet, but also service and diagnostic functions.

[FIND OUT MORE](#)

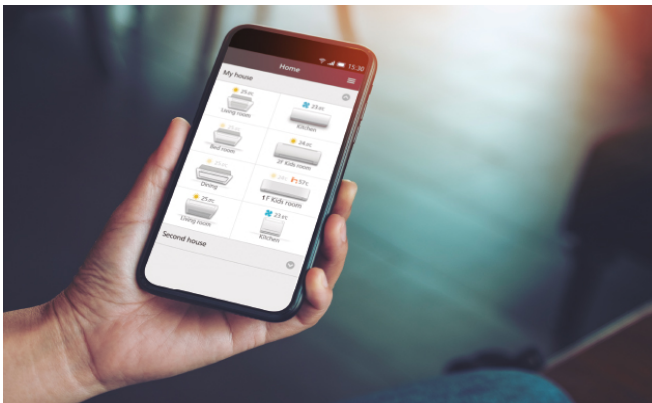

Commercial WLAN Adaptor

Panasonic CZ-CAPWFC1 interface adaptor, allows connection of one or a group of indoor units to Panasonic Comfort Cloud App, which provides control, monitoring, scheduling and error alerts.

[FIND OUT MORE](#)



PACi NX Series

NX Series with R32 refrigerant has been developed to meet the demand for easy refurbishment with the 3 wired method.

Also integrated with IoT solutions and includes nanoe[®] X function as standard.

[FIND OUT MORE](#)



Bringing nature's balance indoors

nanoe? X, technology with the benefits of hydroxyl radicals.

Abundant in nature, hydroxyl radicals (OH radicals) have the capacity to inhibit pollutants, certain viruses, and bacteria to clean and deodorise.

nanoe? X technology can bring these incredible benefits indoors so that hard surfaces, soft furnishings, and the indoor environment can be a cleaner and pleasant place to be, whether at home, at work, or visiting hotels, shops, restaurants etc.

[FIND OUT MORE](#)

PACi NX Series Elite ceiling Inverter+ - R32		
6.0 kW		
Kit		KIT-60PT3ZH5
Remote controller		CZ-RTC5B
Cooling capacity (Nominal)	kW	6,0
Cooling capacity (Min)	kW	1,2
Cooling capacity (Max)	kW	7,1
EER (Nominal) (1)	W/W	3,82
SEER/ηsc (2)	%	7,5 A++
Pdesign (cooling)	kW	6,0
Input power cooling (Nominal)	kW	1,57
Annual energy consumption cooling (3)	kWh/a	280
Heating capacity (Nominal)	kW	7,0
Heating capacity (Min)	kW	1,2
Heating capacity (Max)	kW	8,0
COP (Nominal) (1)	W/W	4,14
SCOP/ηsc (2)	%	4,8 A++
Pdesign at -10°C	kW	4,6
Input power heating (Nominal)	kW	1,69
Annual energy consumption heating (3)	kWh/a	1342
Indoor unit		S-6071PT3E
Indoor air flow (Hi)	m³/min	20,0
Indoor air flow (Med)	m³/min	17,0
Indoor air flow (Lo)	m³/min	14,5
Moisture removal volume	L/h	2,1
Indoor sound pressure (Med) (4)	dB(A)	34
Indoor sound pressure (Lo) (4)	dB(A)	29
Indoor sound power (Hi)	dB(A)	56

PACi NX Series Elite ceiling Inverter+ - R32		
		6.0 kW
Indoor sound power (Med)	dB(A)	52
Indoor sound power (Lo)	dB(A)	47
Indoor dimension (Height)	mm	235
Indoor dimension (Width)	mm	1.275
Indoor dimension (Depth)	mm	690
Indoor net weight	kg	34
nanoe X Generator		Mark 2
Outdoor unit		U-60PZH3E5
Outdoor power source	V	220 - 230 - 240
Current in cooling (1p 220V / 3p 380)	A	7,35
Current in cooling (1p 230V / 3p 400)	A	7,05
Current in cooling (1p 240V / 3p 415)	A	6,75
Current in heating (1p 220V / 3p 380)	A	7,85
Current in heating (1p 230V / 3p 400)	A	7,50
Current in heating (1p 240V / 3p 415)	A	7,20
Outdoor air flow (Cool)	m³/min	42,0
Outdoor air flow (Heat)	m³/min	42,0
Outdoor sound pressure (Cool -Hi)	dB(A)	47
Outdoor sound pressure (Heat -Hi)	dB(A)	50
Outdoor sound power (Cool -Hi)	dB(A)	65
Outdoor sound power (Heat -Hi)	dB(A)	69
Outdoor dimension (Height)	mm	695
Outdoor dimension (Width)	mm	875

PACi NX Series Elite ceiling Inverter+ - R32		6.0 kW
Outdoor dimension (Depth)	mm	320
Outdoor net weight	kg	43
Pipe diameter (Liquid)	Inch (mm)	1/4 (6,35) (5)
Pipe diameter (Gas)	Inch (mm)	1/2 (12,70) (6)
Pipe length range	m	3 ~ 40
Elevation difference (in/out) (7)	m	15 / 30 (8)
Pipe length for additional gas	m	30
Additional gas amount	g/m	15
Refrigerant (R32) / CO2 Eq.	kg / T	1,15 / 0,78
Operating range (Cool - Min)	°C	-15
Operating range (Cool - Max)	°C	+46
Operating range (Heat - Min)	°C	-20
Operating range (Heat - Max)	°C	+24

Complementary products

