
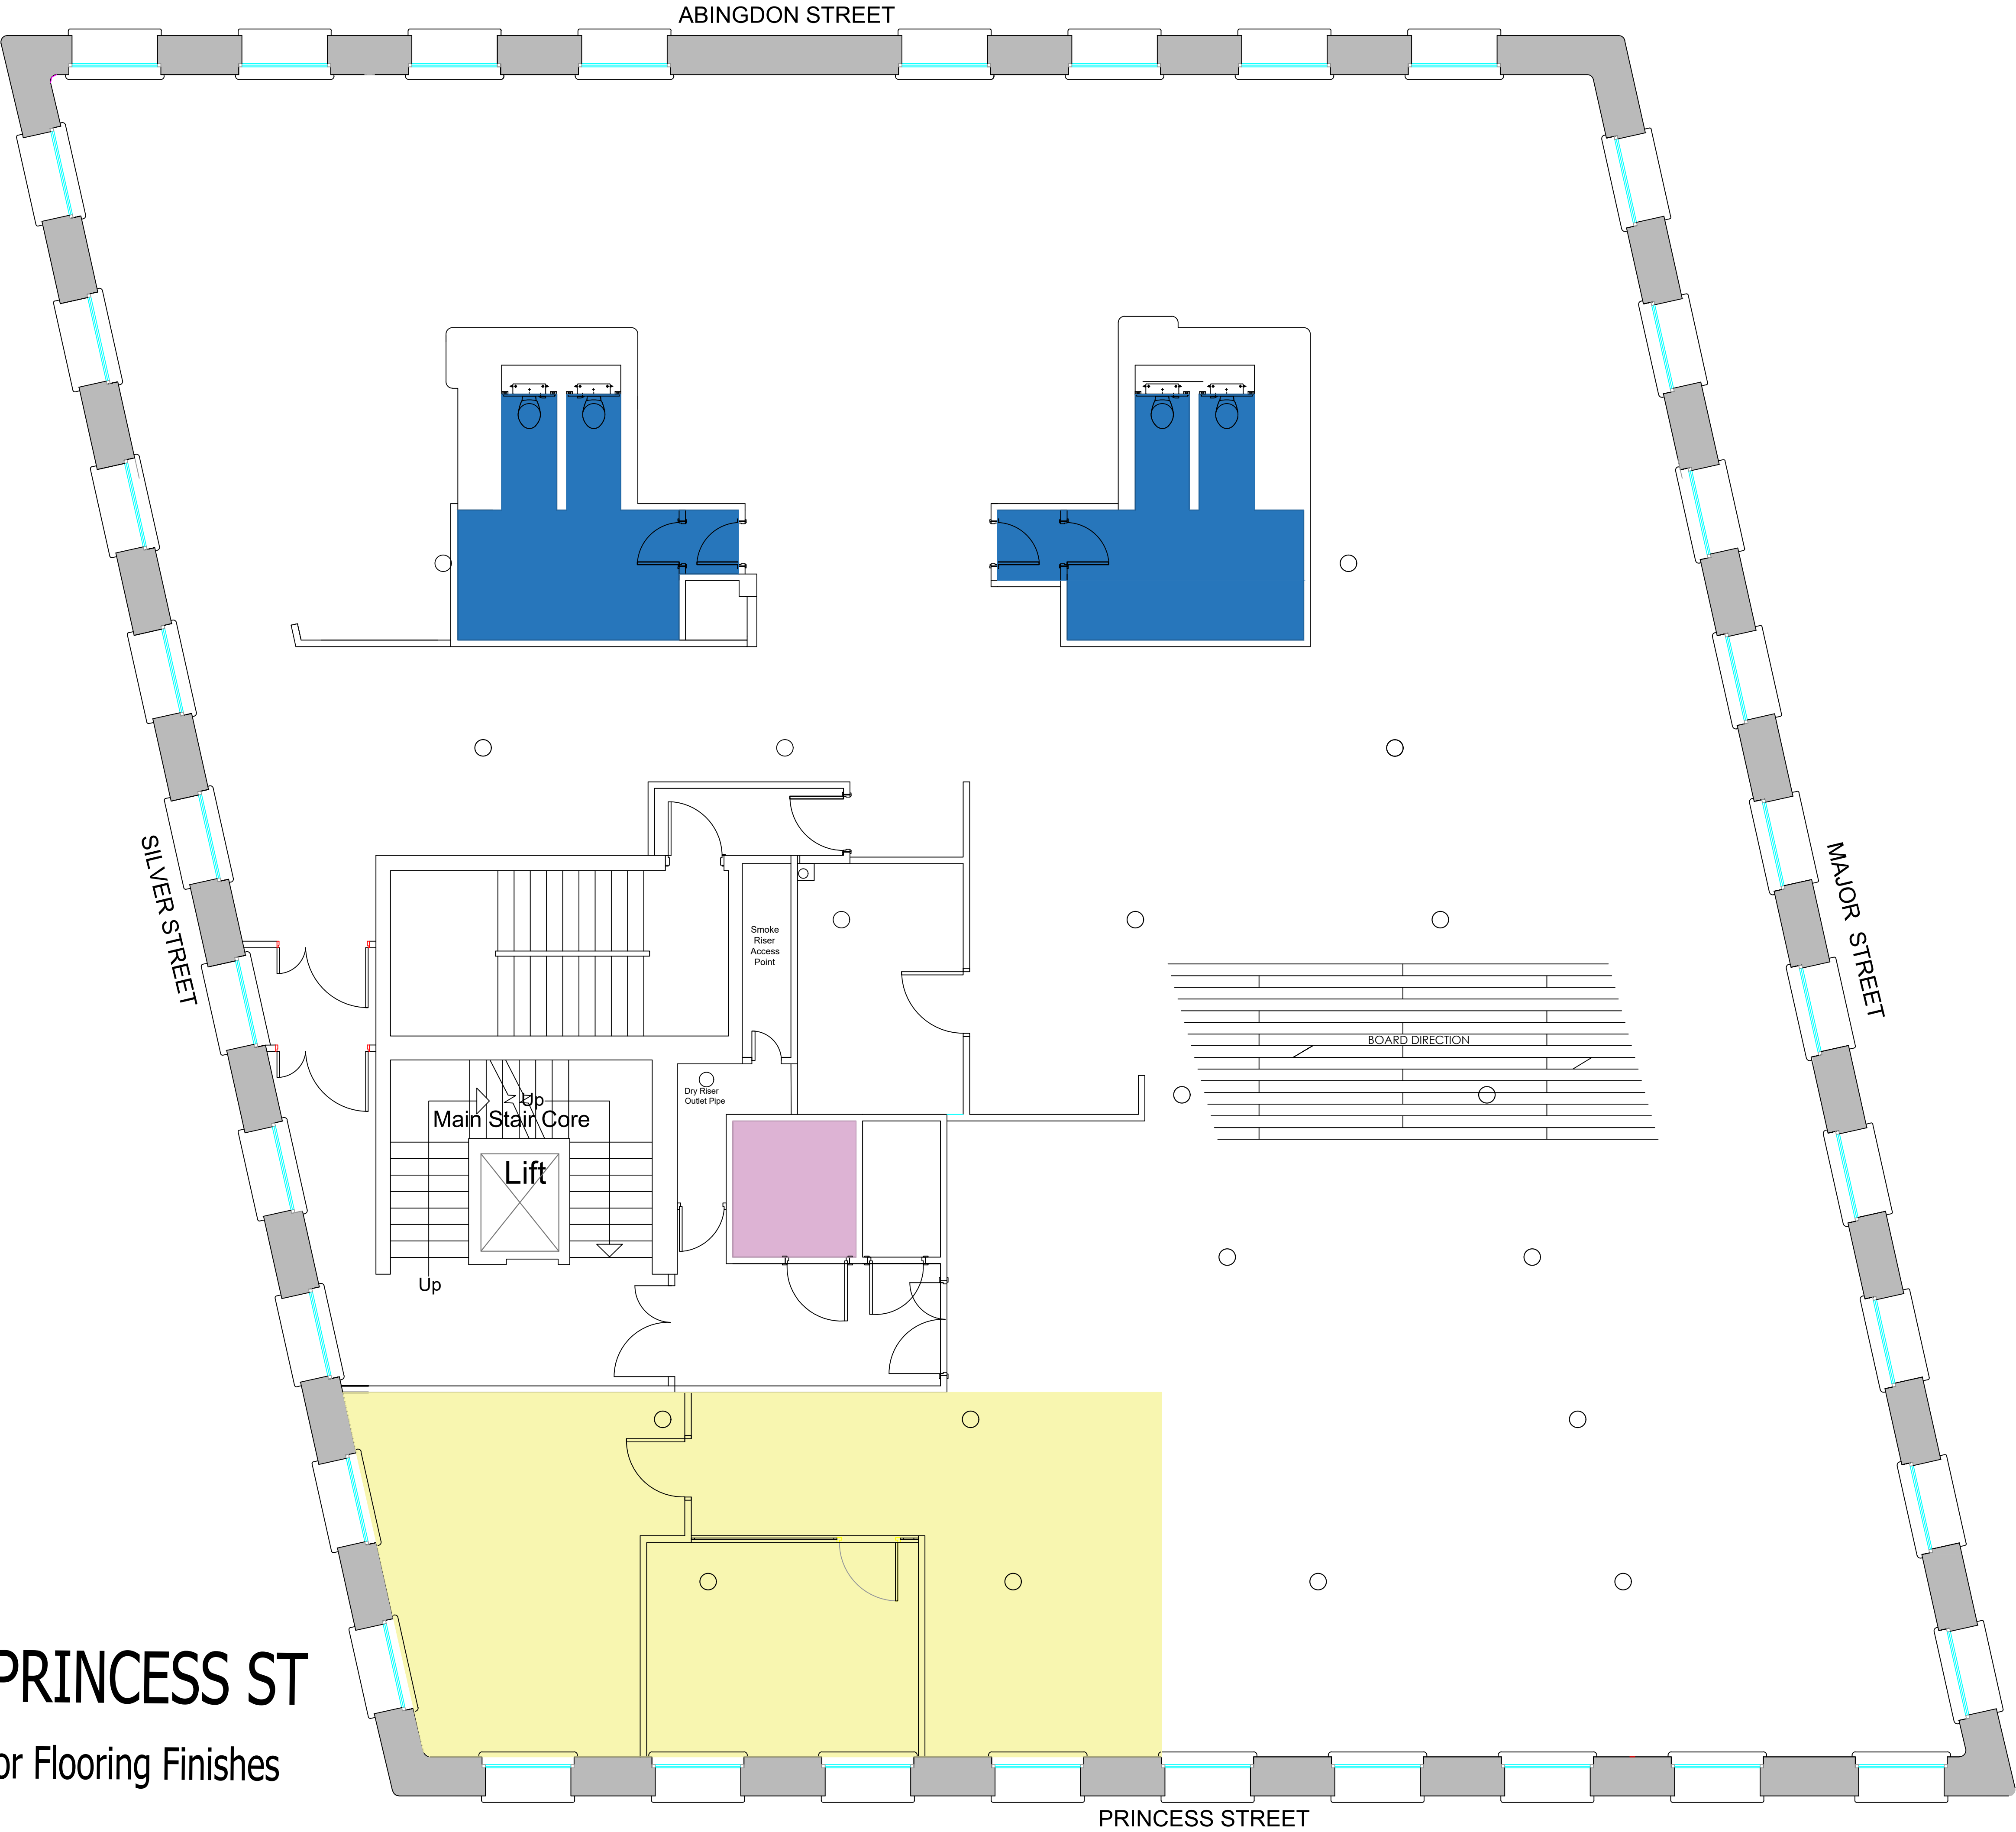


101 PRINCESS ST

4th Floor Flooring Finishes

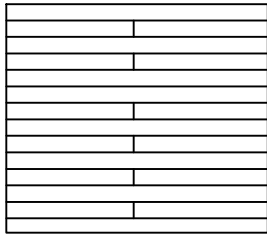

FLOORING SPEC AND NOTES

	GENERAL OFFICE AREA TIMBER FLOORBOARDS TO BE RETAINED. FLOOR TO BE SANDED BACK AND RE-FINISHED TO CONSISTENT FINISH THROUGHOUT. TO BE FINISHED WITH 2no COATS OF LACQUER TO 20% SHEEN. FLOOR SOCKETS TO BE REMOVED FOR SANDING/ REFURBISHMENT AND RE-INSTATED AROUND COLUMNS AS SHOWN. [POSITIONS TO BE CONFIRMED ON SITE]
	MEETING ROOM AREA CARPET TILE: Manufacturer: Desso Range: AIRMASTER Colour: TBC
	WASHROOM AREAS CERAMIC TILE: Range: Econciote Colour: GRIGIO 600 X 600 FOR USE IN WASHROOM AREAS GROUT : MAPEI 113 CEMENT GREY SKIRTING : TO MATCH FLOOR TILE 90 X 600. TO BE LAID IN LINE WITH FLOOR TILE.
	DISABLED WC / SHOWER CERAMIC TILE: Range: Econciote Colour: GRIGIO GRIP 600 X 600 FOR USE IN WETROOM AREAS GROUT : MAPEI 113 CEMENT GREY SKIRTING : TO MATCH FLOOR TILE 90 X 600. TO BE LAID IN LINE WITH FLOOR TILE.

CLIENT				
ABERDEEN STANDARD INVESTMENTS				
JOB TITLE				
101 PRINCESS ST				
DRAWING TITLE				
4TH FLOOR FLOORING FINISHES				
REV	JOB NUMBER	DRAWING NUMBER	SCALE	DATE
A	R2419	FBI-R2419-A4009	NTS	08.03.21
GC				



Flexible Business Interiors, The Old Coach House, 820 Wilmslow Rd,
Didsbury, Manchester
M20 2RN
tel: 0161 445 1661 fax: 0161 445 1771 email: enquire@flexiblebusinessinteriors.co.uk

Information on this drawing is copyright, all rights reserved. No part of this work may be reproduced or transmitted in any form by any means, either electronically, mechanically, by photocopying, recording or otherwise stored in any retrieval system of any nature, without the express consent of Flexible Business Interiors Ltd.