
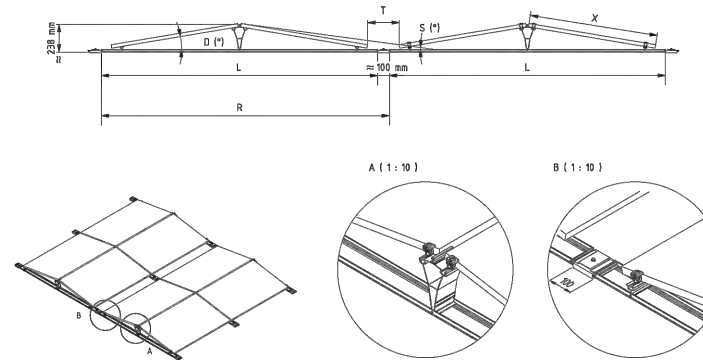
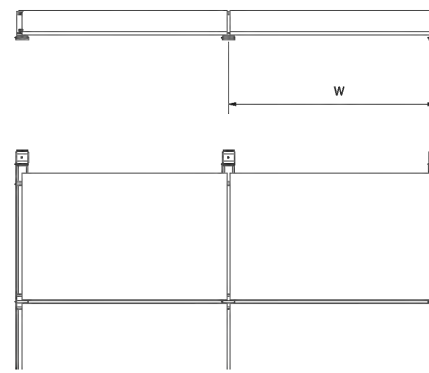


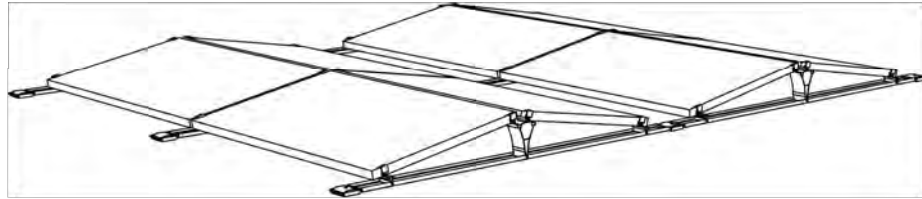

System Datasheet

FS10-EW / FS10-EW XL

General	
System	Ballasted PV-mounting system
Content	Ground rails, rail connector, building protection mat, low post, high post, clamps
System warranty	10 years
Application area	Flat roof on industrial, agricultural (except hydrogen sulfide exposition) and residential buildings
Roof covering	Bitumen, concrete, foil, gravel
Roof slope	max. 5° without additional measures

System properties	
System orientation	East-West
Module tilt	10°
System weight approx.	1,15 kg/m²plus ballast (project specific)
Weight PV-module included approx.:	11,8 kg/m²plus ballast (project specific)
Friction coefficient	$\mu = 0,5$ is to be determined and ensured upon installation surface.
Material	Aluminum, stainless steel, rubber granulate
Minimum edge distance	0,6 m
Max. Wind Dynamic Pressure	$q_p = 1,5 \text{ kN/m}^2$ (with simultaneously acting snow load of $s_k = 1,5 \text{ kN/m}^2$)
Max. Wind Dynamic Pressure	$q_p = 1,0 \text{ kN/m}^2$ (with simultaneously acting snow load of $s_k = 2,5 \text{ kN/m}^2$)

Modules	
Type	Suitable for standard 60/72 cell panels. Approval for panel corner clamping is to be obtained.
Module width:	FS10-EW: 950-1.052 mm / FS10-EW XL: 1053-1.168 mm
Module guidance	Horizontal/Landscape

Certifications	
Wind loads	Determined in wind tunnel tests by Ruscheweyh Consult GmbH
PV layout	Provided by Renusol (www.pv-configurator.com)
Ballast plan	Provided by Renusol (www.pv-configurator.com)

Services	
PV layout	Provided by Renusol (www.pv-configurator.com)
Ballast plan	Provided by Renusol (www.pv-configurator.com)

System		FS10-EW XL	
Ground rail		R500499	
Rail length	L:	2362 mm	
Row spacing	R:	2462 mm	
Module width	X ₁ :	Min: 1053 mm	
	X ₂ :	Max: 1168 mm	
Passageway	T(X ₁):	Min: 355 mm	
	T(X ₂):	Max: 125 mm	
System width	W:	Module length +24mm	
Module inclination	D:	9°	
Shading angle	S:	≈ 7,0° - 9,0°	

System		FS10-EW	
Ground rail		R500500	
Rail length	L:	2260 mm	
Row spacing	R:	2360 mm	
Module width	X ₁ :	Min: 950 mm	
	X ₂ :	Max: 1052 mm	
Passageway	T(X ₁):	Min: 455 mm	
	T(X ₂):	Max: 255 mm	
System width	W:	Module length +24mm	
Module inclination	D:	10°	
Shading angle	S:	≈ 6,7° - 7,9°	

System		FS10-EW	
Ground rail		R500407	
Rail length	L:	2060 mm	
Row spacing	R:	2160 mm	
Module width	X ₁ :	Min: 950 mm	
	X ₂ :	Max: 1052 mm	
Passageway	T(X ₁):	Min: 255 mm	
	T(X ₂):	Max: 55 mm	
System width	W:	Module length +24mm	
Module inclination	D:	10°	
Shading angle	S:	≈ 7,8° - 9,3°	

System		FS10-EW	
Ground rail		R500501	
Rail length	L:	1989 mm	
Row spacing	R:	2090 mm	
Module width	X ₁ :	Min: 950 mm	
	X ₂ :	Max: 1020 mm	
Passageway	T(X ₁):	Min: 185 mm	
	T(X ₂):	Max: 45 mm	
System width	W:	Module length +24mm	
Module inclination	D:	10°	
Shading angle	S:	≈ 9,0° - 9,5°	

FS10-EW 09 | 2021
EN | Renusol System Datasheet
Misprints and errors, technical or other changes and changes in the availability of products are expressively reserved

2/2

C6 SPECTRUM
BUSINESS ESTATE
ANTHONY'S WAY,
ROCHESTER, KENT
ME2 4NP

PRO.DATE 11/09/2023

DESIGN BY DR

CHECKED BY JD

PROJECT NAME

DOWNLEY DRIVE

SHEET NAME

SPECIFICATION
SHEET

SHEET SIZE

ANSI B
279 X 432

SHEET NUMBER

D.02