
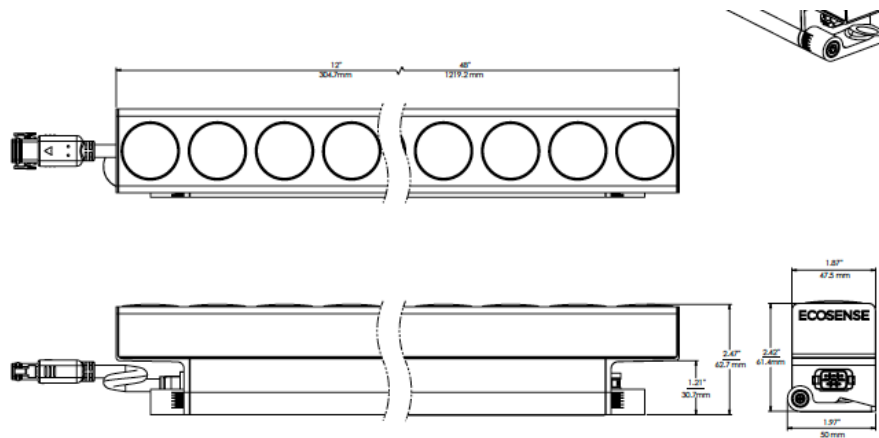


L60I4818RGB415X15

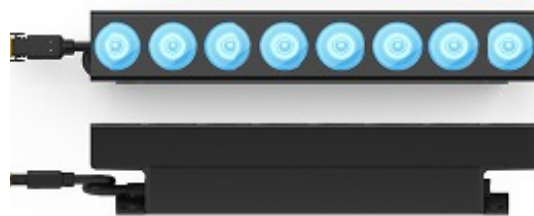

TROV L60 RGBW delivers 10 beams for grazing, asymmetric, and washing in a slim form factor for colour changing facade lighting application. With VividSync™ and colour mixing optics, L60 Linear provides uniform colour mixing with minimal mixing distance and setbacks.

Features:

- RGBW quad chips and colour mixing optics provide uniform color mixing with minimal setbacks

Channel Max™ directs all driver output to the LEDs in use.

VividSync™ ensures consistent output for every 12in section.

5 power levels

Friction hinge allows infinite aiming from 0°-180°

Aiming indicators for precise aiming



IP66 exterior rated

finishes: Black

Power 18 watt per 305mm

Optic 15 x 15 degrees

TYPE C 63S20VD.1RGBW27L16B7050

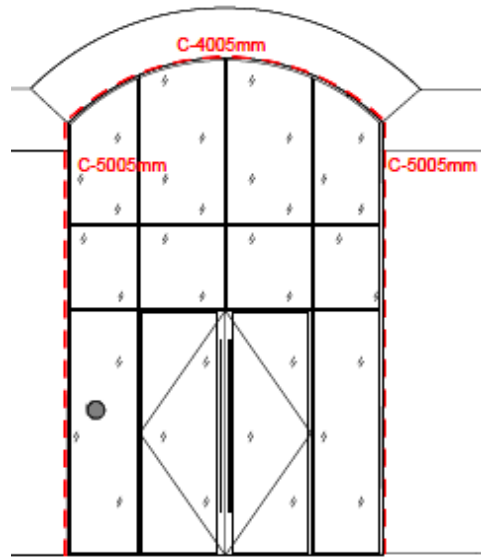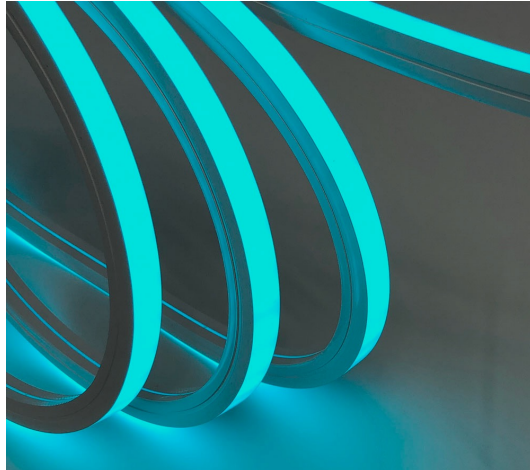

Driver 24VDC (Constant Voltage)
Material Silicone
Minimum Bend Diameter Ø300mm
IP Rating IP67
Protection UV, flame, salt and chlorine resistant
Bending Plane Vertical Domed
Jacket Colour White
LED CRI/CCT RGBW (2700K)
LED Type 16W/m (60LEDs/m 10m max.)
Cable Entry Bottom
IP Rating IP67
Cable Length 5m
Length Refer to drawing
LED Cut Point 100mm
Casambi control

