Tamlite Lighting
Data Sheet

Order Code: CPH100T5WWB

CITY PATH CPH Black 10W - T5 360° Area Optic - Fixed Output - 3000K



Features

- Suitable for pathways and pedestrian areas
- TM66 Score: 2.4 (Definite/Substantial progress to circularity)
- Built for exterior, fit-and-forget installations
- IP65 rating for exterior use
- Ground mounted
- CRI: Ra>80
- Available in grey (RAL9006) or black (RAL9005)
- Up to 100 lumens per Watt efficacy

Construction

- Die-cast aluminium body
- Polycarbonate lens
- Integral driver simplifying installation
- Stainless steel fixing screws

To Specify

CITY PATH CPH Black 10W - T5 360° Area Optic - Fixed Output - 3000K as per Tamlite CITY PATH T5 range.

Technical Data

General

Luminaire Wattage (W)	10
Weight (kg)	6.13
Operating Temperature (°C)	-20 to 25

Light Output

Lumens (lm)	1000
Efficacy (lm/W)	100

Life

L90 Lifetime (HRS)	47041
L80 Lifetime (HRS)	94000
L70 Lifetime (HRS)	96000

Electrical

Rated Input Current (A)	46
Power Factor (pf)	0.95
Input Voltage Range (VAC)	220-240
Inrush Current Peak (A)	10
Surge Protection (kV)	1
Total Harmonic Distortion (THD)	25
Output LF Ripple	Â±5%
Conductor Size (mm)	1.5 to 2.5
Terminal Type	3-POLE PIANO

LED

CCT (K)	3000
CRI	>80
Macadam Elipses	4

Driver


Driver Current (mA)	350
Forward Voltage (V)	22

Tamlite Technical
Stafford Park 12
Telford, Shropshire,
TF3 3BJ

T: +44 (0)1952 292441
E: technical@tamlite.co.uk
W: www.tamlite.co.uk


Tamlite Lighting
Data Sheet

Photometrics

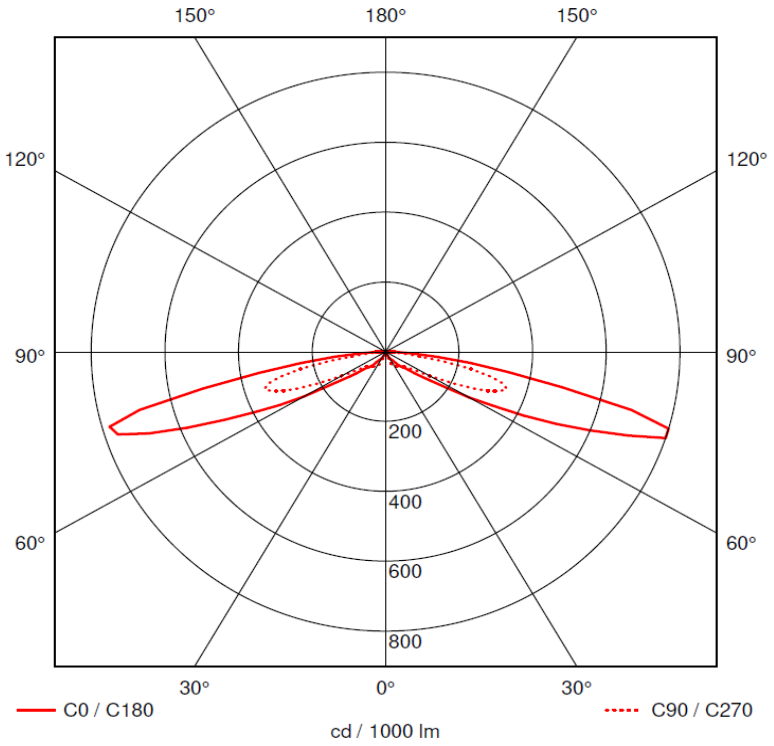

	C0	C90	C180
0°	0	0	0
5°	0	0	0
10°	0	2	0
15°	2	5	2
20°	4	18	4
25°	11	41	11
30°	22	48	21
35°	28	51	28
40°	40	56	40
45°	61	61	62
50°	81	68	79
55°	135	86	132
60°	262	139	256
65°	463	234	435
70°	701	331	685
75°	758	317	749
80°	339	159	349
85°	106	31	102
90°	4	0	3
	cd / 1000 lm		

Dimensions

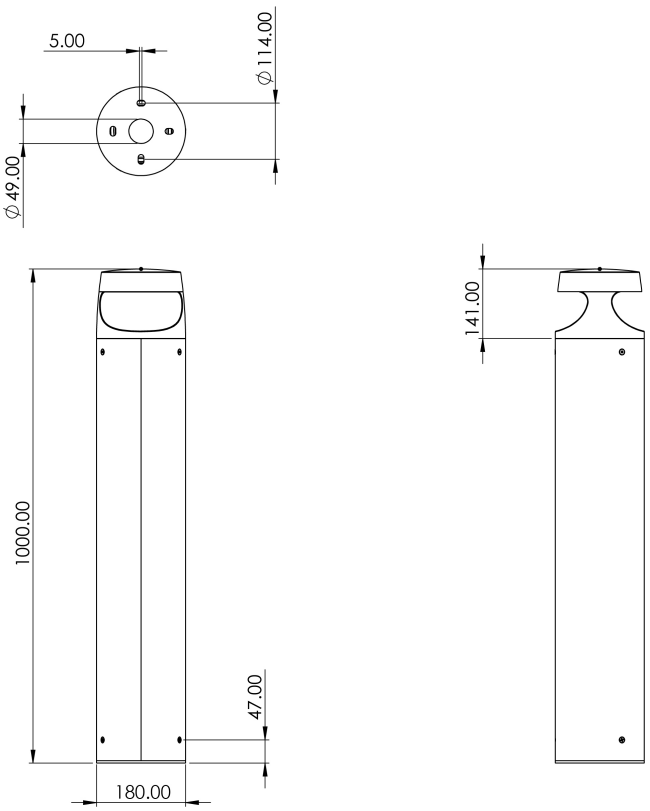

Tamlite Technical
Stafford Park 12
Telford, Shropshire,
TF3 3BJ

T: +44 (0)1952 292441
E: technical@tamlite.co.uk
W: www.tamlite.co.uk

Generated on: 10/07/2025 2:05pm
Produced by Tamlite Lighting