

Textured Flags

Stylish granular surface.

Textured Flags have a modern and natural look that blends beautifully with a variety of other products. Manufactured with a hard-wearing granular surface, these flags are both stylish and hard-wearing.

- Superb hard-wearing textured surface
- Vibrant long-lasting colours
- Natural appearance

 **PrimeTop®**  **Ef-Stop®**



Textured

Finish



Permeable

Also available as



Steps



Pedestrian
Use



Light
Traffic




Commercial
Traffic



BIM
Level 2


Refer to relevant guidance in BS 7533



600 x 600mm



450 x 450mm



400 x 400mm

Sizes




35mm
40mm
50mm
65mm

Depths



Textured Flags

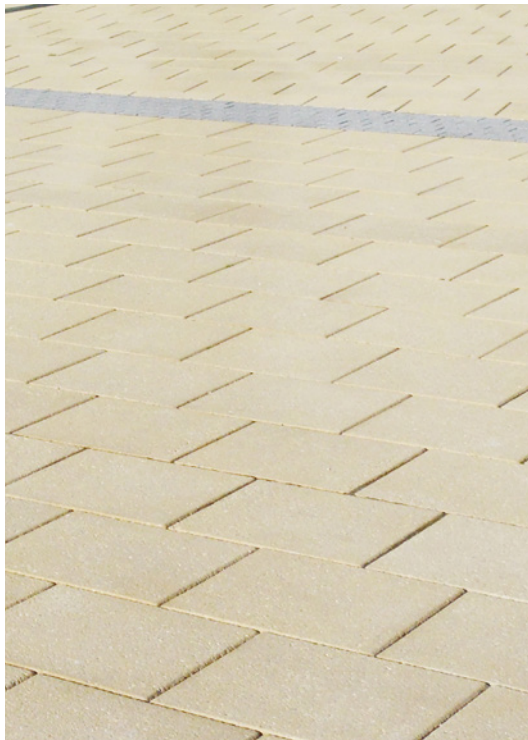

Specification

 **PrimeTop®**  **Ef-Stop®**

Product type	Concrete Paving Flag
Manufactured to	BS EN 1339:2003
Surface Layer	Hard-wearing surface layer with a minimum of 4mm and >390kgs/m ³ cement
Efflorescence	Minimum 12 hour vapour curing to significantly reduce the possibility of efflorescence
Strength	Less than 50mm deep Typical tensile splitting strength of >3.5MPa 50mm or greater Typical tensile splitting strength of >5MPa (Class 3)
Slip/Skid risk	Extremely Low
Installed to	BS 7533-4:2006
NS	Plus Q25 315 Create 45-20-64/395
Applications	Refer to the relevant part of BS 7533 for the correct sub-base design and the most suitable product size for your application. Available from www.bsigroup.com
Energy used	100% renewable energy
Water used	100% from our rainwater harvesting system and groundwater bore hole
Recycled content	Not less than 5%
Carbon Footprint	600x600x50mm 22kgCo ² e/m ² 600x600x40mm 16kgCo ² e/m ² 450x450x50mm 22kgCo ² e/m ² 450x450x35mm 15kgCo ² e/m ² (Buff: 16kgCo ² e/m ²) 400x400x65mm 28kgCo ² e/m ² 400x400x50mm 22kgCo ² e/m ² 400x400x40mm 19kgCo ² e/m ²
Recyclable	100% of this product can be recycled
Manufacturing & Delivery	From one location within the UK
breeam rating www.bre.co.uk	A , according to the Green Guide to Specification, 4 th Edition 2009. A+ , can be achieved by using a recycled sub-base.

Tobermore products are manufactured in accordance with an accredited ISO 9001:2015 Quality Management. Manufacturing facilities are accredited to ISO14001:2015 Environmental Management. The company publish environmental labels and declarations in accordance with BES 6001.

Contact Us

GB: 0844 800 5736
NI: 028 7964 2411
ROI: 048 7964 2411

Email

technical@tobermore.co.uk
sales@tobermore.co.uk

tobermore.co.uk

Textured Flags




Stock


product	size (mm)	finish	edge	colours available	in stock	no. per m ²	no. per pack	no. per pallet	weight kg per pack GB	weight kg per pack NI/ROI
Textured Flags BIM	600 x 600 x 50	Textured	Chamfered	Buff, Charcoal, Natural	YES	2.78	20	20	850	842
	600 x 600 x 40	Textured	Chamfered	Buff, Charcoal, Golden, Natural	YES	2.78	24	24	848	840
	450 x 450 x 50	Textured	Chamfered	Buff, Charcoal, Natural	YES	4.94	20	80	474	470
	450 x 450 x 35	Textured	Chamfered	Buff, Charcoal, Natural	YES	4.94	30	120	521	517
	400 x 400 x 65	Textured	Chamfered	Natural	YES	6.25	16	64	400	398
	400 x 400 x 50	Textured	Chamfered	Buff, Charcoal, Natural	YES	6.25	20	80	397	394
	400 x 400 x 40	Textured	Chamfered	Buff, Charcoal, Golden, Natural	YES	6.25	25	100	403	400

BIM - This product is available to download from our website in BIM Level 2 format.

Natural

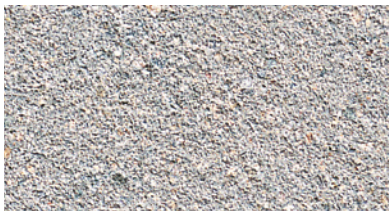

Charcoal

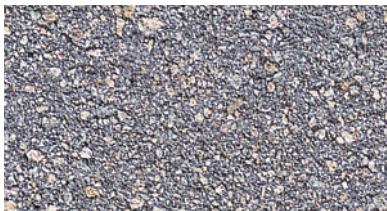

Buff



Golden



Contact Us

GB: 0844 800 5736
NI: 028 7964 2411
ROI: 048 7964 2411

Email

technical@tobermore.co.uk
sales@tobermore.co.uk

tobermore.co.uk