




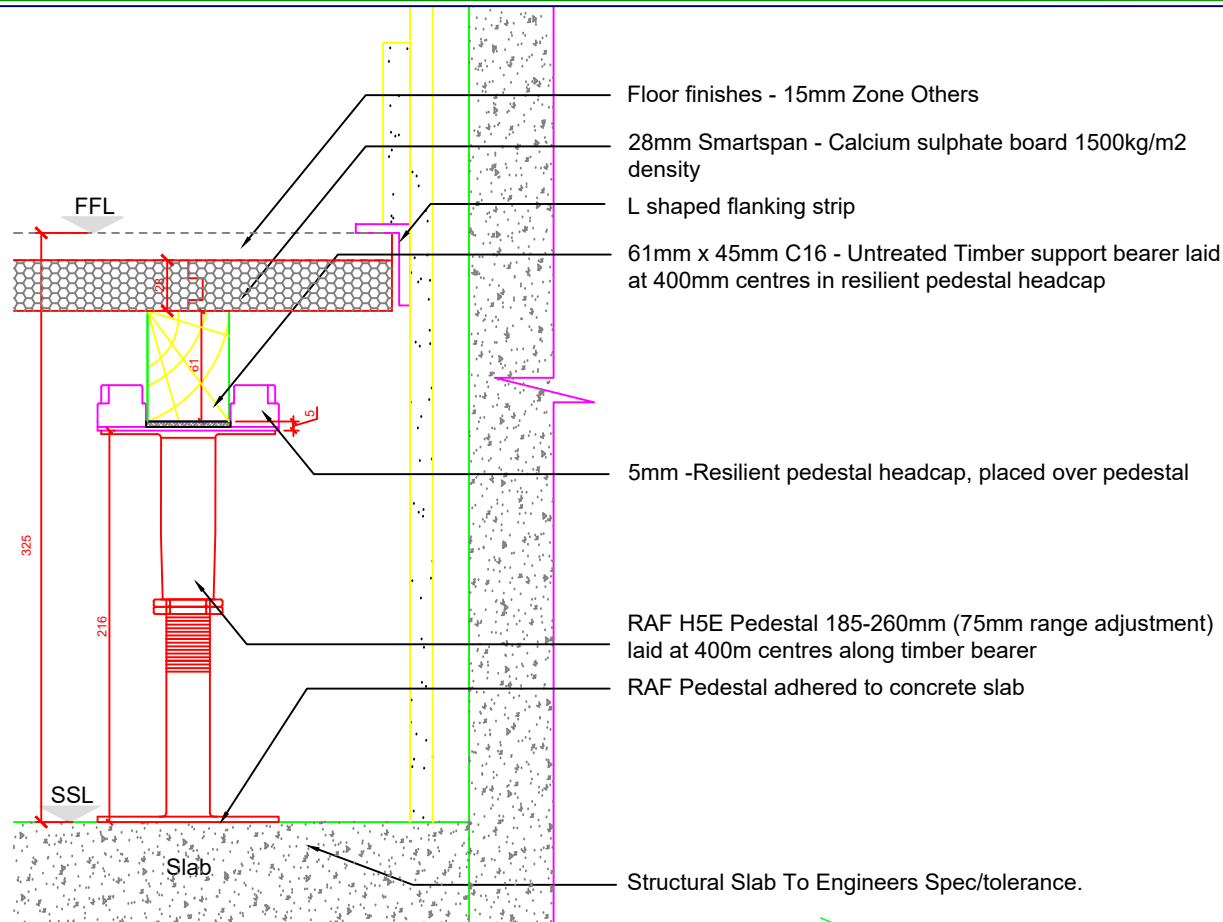

DANSKIN ACOUSTIC FLOOR DETAIL -Lounge/Circulation Area

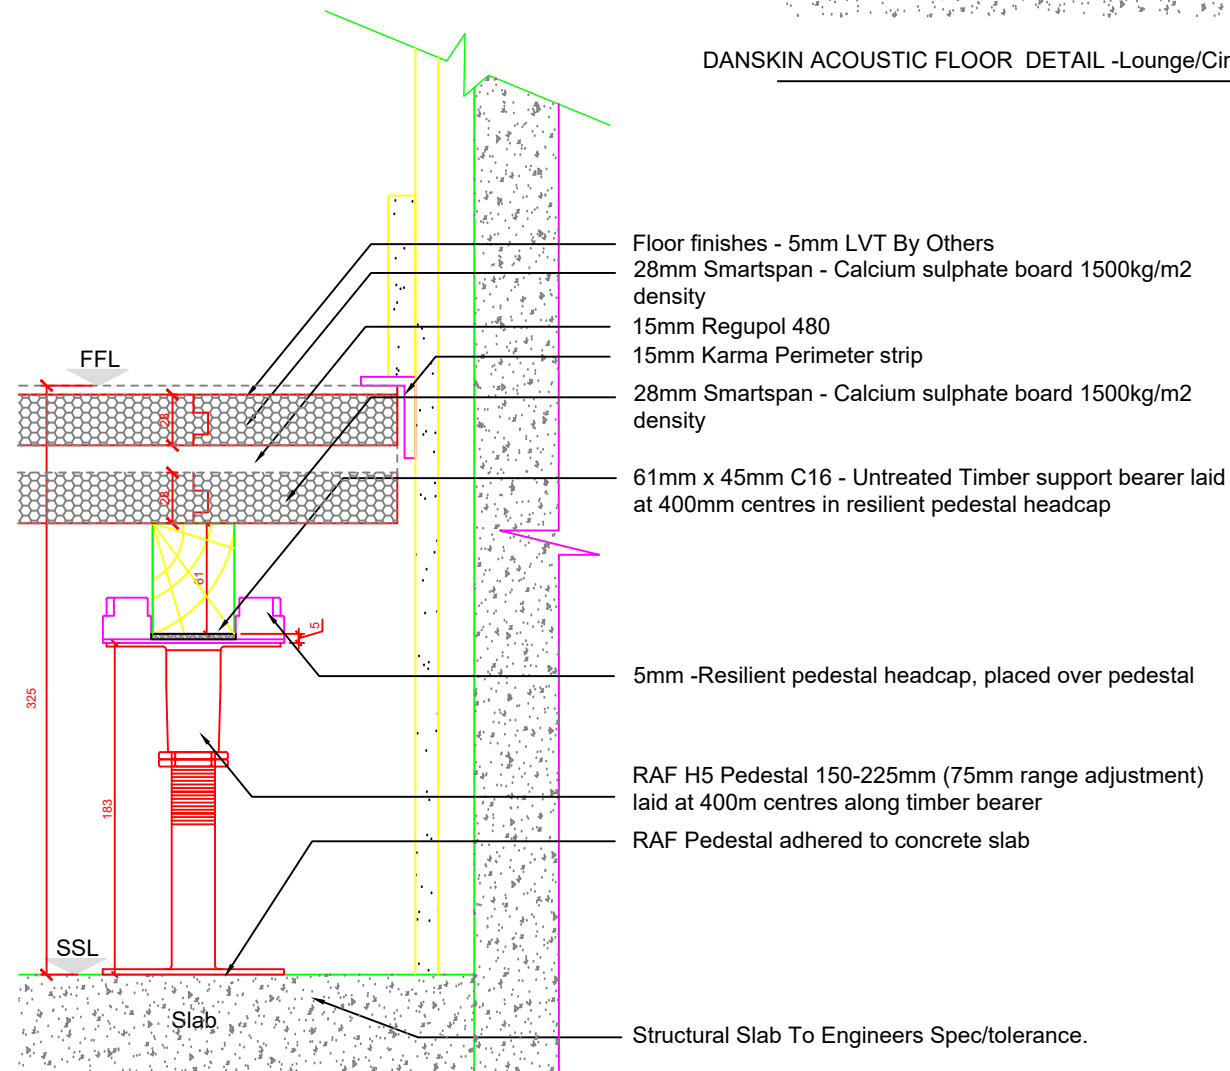

DANSKIN ACOUSTIC FLOOR DETAIL -Studio Area

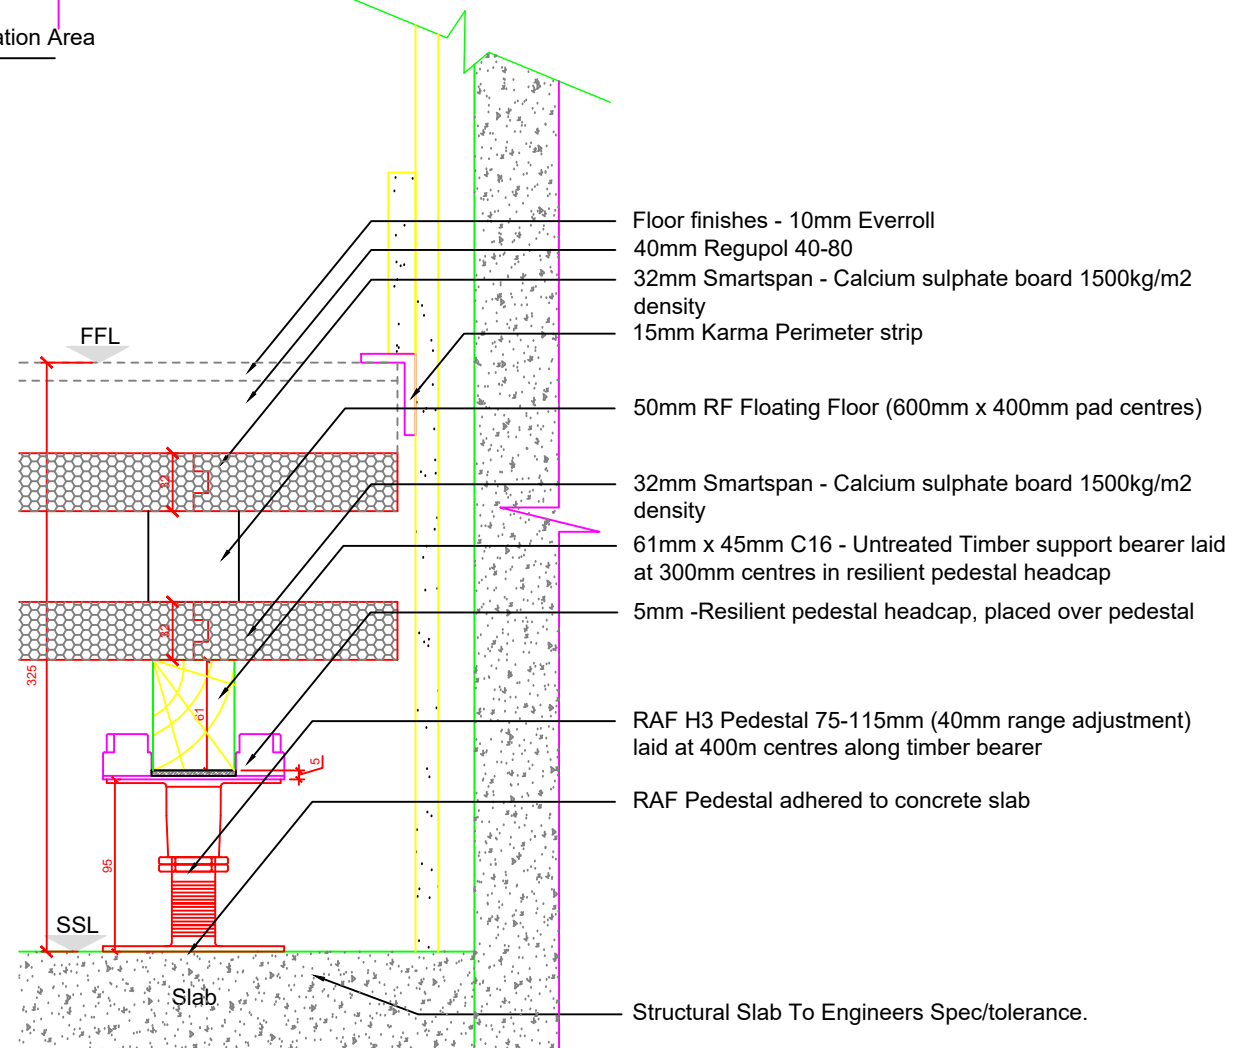

DANSKIN ACOUSTIC FLOOR DETAIL- Gym Area

- NOTES: AREA - XXXXXX
- Installation Requirements**
1. Prior to the timber floor installation, the building must be watertight, the floor should be swept and clear of all other trades and materials.
 2. All battens should be laid flat within the cradles supports and packers used to achieve required datum floor height.
 3. Batten ends are to be fully supported within a cradle, where joints occur, these are to be placed centrally within the cradle.
 4. where joints occur within batten runs, these are to be staggered across the floor. The same applies to the floor deck (Chipboard or Smartspan) to ensure correctly supported floor system.
- Electrical Conduits, Pipes**
5. Unless shown or indicated it is otherwise assumed that the floor is level, free from any conduits, pipes etc fixed to its surface, and no allowance has been made to incorporate any such items
- Further Notes**
6. It remains the responsibility of the contractor to check materials and details provided to ensure correct site installation. CMS Danskin take no responsibility, as details are provided for product guidance only.

00	FOR APPROVAL -	MIN	05/08/20
REV	DESCRIPTION	BY	DATE

CMSDANSKIN
ACOUSTICS

1 Netherton Road
Wishaw
ML2 0EQ

1 : +44 (0)1698 356 000
f : +44 (0)1698 372 222
e : info@cmsdanskin.co.uk

Scotland
Warrington
Cambridge

www.cmsdanskin.co.uk

PROJECT TITLE		
Combrook- Manchester		
DESCRIPTION	SCALE	SIZE
325mm Pedestal Detail	1:4	A1
DRAWING No	REVISION	
14287-Typical Section	P	
The Content of this drawing is copyright of CMS- DANSKIN LTD		
QUOTE No 14287	DRAWN BY- MN	