

Artin.

Creative Lighting Design

Architectural


L2

Description	Recessed LED module luminaire
Fixing Type	Recessed
Finish	Black
Attachments / Spec	48 degree beam
Colour Temperature	2700K
Colour Rendering Index	>90
Light Source	LED
Dimming Protocol	DALI
Wattage	13 w
Lumen Output	850 lm
Lumens per Watt	65 lm/w
IP Rating	20
Notes	Include for all drivers, connections and fixing details necessary for complete working installation
Manufacturer	Lucent Lighting
Reference	Fine Line System – Line 5LED Cube
Contact	Alex Hay E: Alex@lucent-lighting.com T: (0) 7971663060

Artin.



Product Image

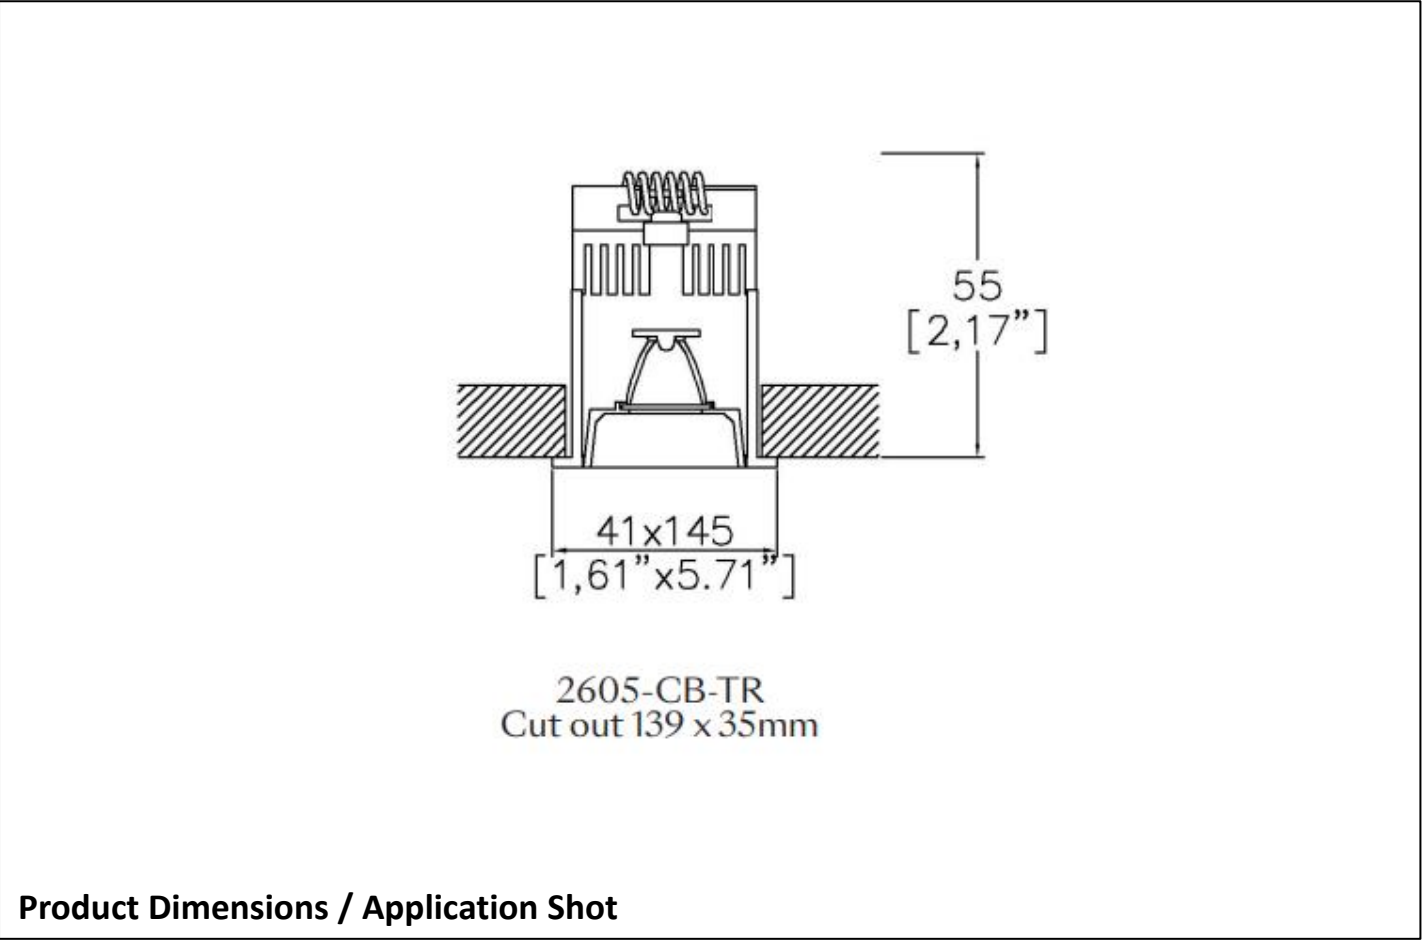

Product Dimensions / Application Shot

L3-(N,M,W)

Description	Adjustable LED downlight with inset LED light source
Fixing Type	Ceiling Recessed
Finish	Black
Attachments / Spec	Glare Louvre
Colour Temperature	2700K
Colour Rendering Index	>90
Light Source	LED
Dimming Protocol	DALI
Wattage	13.6 w
Lumen Output	1086 lm
Lumens per Watt	80 lm/w
IP Rating	20
Notes	Include for all drivers, connections and fixing details necessary for complete working installation
Manufacturer	Lucent Lighting
Reference	Soft70 Accent Trim
Contact	Alex Hay E: Alex@lucent-lighting.com T: (0) 7971663060


Artin.

MANUFACTURER / CONTRACTOR NOTES

‘N’ Denotes 15 degree optic
‘M’ Denotes 24 degree optic
‘W’ Denotes 36 degree optic



Product Image

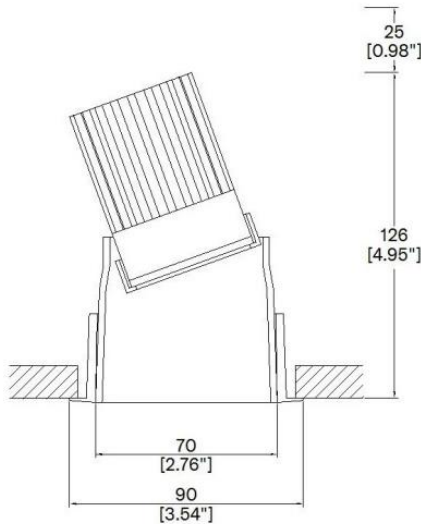

073-LED-TR
Cut-out 79mm Ø

Product Dimensions / Application Shot

L4-(N,M,W)

Description	Fixed LED downlight with inset LED light source
Fixing Type	Ceiling Recessed
Finish	Black
Attachments / Spec	Glare Louvre
Colour Temperature	2700K
Colour Rendering Index	>90
Light Source	LED
Dimming Protocol	DALI
Wattage	7.4 w
Lumen Output	505 lm
Lumens per Watt	67 lm/w
IP Rating	20
Notes	Include for all drivers, connections and fixing details necessary for complete working installation
Manufacturer	Lucent Lighting
Reference	Soft50 Fixed Trim
Contact	Alex Hay E: Alex@lucent-lighting.com T: (0) 7971663060


Artin.

MANUFACTURER / CONTRACTOR NOTES

‘N’ Denotes 15 degree optic
‘M’ Denotes 24 degree optic
‘W’ Denotes 36 degree optic



Product Image

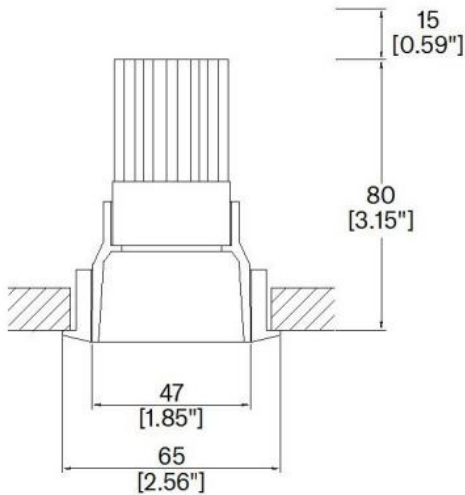

050-LED-TR
Cut-out 61mm Ø

Product Dimensions / Application Shot

L4IP-(N,M,W)

Description	Fixed LED downlight with inset LED light source
Fixing Type	Ceiling Recessed
Finish	Black
Attachments / Spec	Glare Louvre
Colour Temperature	2700K
Colour Rendering Index	>90
Light Source	LED
Dimming Protocol	DALI
Wattage	7.4 w
Lumen Output	505 lm
Lumens per Watt	67 lm/w
IP Rating	44
Notes	Include for all drivers, connections and fixing details necessary for complete working installation
Manufacturer	Lucent Lighting
Reference	Soft50 Fixed Trim
Contact	Alex Hay E: Alex@lucent-lighting.com T: (0) 7971663060


Artin.

MANUFACTURER / CONTRACTOR NOTES

‘N’ Denotes 15 degree optic
‘M’ Denotes 24 degree optic
‘W’ Denotes 36 degree optic



Product Image

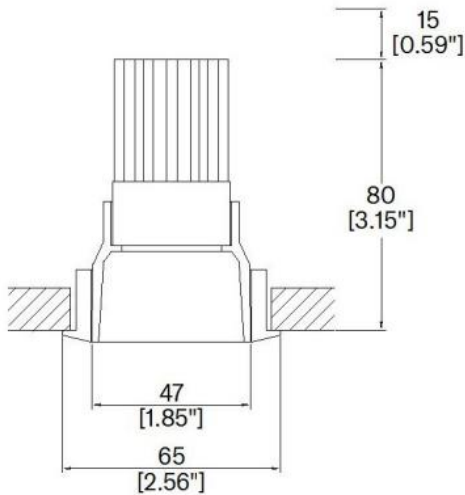


050-LED-TR
Cut-out 61mm Ø

Product Dimensions / Application Shot

L5


Description	Flexible LED profile with homogenous lighting effect
Fixing Type	Recessed into joinery details
Finish	NA
Attachments / Spec	Fixing channel as required Main Contractor to confirm preferred cable entry position and exact linear lengths onsite before ordering equipment
Colour Temperature	2700K
Colour Rendering Index	>90
Light Source	LED
Dimming Protocol	DALI
Wattage	12 w/m
Lumen Output	580 lm/m
Lumens per Watt	48 lm/w
IP Rating	67
Notes	Include for all drivers, connections and fixing details necessary for complete working installation
Manufacturer	Tryka
Reference	Continuity S – Made to measure
Contact	Colin Gawne E: Colin.Gawne@tryka.com T: 07890110951

Artin.

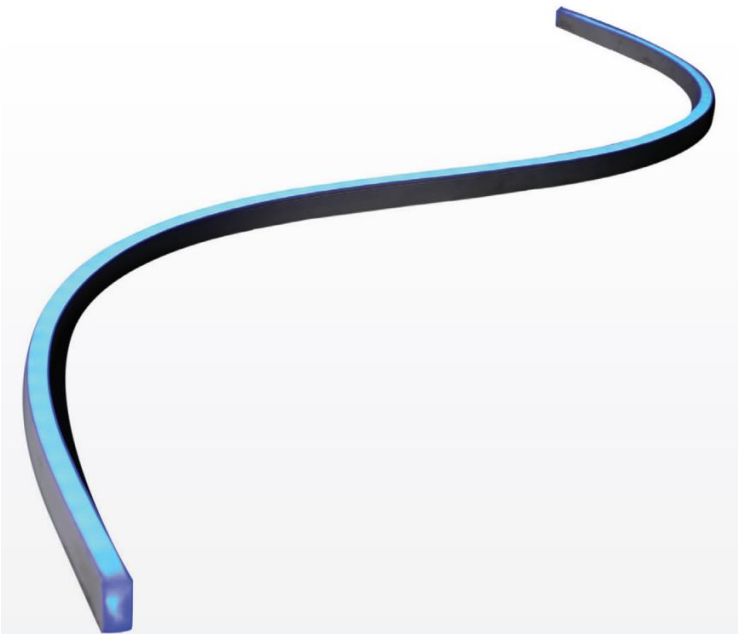


Product Image

Molded Cable Entry Options


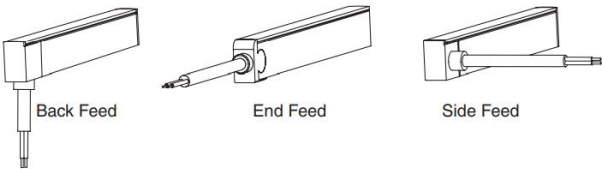


Bending Direction



CONTINUITY S can be bent sideways

Cross Section with extrusion



Product Dimensions / Application Shot

L6

Description	Low profile LED unit with opal diffuser
Fixing Type	Recessed flush into joinery rebate detail
Finish	NA
Attachments / Spec	Aluminum channel Opal diffuser
Colour Temperature	2700K
Colour Rendering Index	>90
Light Source	LED
Dimming Protocol	DALI
Wattage	14.5w/m
Lumen Output	1275 lm/m
Lumens per Watt	87 lm/w
IP Rating	20
Notes	Include for all drivers, connections and fixing details necessary for complete working installation
Manufacturer	Tryka
Reference	Adder 180 LED
Contact	Colin Gawne E: Colin.Gawne@tryka.com T: 07890110951

Artin.

PRO004
Standard Surface Mount
Aluminium Profile




TRY-FLEX-MK-PRO004-AP-YY


Opal Cover
TRY-FLEX-MK-PRO004-OC-YY

Clear Cover
TRY-FLEX-MK-PRO004-CC-YY

End Cap Set
TRY-FLEX-MK-PRO004-EC-SET

Fixing Clip - Pair
TRY-FLEX-MK-PRO004-FC-PAIR

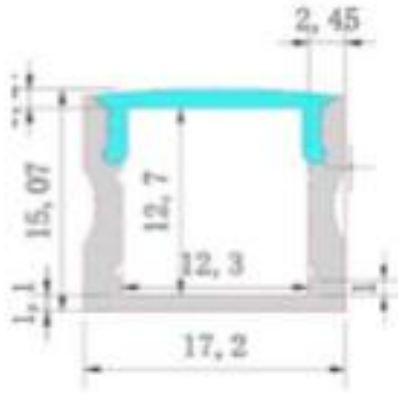



Product Image

Product Dimensions / Application Shot

L6IP


Description	Low profile LED unit with opal diffuser
Fixing Type	Recessed flush into joinery rebate detail
Finish	NA
Attachments / Spec	Aluminum channel Opal diffuser
Colour Temperature	2700K
Colour Rendering Index	>90
Light Source	LED
Dimming Protocol	DALI
Wattage	14.5w/m
Lumen Output	1275 lm/m
Lumens per Watt	87 lm/w
IP Rating	47
Notes	Include for all drivers, connections and fixing details necessary for complete working installation
Manufacturer	Tryka
Reference	Adder 180 LED
Contact	Colin Gawne E: Colin.Gawne@tryka.com T: 07890110951


Artin.

PRO004
Standard Surface Mount
Aluminium Profile



TRY-FLEX-MK-PRO004-AP-YY
Opal Cover
TRY-FLEX-MK-PRO004-OC-YY
Clear Cover
TRY-FLEX-MK-PRO004-CC-YY
End Cap Set
TRY-FLEX-MK-PRO004-EC-SET
Fixing Clip - Pair
TRY-FLEX-MK-PRO004-FC-PAIR

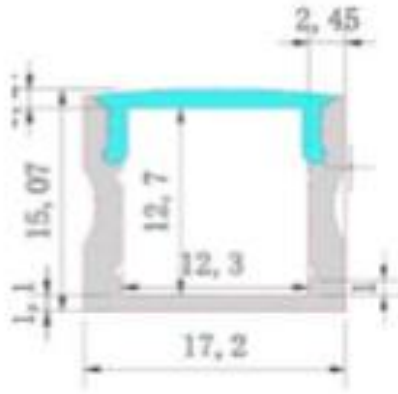



Product Image

Product Dimensions / Application Shot

L7

Description	Low profile LED unit with opal diffuser
Fixing Type	Recessed into joinery detail
Finish	NA
Attachments / Spec	Aluminum channel Opal diffuser
Colour Temperature	2700K
Colour Rendering Index	>90
Light Source	LED
Dimming Protocol	DALI
Wattage	14.5w/m
Lumen Output	1275 lm/m
Lumens per Watt	87 lm/w
IP Rating	20
Notes	Include for all drivers, connections and fixing details necessary for complete working installation
Manufacturer	Tryka
Reference	Adder 180 LED
Contact	Colin Gawne E: Colin.Gawne@tryka.com T: 07890110951

Artin.

PRO002S
Micro Surface Mount
Aluminium Profile




TRY-FLEX-MK-PRO002S-AP-YY


Opal Cover
TRY-FLEX-MK-PRO002S-OC-YY

Clear Cover
TRY-FLEX-MK-PRO002S-CC-YY

End Cap Set
TRY-FLEX-MK-PRO002S-EC-SET

Fixing Clip - Pair
TRY-FLEX-MK-PRO002S-FC-PAIR





Product Image



L8-(N,M,W,F)

Description	Fixed recessed LED downlight with deep recess light source
Fixing Type	Recessed
Finish	TBC
Attachments / Spec	Glare Louvre
Colour Temperature	2700K
Colour Rendering Index	>90
Light Source	LED
Dimming Protocol	DALI
Wattage	13.6 w
Lumen Output	907 lm
Lumens per Watt	67 lm/w
IP Rating	20
Notes	Include for all drivers, connections and fixing details necessary for complete working installation
Manufacturer	Lucent Lighting
Reference	MiniTRIM Fixed
Contact	Alex Hay E: Alex@lucent-lighting.com T: (0) 7971663060


Artin.

MANUFACTURER / CONTRACTOR NOTES

‘N’ Denotes 15 degree optic
‘M’ Denotes 24 degree optic
‘W’ Denotes 36 degree optic
‘F’ Denotes 60 degree optic



Product Image

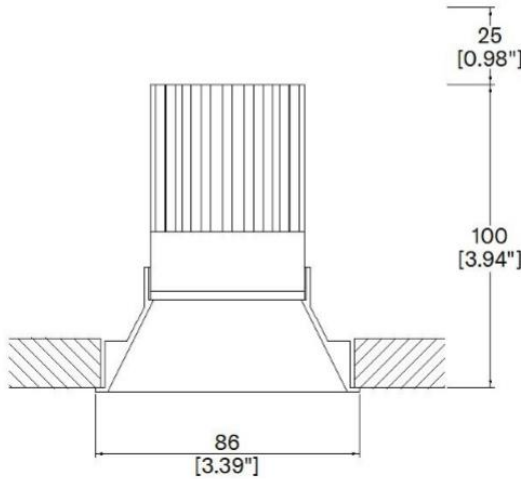

860-LED
Cut-out 81mm Ø

Product Dimensions / Application Shot

L9-(N,M,W)

Description	Adjustable LED downlight with inset LED light source
Fixing Type	Ceiling Recessed
Finish	Black
Attachments / Spec	Glare Louvre
Colour Temperature	2700K
Colour Rendering Index	>90
Light Source	LED
Dimming Protocol	DALI
Wattage	7.4 w
Lumen Output	505 lm
Lumens per Watt	67 lm/w
IP Rating	20
Notes	Include for all drivers, connections and fixing details necessary for complete working installation
Manufacturer	Lucent Lighting
Reference	Soft50 Accent Trim
Contact	Alex Hay E: Alex@lucent-lighting.com T: (0) 7971663060


Artin.

MANUFACTURER / CONTRACTOR NOTES

‘N’ Denotes 15 degree optic
‘M’ Denotes 24 degree optic
‘W’ Denotes 36 degree optic



Product Image

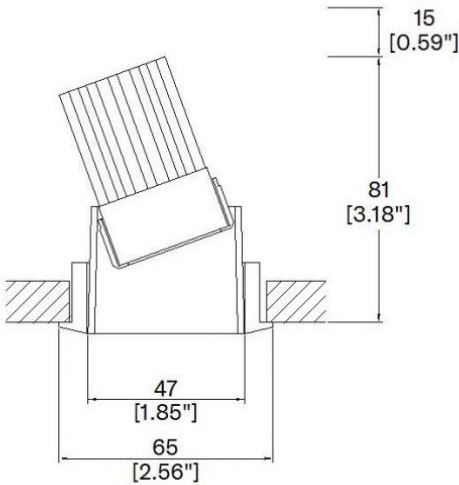

Product Dimensions / Application Shot


L11

Description	Spike mounted miniature uplight integrated into planters Various locations
Fixing Type	Spike mounted
Finish	Black
Attachments / Spec	10 degree beam Ground Spike Anti Glare Cowl
Colour Temperature	2700K
Colour Rendering Index	>93
Light Source	LED
Dimming Protocol	DALI
Wattage	7 w
Lumen Output	474 lm
Lumens per Watt	68 lm/w
IP Rating	67
Notes	Include for all drivers, connections and fixing details necessary for complete working installation
Manufacturer	Light Graphix
Reference	LD10238 – E2
Contact	Dylan Parry E: dylan@lightgraphix.biz M: 07340399180

Artin.



Product Image

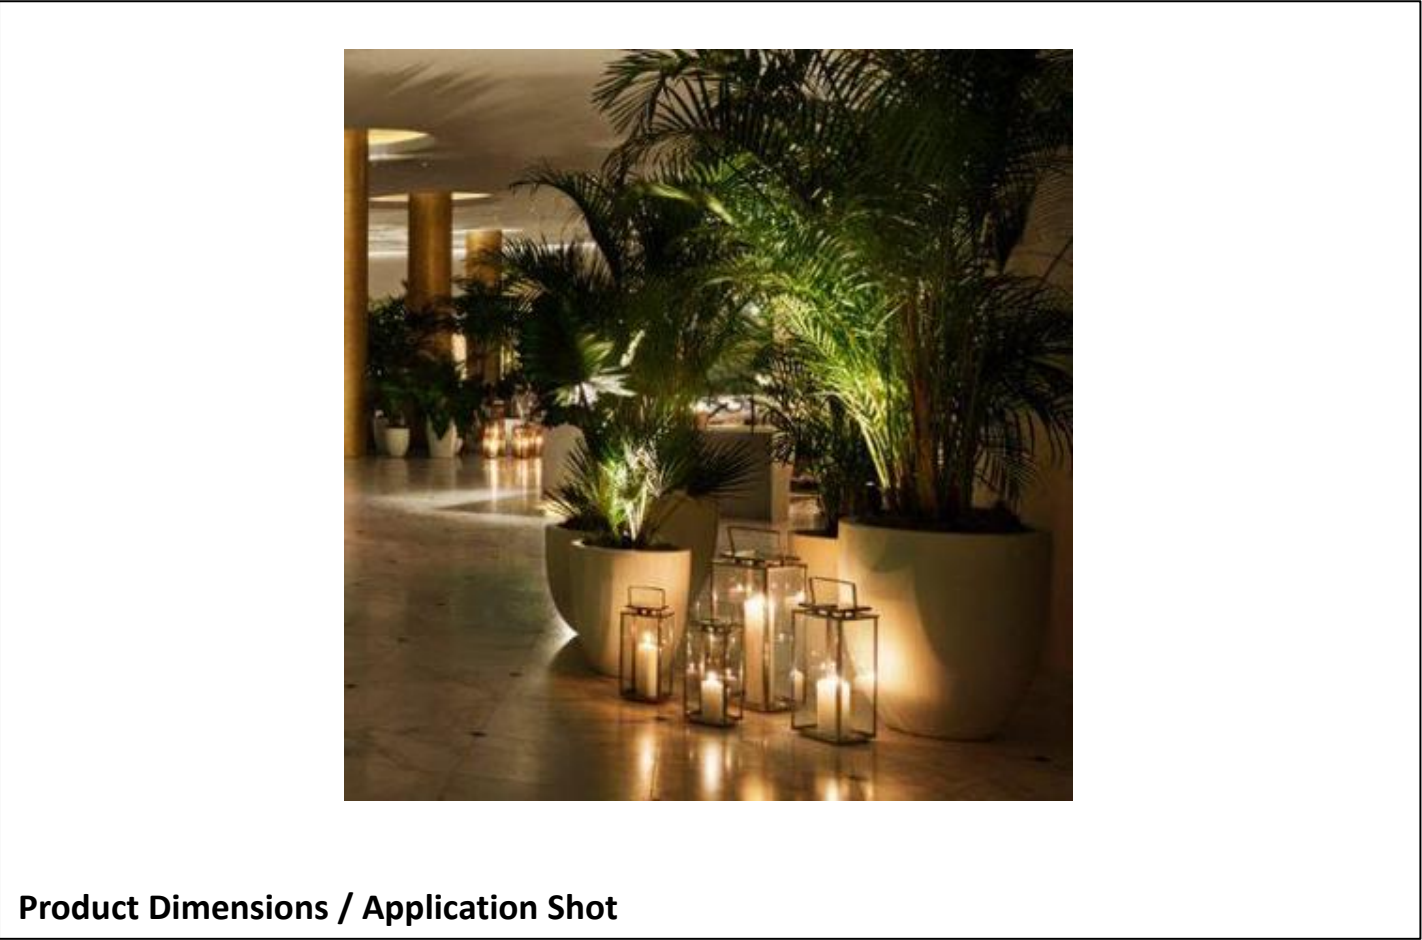

Product Dimensions / Application Shot


L12

Description	Surface mounted LED profile with opal diffuser
Fixing Type	Surface mounted – integrated into perimeter open cell ceiling detail in lift lobbies
Finish	Black
Attachments / Spec	
Colour Temperature	2700K
Colour Rendering Index	>90
Light Source	LED
Dimming Protocol	DALI
Wattage	21 w/m
Lumen Output	2861 lm/m
Lumens per Watt	136 lm/w
IP Rating	20
Notes	Include for all drivers, connections and fixing details necessary for complete working installation
Manufacturer	OptaLED
Reference	ICON 46 Surface – Allow for length as drawn
Contact	Neil Makin E: neil.makin@optaled.com T: 07908439300

Artin.



Product Image

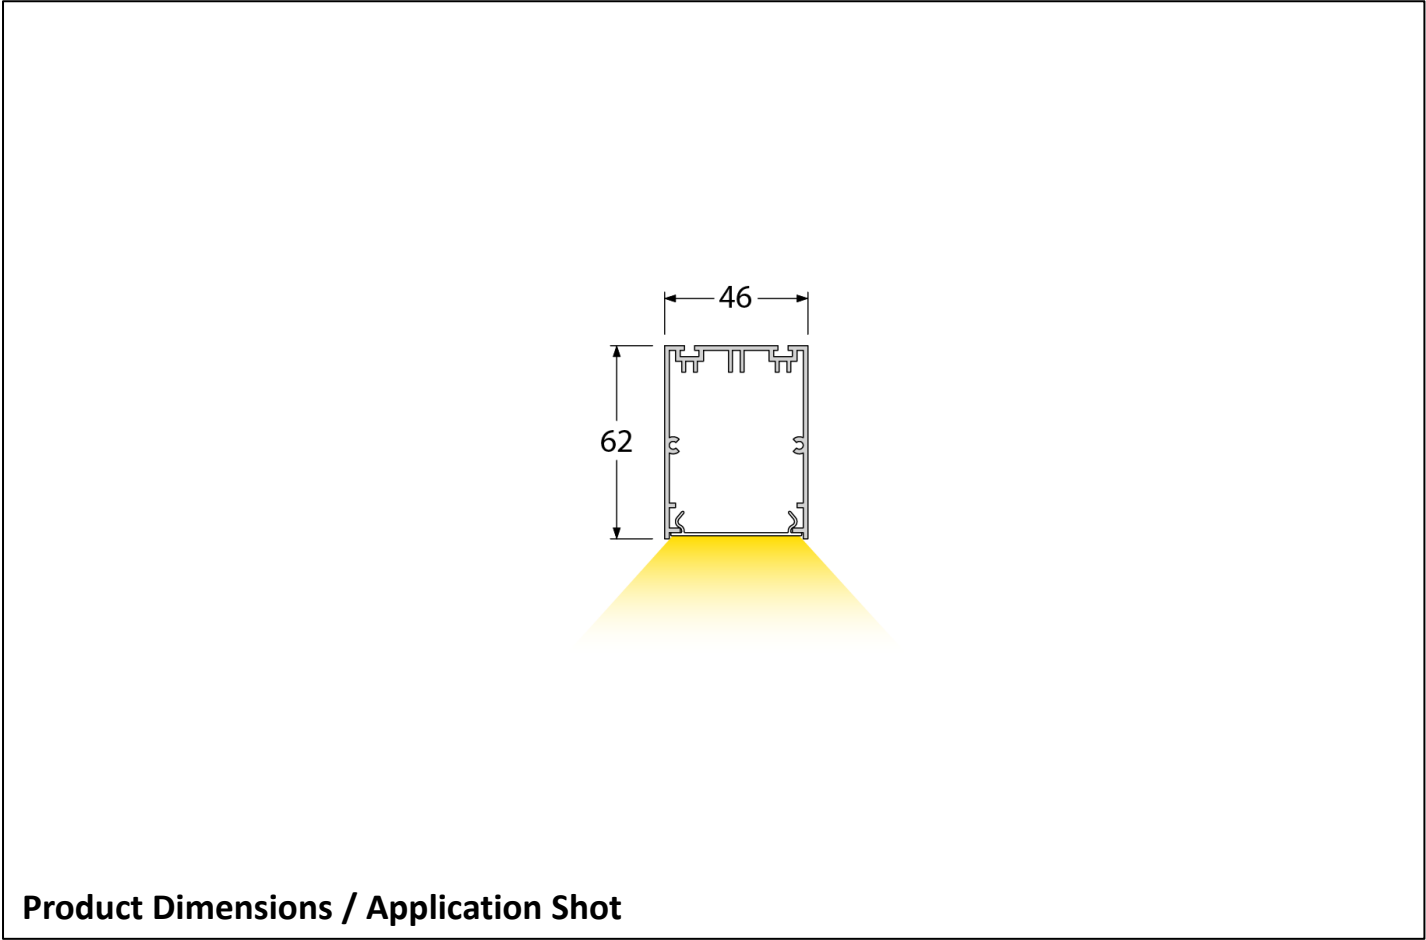


Product Dimensions / Application Shot

TR-48

Description	Suspended 48v track profile
Fixing Type	Suspended
Finish	TBC
Attachments / Spec	Allow for 48v track length as drawn
Colour Temperature	NA
Colour Rendering Index	NA
Light Source	LED
Dimming Protocol	DALI
Wattage	NA
Lumen Output	NA
Lumens per Watt	NA
IP Rating	20
Notes	Include for all drivers, connections and fixing details necessary for complete working installation
Manufacturer	Lucent Lighting
Reference	Fine Line System suspended
Contact	Alex Hay E: Alex@lucent-lighting.com T: (0) 7971663060

Artin.

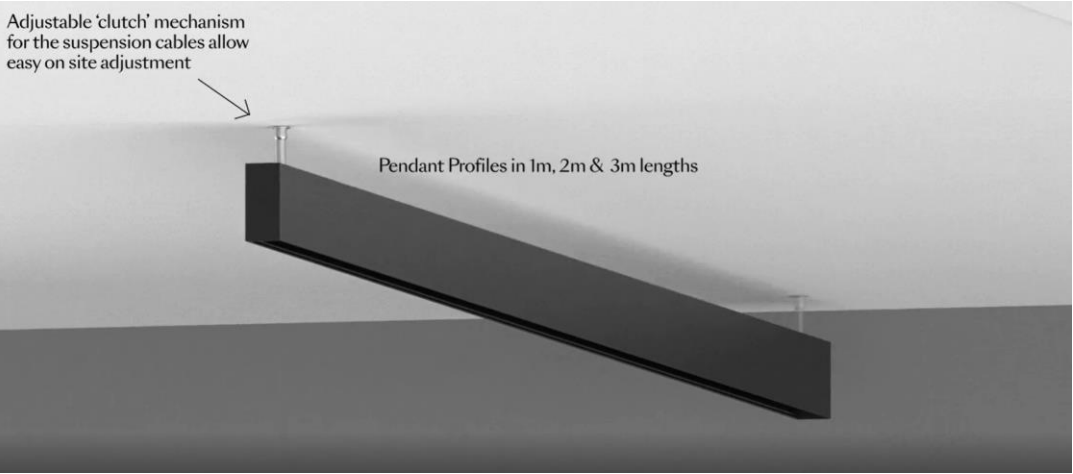


Product Image

Product Dimensions / Application Shot


L13

Description	48V Magnetic track downlight
Fixing Type	Track mounted
Finish	TBC
Attachments / Spec	48 degree beam Allow for 48v track length as drawn
Colour Temperature	2700K
Colour Rendering Index	>90
Light Source	LED
Dimming Protocol	DALI
Wattage	13 w
Lumen Output	850 lm
Lumens per Watt	65 lm/w
IP Rating	20
Notes	Include for all drivers, connections and fixing details necessary for complete working installation
Manufacturer	Lucent Lighting
Reference	Fine Line System – Line 5LED Cube
Contact	Alex Hay E: Alex@lucent-lighting.com T: (0) 7971663060

Artin.

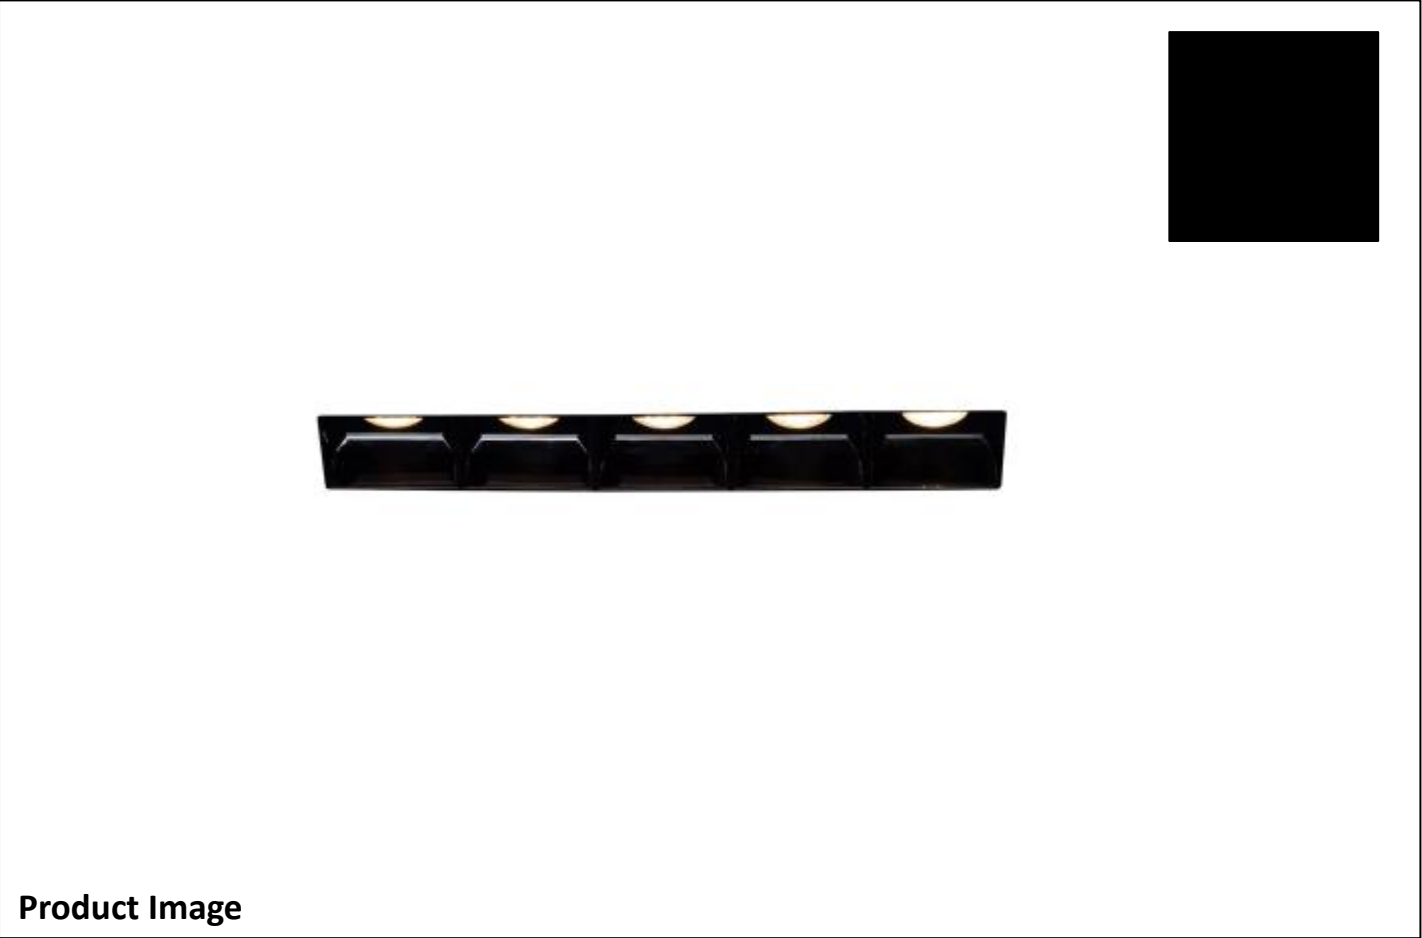

Product Image

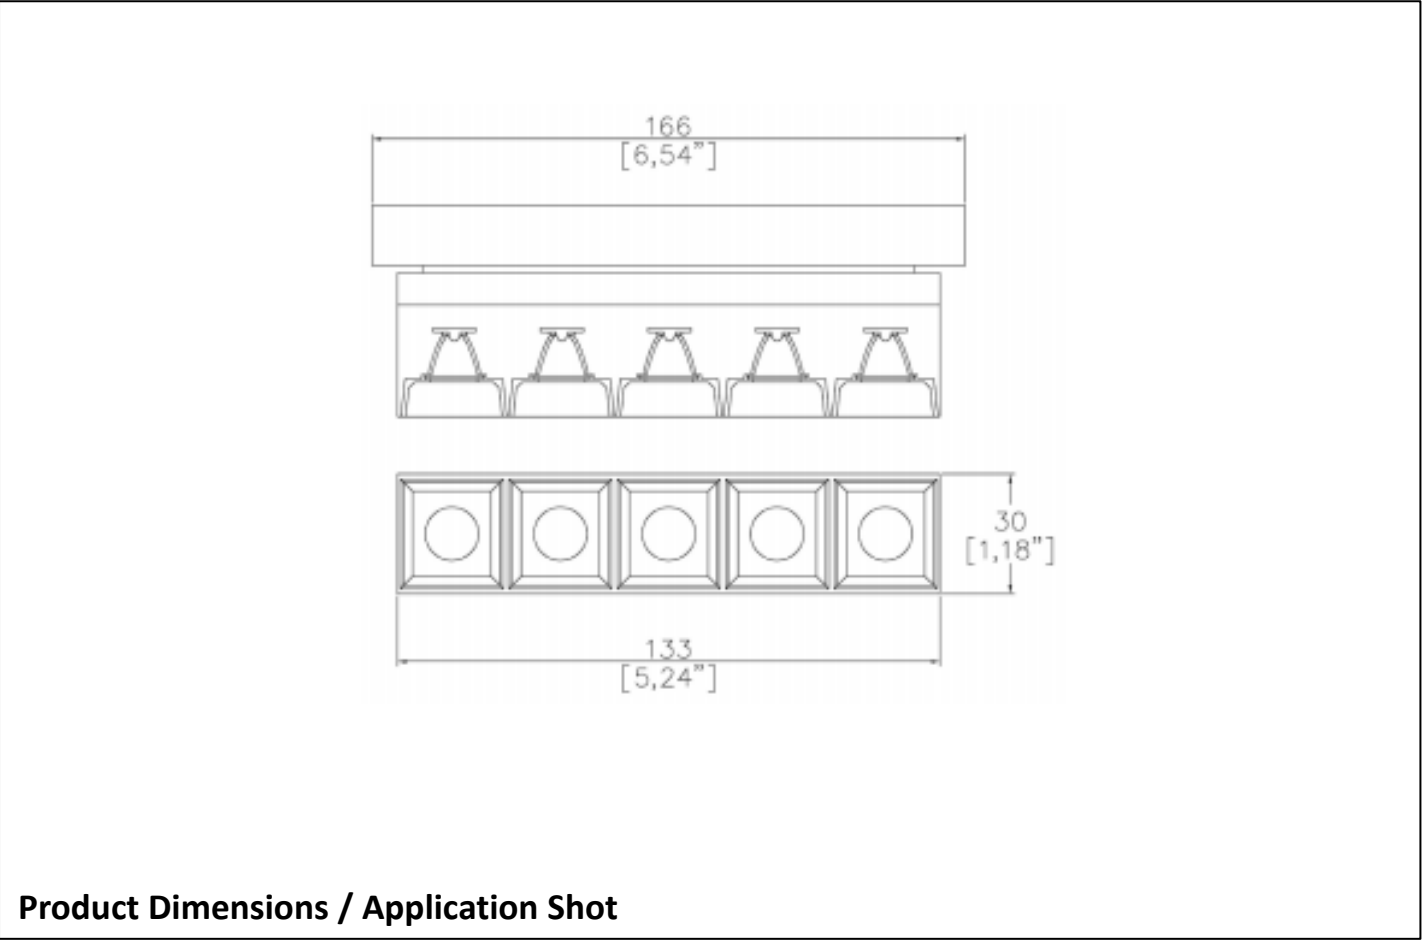

Product Dimensions / Application Shot


L14

Description	48V Magnetic track spotlight
Fixing Type	Track mounted
Finish	TBC
Attachments / Spec	24 degree beam Allow for 48v track length as drawn
Colour Temperature	2700K
Colour Rendering Index	>90
Light Source	LED
Dimming Protocol	DALI
Wattage	7.4 w
Lumen Output	478 lm
Lumens per Watt	64 lm/w
IP Rating	20
Notes	Include for all drivers, connections and fixing details necessary for complete working installation
Manufacturer	Lucent Lighting
Reference	Fine Line System – Tube LED Micro
Contact	Alex Hay E: Alex@lucent-lighting.com T: (0) 7971663060

Artin.



Product Image

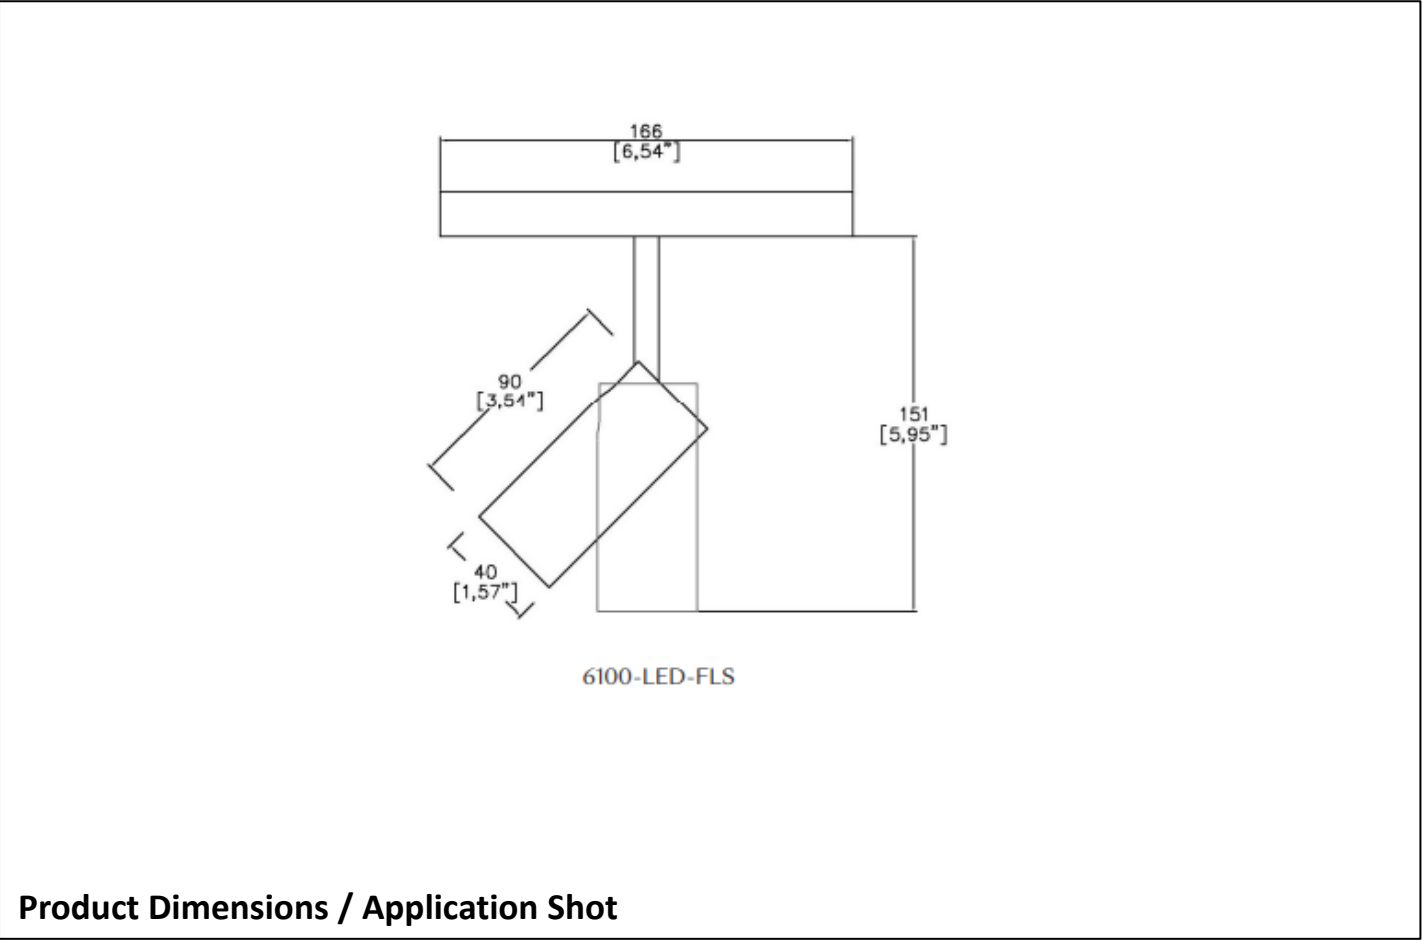

Product Dimensions / Application Shot


L15-(N,M,W,F)

Description	Adjustable LED downlight with inset LED light source
Fixing Type	Ceiling Recessed
Finish	TBC
Attachments / Spec	Glare Louvre
Colour Temperature	2700K
Colour Rendering Index	>90
Light Source	LED
Dimming Protocol	DALI
Wattage	13.6 w
Lumen Output	847 lm
Lumens per Watt	62 lm/w
IP Rating	20
Notes	Include for all drivers, connections and fixing details necessary for complete working installation
Manufacturer	Lucent Lighting
Reference	Edge 90 Accent
Contact	Alex Hay E: Alex@lucent-lighting.com T: (0) 7971663060


Artin.

MANUFACTURER / CONTRACTOR NOTES

‘N’ Denotes 12 degree optic
‘M’ Denotes 24 degree optic
‘W’ Denotes 38 degree optic
‘F’ Denotes 55 degree optic

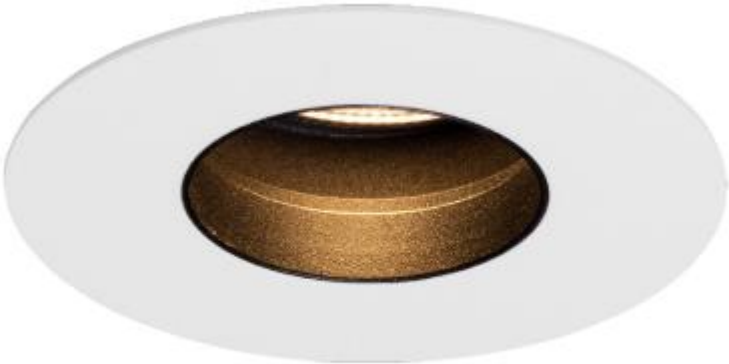

Product Image

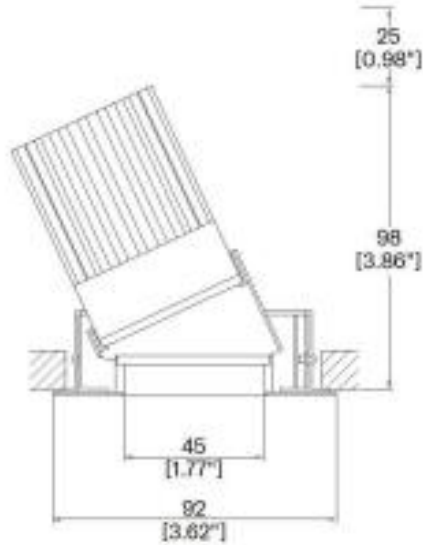

91413-A-LED + 9000-PBZ
Cut-out 83mm Ø

Product Dimensions / Application Shot

L16-(N,M,W,F)

Description	Adjustable LED downlight with inset LED light source
Fixing Type	Ceiling Recessed
Finish	TBC
Attachments / Spec	Glare Louvre
Colour Temperature	2700K
Colour Rendering Index	>90
Light Source	LED
Dimming Protocol	DALI
Wattage	2.6 w
Lumen Output	159 lm
Lumens per Watt	61 lm/w
IP Rating	20
Notes	Include for all drivers, connections and fixing details necessary for complete working installation
Manufacturer	Lucent Lighting
Reference	Micro 40 Focus Accent
Contact	Alex Hay E: Alex@lucent-lighting.com T: (0) 7971663060


Artin.

MANUFACTURER / CONTRACTOR NOTES

‘N’ Denotes 15 degree optic
‘M’ Denotes 25 degree optic
‘W’ Denotes 30 degree optic



Product Image

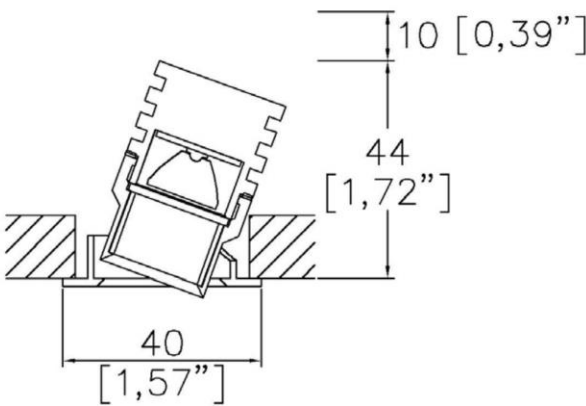

043-FA-TR
Cut-out 36mm Ø

Product Dimensions / Application Shot


L17- (N,M,W,F)

Description	Adjustable LED spotlight with deep recess LED and honeycomb louvre
Fixing Type	Track mounted
Finish	Black
Attachments / Spec	Honeycomb louvre
Colour Temperature	2700K
Colour Rendering Index	>90
Light Source	LED
Dimming Protocol	DALI
Wattage	14.8 w
Lumen Output	936 lm
Lumens per Watt	66 lm/w
IP Rating	20
Notes	Include for all drivers, connections and fixing details necessary for complete working installation
Manufacturer	Lucent Lighting
Reference	TubeLED Mini Track
Contact	Alex Hay E: Alex@lucent-lighting.com T: (0) 7971663060


Artin.

MANUFACTURER / CONTRACTOR NOTES

‘N’ Denotes 12 degree optic
‘M’ Denotes 24 degree optic
‘W’ Denotes 36 degree optic
‘F’ Denotes 60 degree optic



Product Image

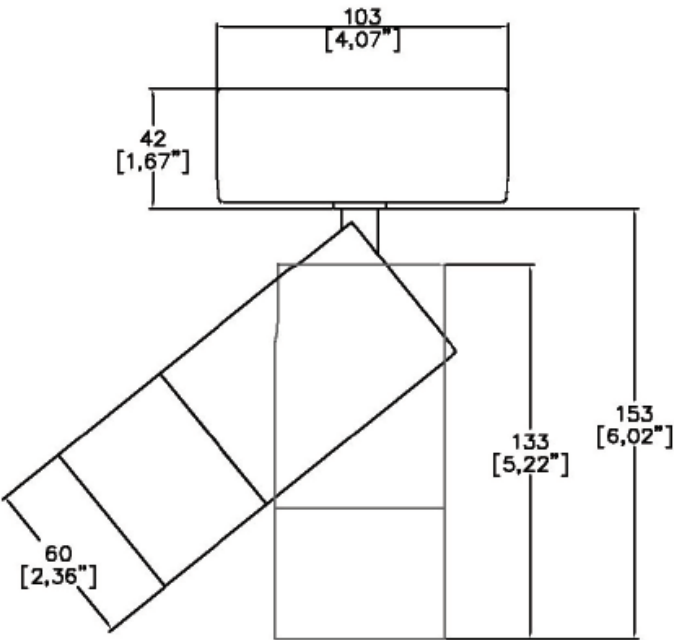

Product Dimensions / Application Shot

DT

Description	DALI track
Fixing Type	Suspended TBC
Finish	Black
Attachments / Spec	Suspension kit
Colour Temperature	NA
Colour Rendering Index	NA
Light Source	NA
Dimming Protocol	NA
Wattage	NA
Lumen Output	NA
Lumens per Watt	NA
IP Rating	NA
Notes	Include for all drivers, connections and fixing details necessary for complete working installation
Manufacturer	Lucent Lighting
Reference	DALI Track
Contact	Alex Hay E: Alex@lucent-lighting.com T: (0) 7971663060

Artin.



Product Image




Product Dimensions / Application Shot


L18

Description	Suspended linear profile with MPO diffuser
Fixing Type	Suspended
Finish	Black
Attachments / Spec	Anti glare diffuser
Colour Temperature	2700K
Colour Rendering Index	>90
Light Source	LED
Dimming Protocol	DALI
Wattage	21 w/m
Lumen Output	2861 lm/m
Lumens per Watt	136 lm/w
IP Rating	20
Notes	Include for all drivers, connections and fixing details necessary for complete working installation
Manufacturer	OptaLED
Reference	Icon 46 - MPO
Contact	Neil Makin E: neil.makin@optaled.com T: 07908439300

Artin.

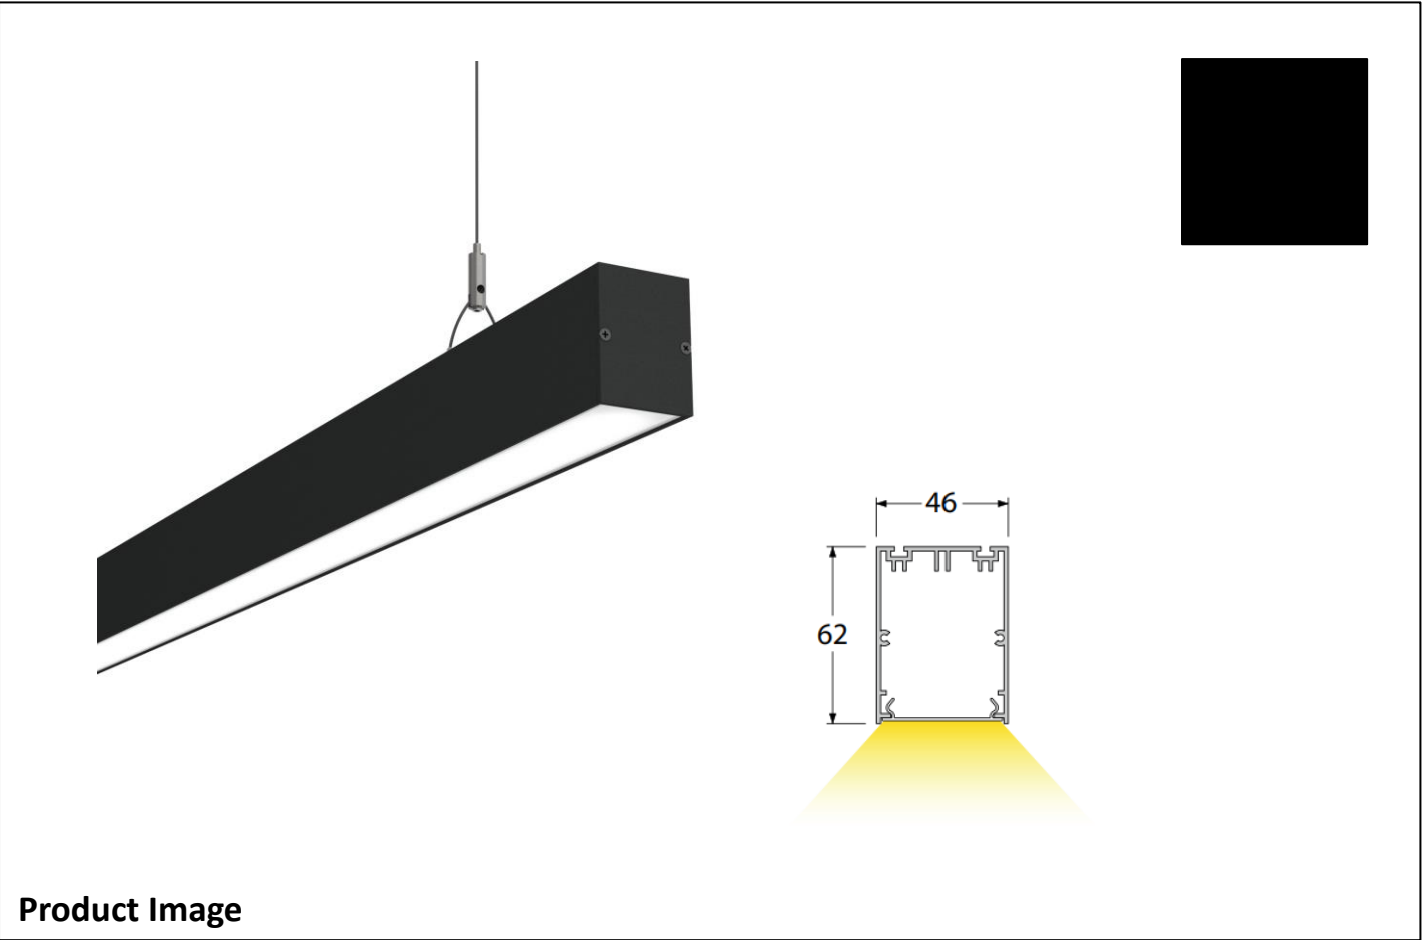

Product Image

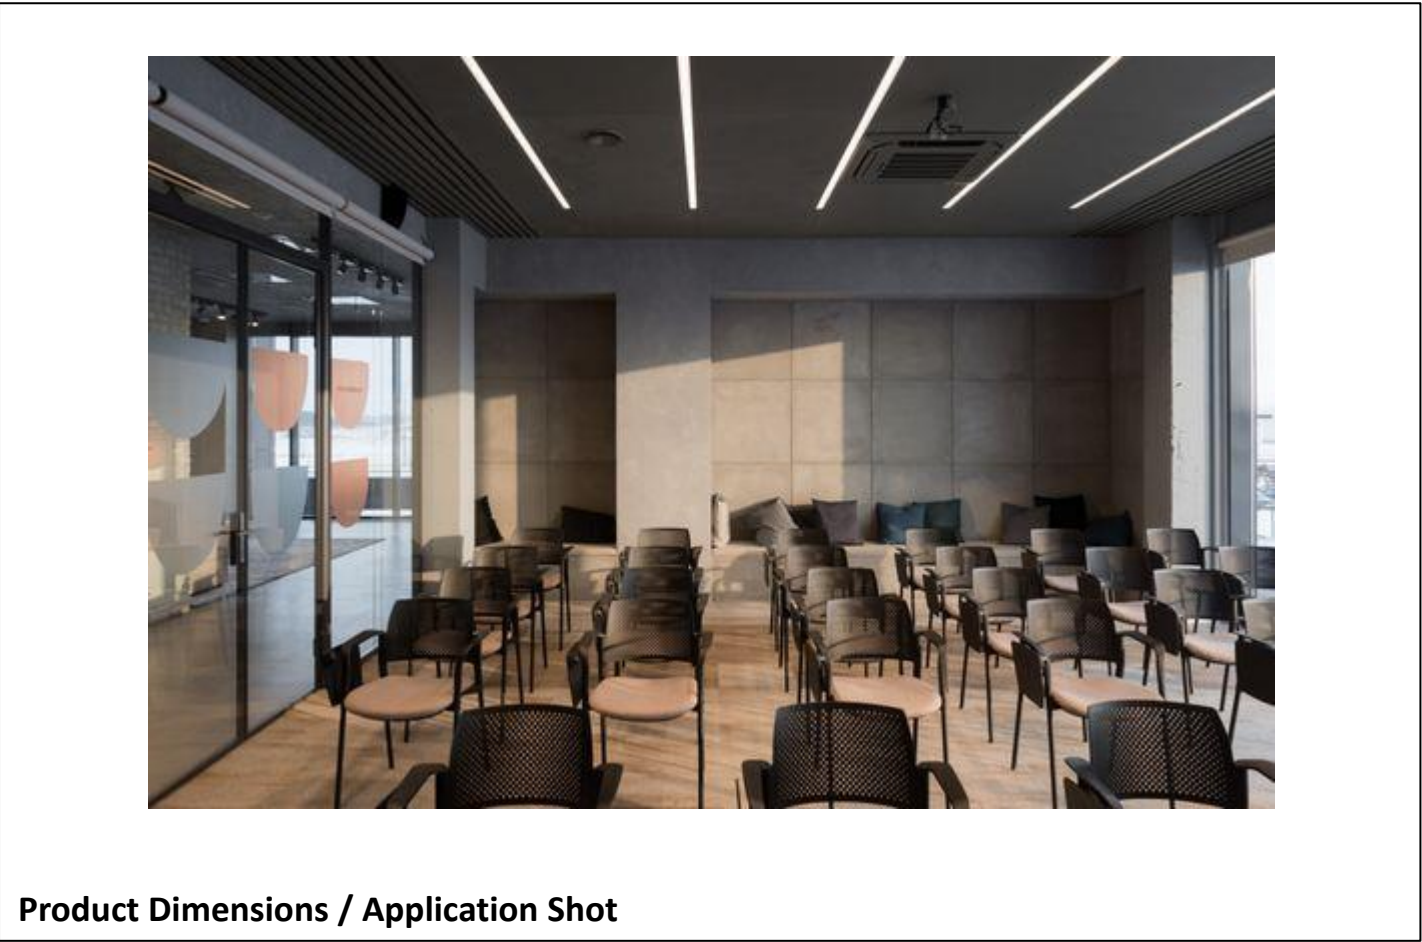


Product Dimensions / Application Shot


L19

Description	Direct and Indirect RGBW line of light
Fixing Type	Suspended
Finish	Black
Attachments / Spec	Suspension kit Allow high output RGBW LED within profile
Colour Temperature	RGBW (2700K)
Colour Rendering Index	>90
Light Source	LED
Dimming Protocol	DMX
Wattage	Indirect - 19 w/m Direct – 38 w/m
Lumen Output	Red up to 630 lm/m Green up to 530 lm/m Blue up to 475 lm/m White up to 850 lm/m
Lumens per Watt	NA
IP Rating	20
Notes	Include for all drivers, connections and fixing details necessary for complete working installation
Manufacturer	Optaled
Reference	Direct and Indirect Icon 50 – Allow for length as drawn
Contact	Neil Makin E: neil.makin@optaled.com T: (0) 7908 439 300

Artin.

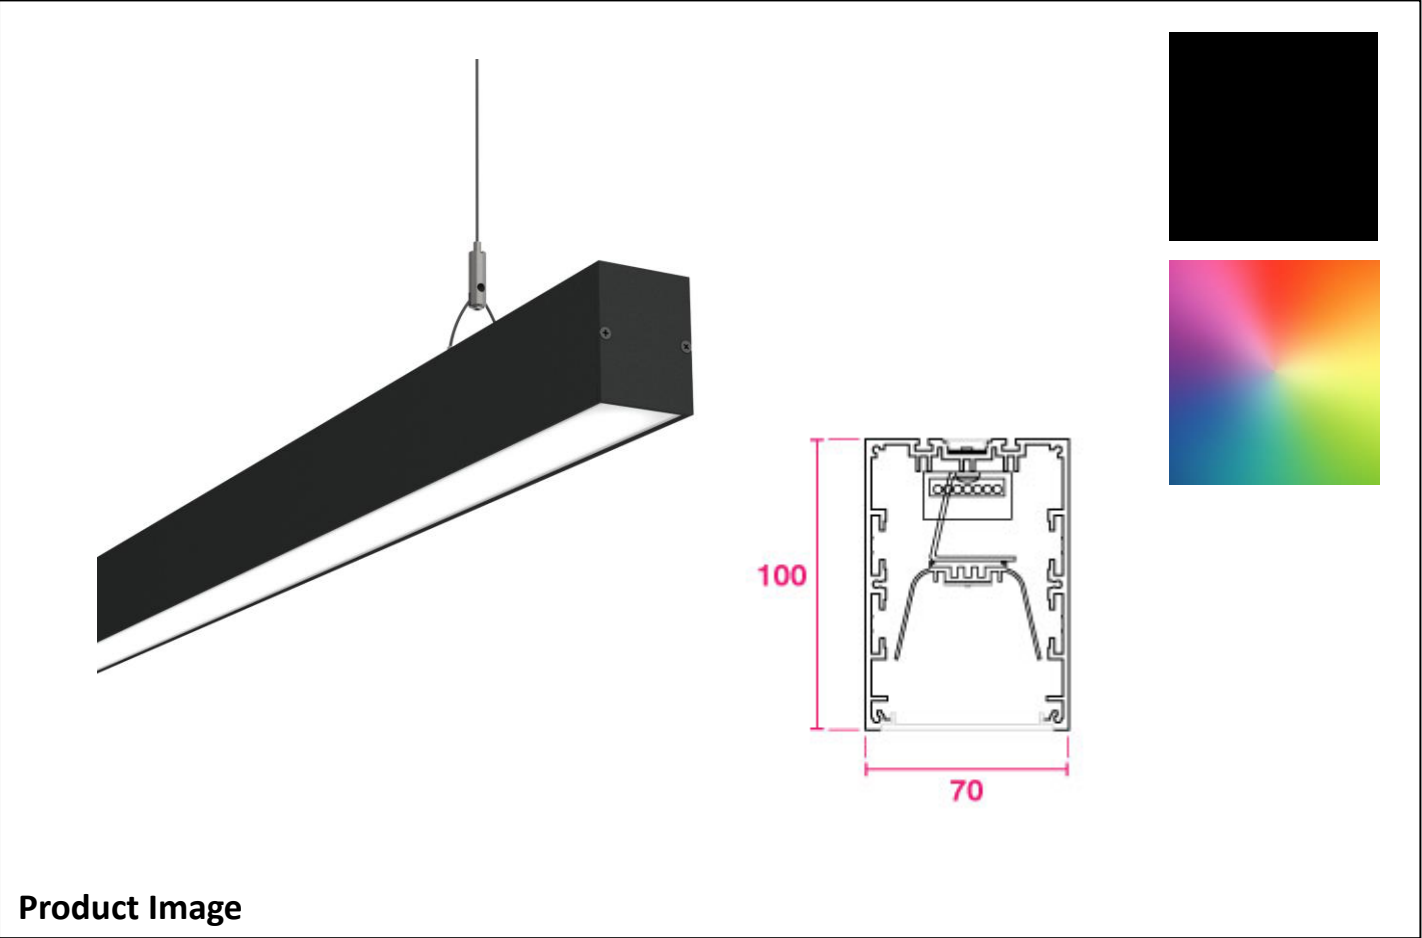

Product Image

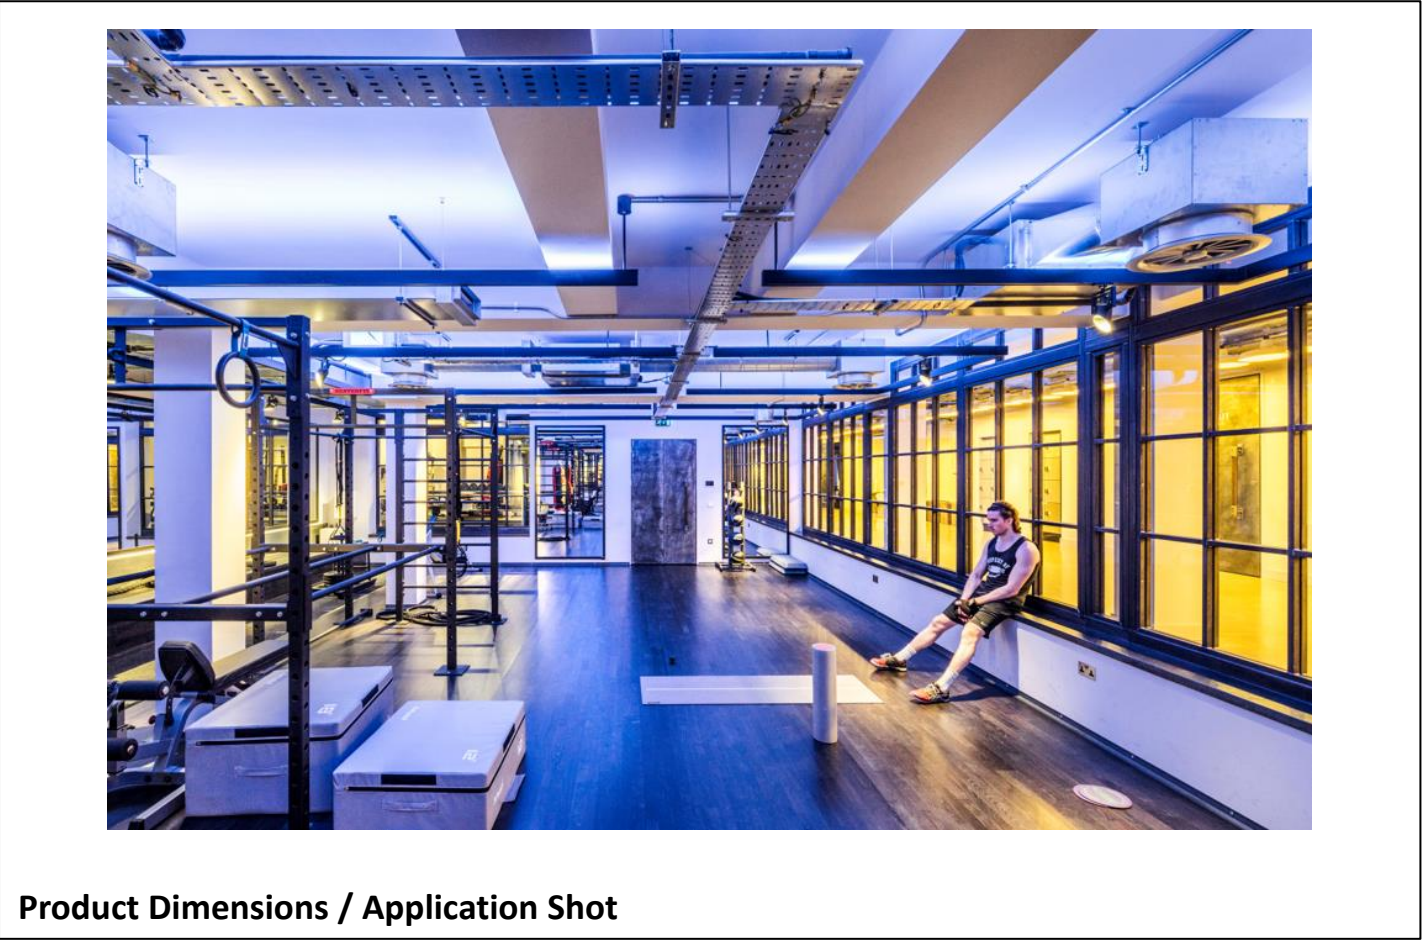

Product Dimensions / Application Shot

L20

Description	RGBW linear LED profile with opal diffuser Entrance Reception – Uplighting from columns - Ground Floor
Fixing Type	Surface Mounted
Finish	NA
Attachments / Spec	Surface mounted fixing clips
Colour Temperature	RGBW (2700K)
Colour Rendering Index	>80
Light Source	LED
Dimming Protocol	DMX
Wattage	19 w/m
Lumen Output	Red up to 630 lm/m Green up to 530 lm/m Blue up to 475 lm/m White up to 850 lm/m
Lumens per Watt	N/A
IP Rating	20
Notes	Include for all drivers, connections and fixing details necessary for complete working installation
Manufacturer	Optaled
Reference	Optos 1 + Microflex RGBW
Contact	Neil Makin E: neil.makin@optaled.com T: (0) 7908 439 300

Artin.




Allow for Length as drawn

Opal Diffuser

MINIMUM 75% LIGHT TRANSMITTANCE

Product Image

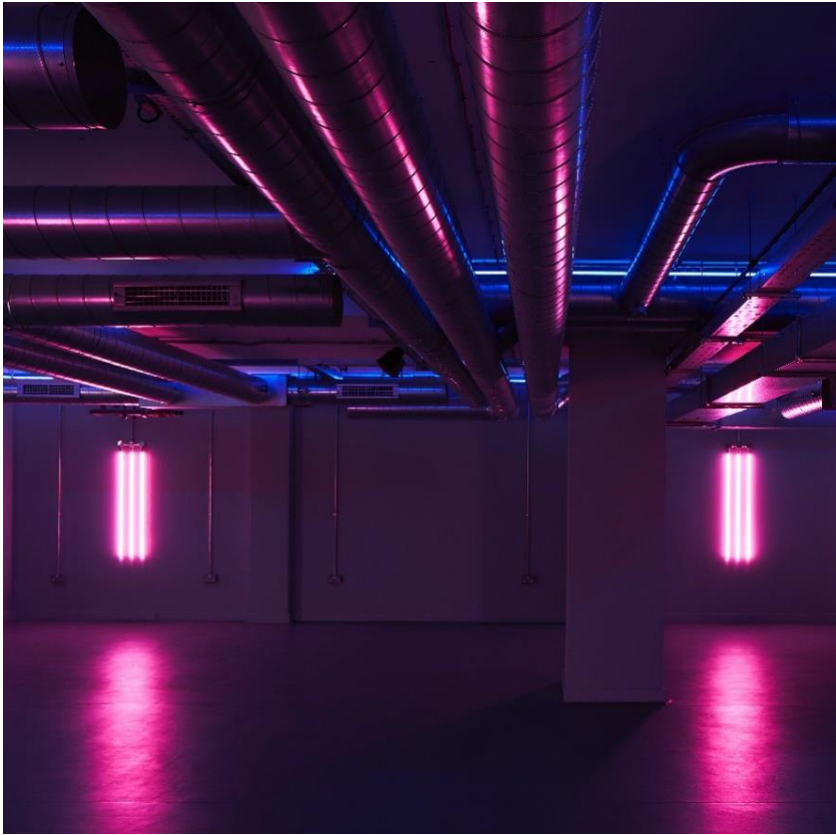

Product Dimensions / Application Shot

L21

Description	Low profile LED unit with opal diffuser
Fixing Type	Surface mounted within interior cove detail
Finish	NA
Attachments / Spec	Aluminum channel Clear diffuser
Colour Temperature	2700K
Colour Rendering Index	>90
Light Source	LED
Dimming Protocol	DALI
Wattage	19.2w/m
Lumen Output	1700 lm/m
Lumens per Watt	87 lm/w
IP Rating	20
Notes	Include for all drivers, connections and fixing details necessary for complete working installation
Manufacturer	Tryka
Reference	Adder 240 LED
Contact	Colin Gawne E: Colin.Gawne@tryka.com T: 07890110951

Artin.

PRO002
Slim Surface Mount
Aluminium Profile




TRY-FLEX-MK-PRO002-AP-YY


Opal Cover
TRY- FLEX-MK-PRO002-OC-YY

Clear Cover
TRY-FLEX-MK-PRO002-CC

End Cap Set
TRY-FLEX-MK-PRO002-EC-SET

Fixing Clip - Pair
TRY-FLEX-MK-PRO002-FC-PAIR






Product Image



L22 (E)

Description	Surface fixed line of light with opal diffuser
Fixing Type	Surface
Finish	RAL TBC
Attachments / Spec	Allow for lengths / corner junctions as drawn on the lighting layout drawing. Allow for internal connection light spill shields 'E' denotes with 3 hr integral emergency battery pack
Colour Temperature	2700K
Colour Rendering Index	>90
Light Source	LED
Dimming Protocol	DALI
Wattage	14 w/m
Lumen Output	2600 lm/m
Lumens per Watt	186 lm/w
IP Rating	20
Notes	Include for all drivers, connections and fixing details necessary for complete working installation
Manufacturer	OptaLED
Reference	Icon 46 (High Efficiency / Opal)
Contact	Neil Makin E: neil.makin@optaled.com T: 07908439300



Artin.

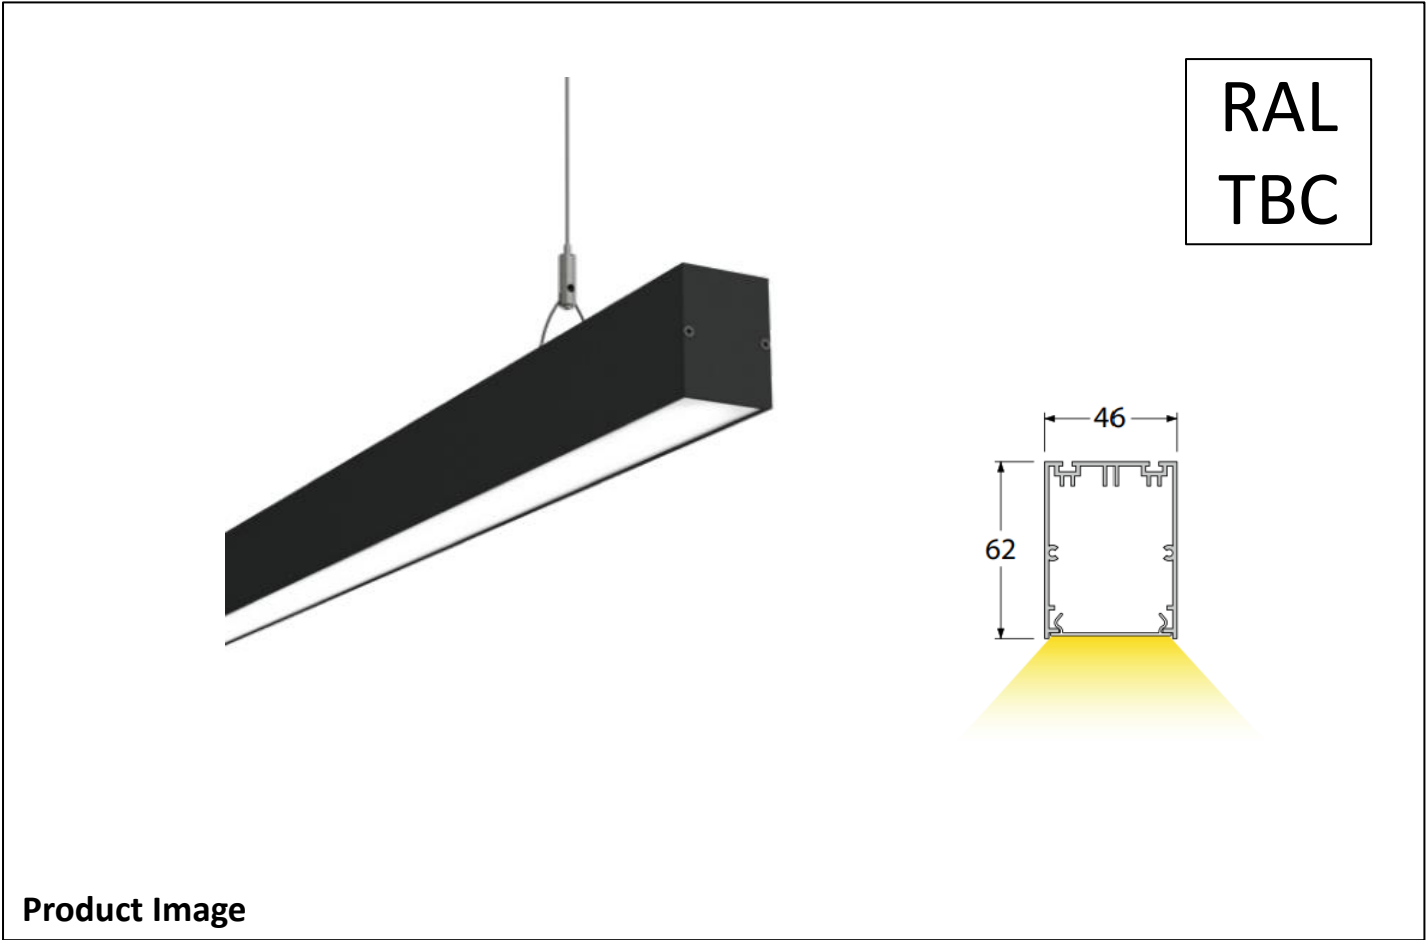

L23

Description	Vertical wall mounted side light profile
Fixing Type	Wall mounted
Finish	RAL TBC
Attachments / Spec	
Colour Temperature	2700K
Colour Rendering Index	>90
Light Source	LED
Dimming Protocol	DALI
Wattage	24 w/m
Lumen Output	2785 lm/m
Lumens per Watt	116 lm/w
IP Rating	20
Notes	Include for all drivers, connections and fixing details necessary for complete working installation
Manufacturer	OptaLED
Reference	Nova 46 – bespoke – 1500mm H
Contact	Neil Makin E: neil.makin@optaled.com T: 07908439300



Artin.

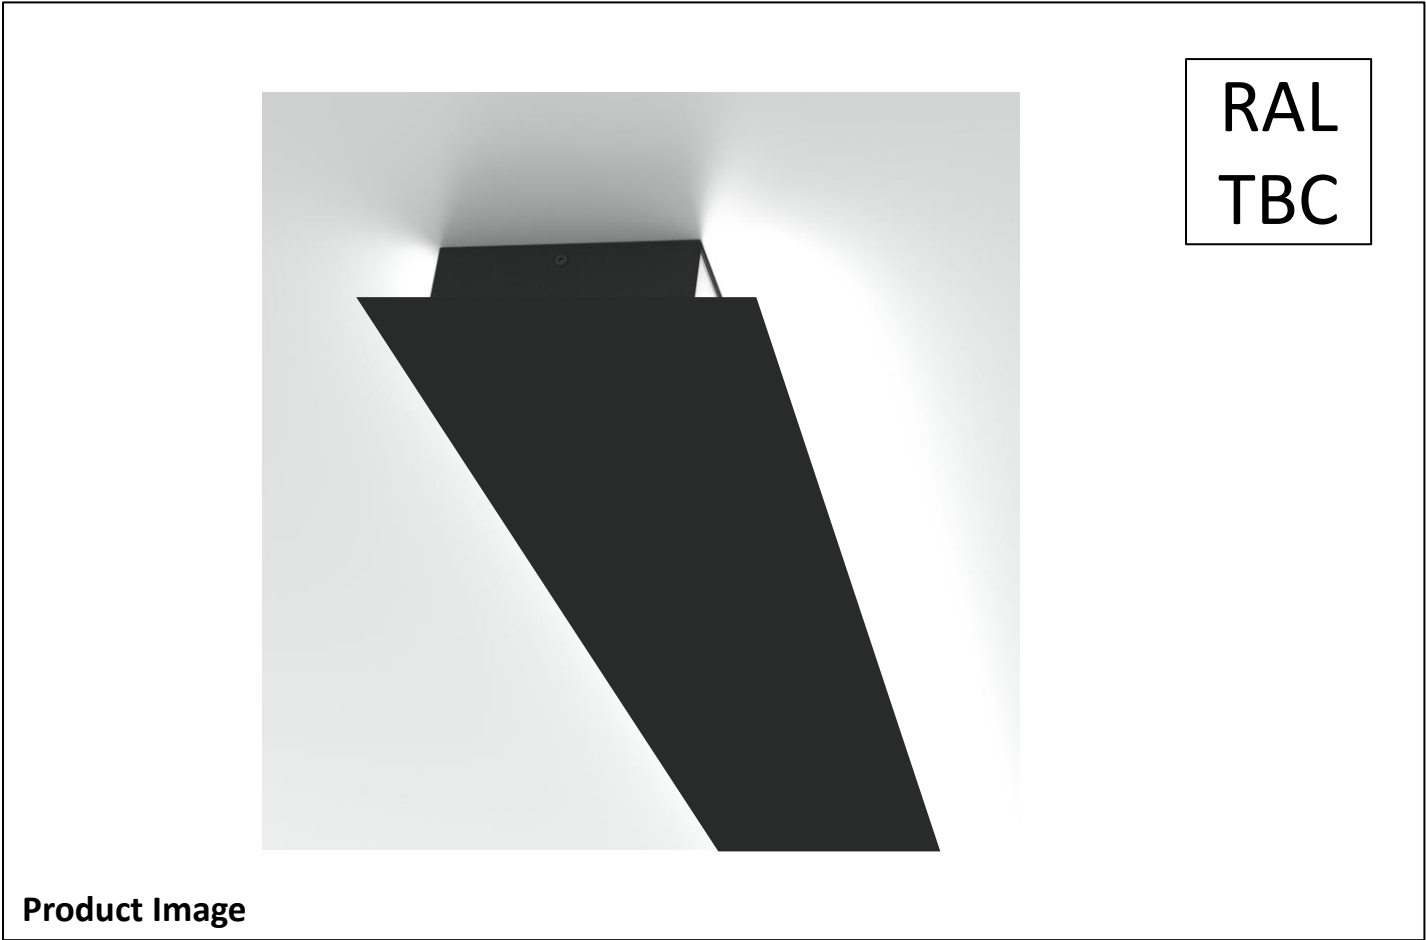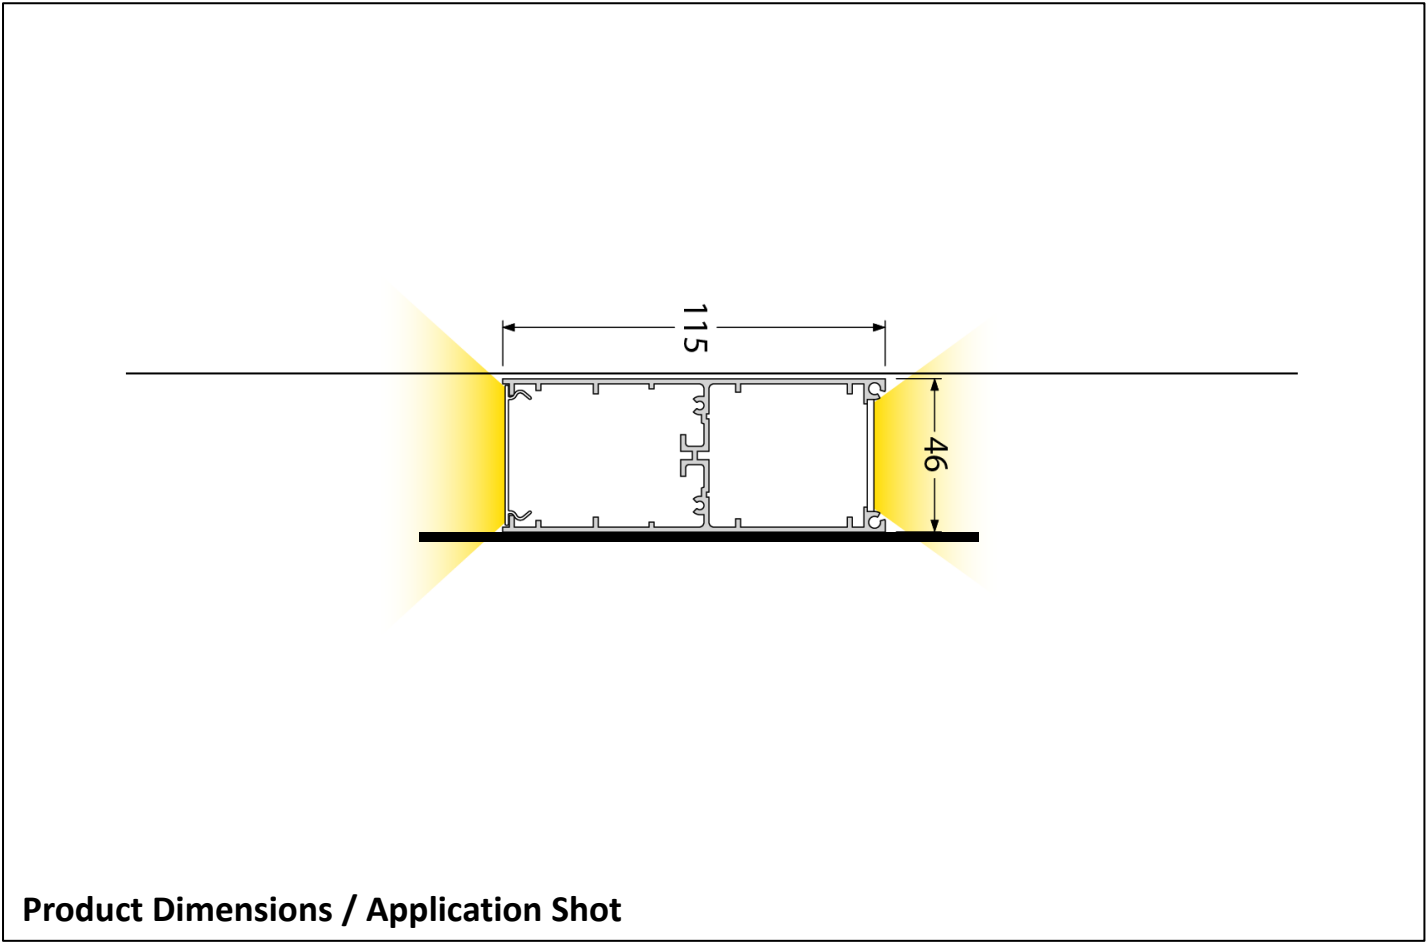

L23C

Description	Vertical wall mounted side light profile
Fixing Type	Wall mounted
Finish	RAL TBC
Attachments / Spec	
Colour Temperature	RGBW (2700K)
Colour Rendering Index	>90
Light Source	LED
Dimming Protocol	19 w/m
Wattage	Red up to 630 lm/m Green up to 530 lm/m Blue up to 475 lm/m White up to 850 lm/m
Lumen Output	N/A
Lumens per Watt	19 w/m
IP Rating	20
Notes	Include for all drivers, connections and fixing details necessary for complete working installation
Manufacturer	OptaLED
Reference	Nova 46 – bespoke – 1500mm H
Contact	Neil Makin E: neil.makin@optaled.com T: 07908439300


Artin.

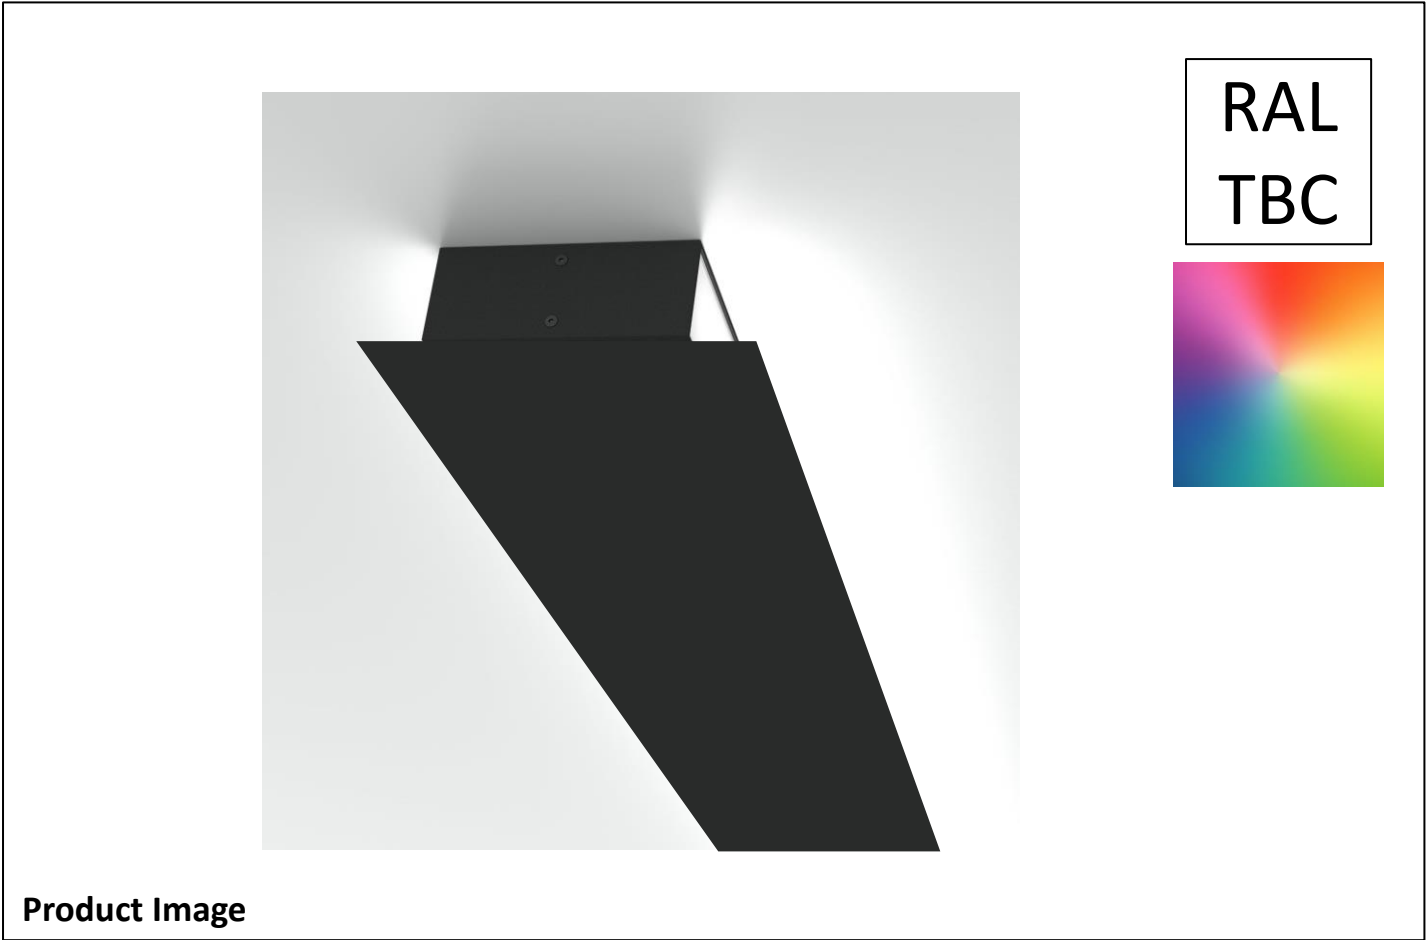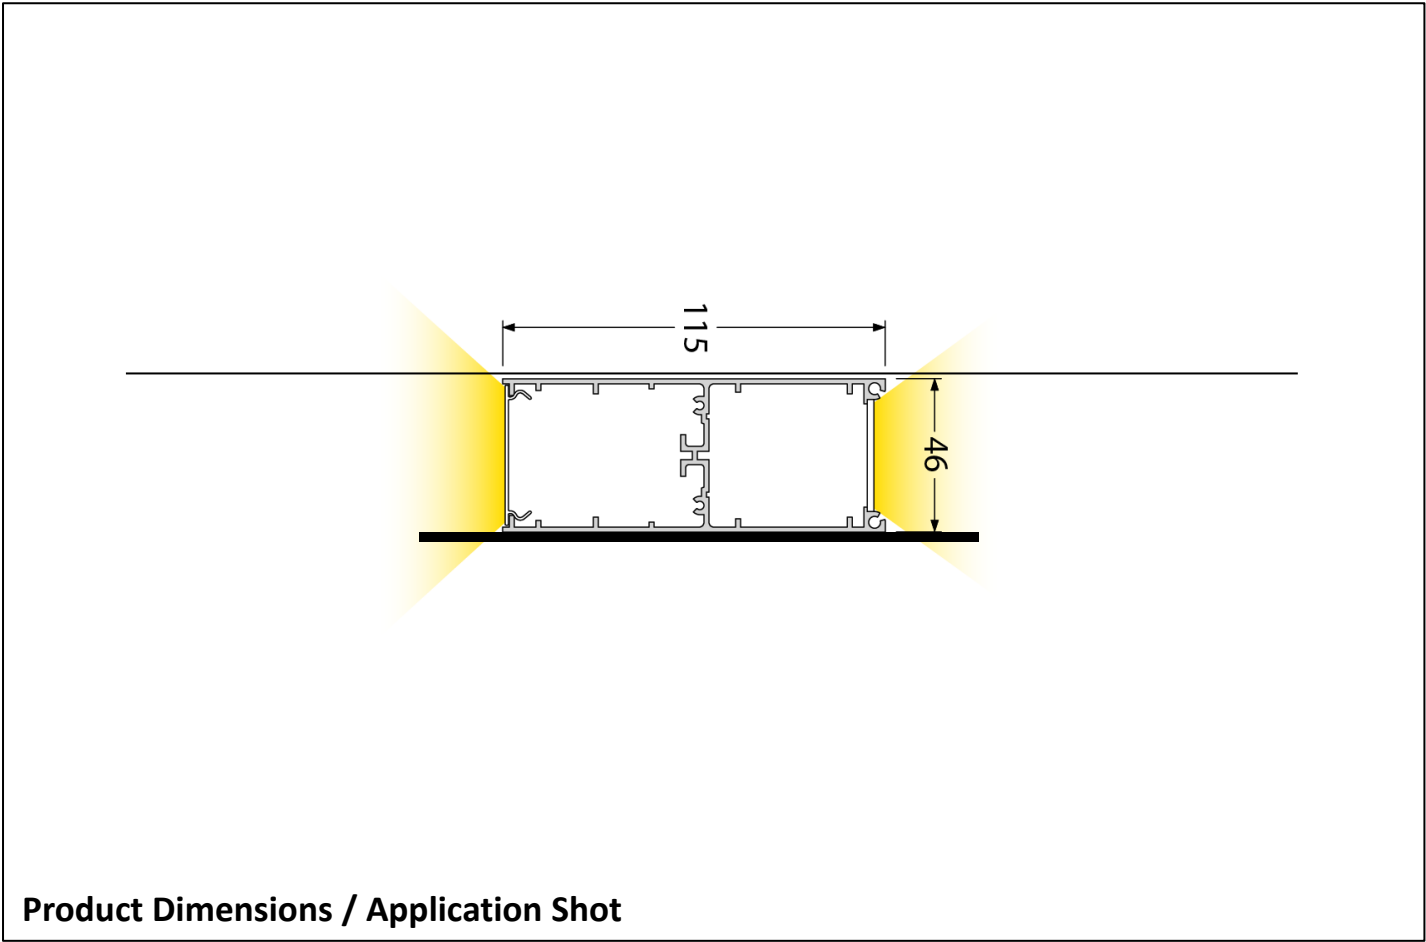

L24

Description	Indirect RGBW line of light with clear diffuser – Circular formation
Fixing Type	Suspended
Finish	Black
Attachments / Spec	Suspension kit Allow 3no runs of high output RGBW LED within profile
Colour Temperature	2700K
Colour Rendering Index	>90
Light Source	LED
Dimming Protocol	DALI
Wattage	24 w/m
Lumen Output	2785 lm/m
Lumens per Watt	116 lm/w
IP Rating	20
Notes	Include for all drivers, connections and fixing details necessary for complete working installation
Manufacturer	Optaled
Reference	Indirect Icon 100 Flat– Allow for length as drawn
Contact	Neil Makin E: neil.makin@optaled.com T: (0) 7908 439 300

Artin.



100

55


Product Image

Product Dimensions / Application Shot

TR1-X – (A,B,C)

Description	Suspended profile luminaire with indirect linear LED optic and direct track mounted luminaires.
Fixing Type	Suspended
Finish	Black
Attachments / Spec	Suspension kits All kit required for complete installation
Colour Temperature	NA
Colour Rendering Index	>90
Light Source	NA
Dimming Protocol	DALI
Wattage	NA
Lumen Output	NA
Lumens per Watt	NA
IP Rating	20
Notes	Include for all drivers, connections and fixing details necessary for complete working installation
Manufacturer	XAL
Reference	Move It 45 – allow for length as drawn
Contact	Mathew Inett mathew.inett@xal.com T: 07498326439

Artin.

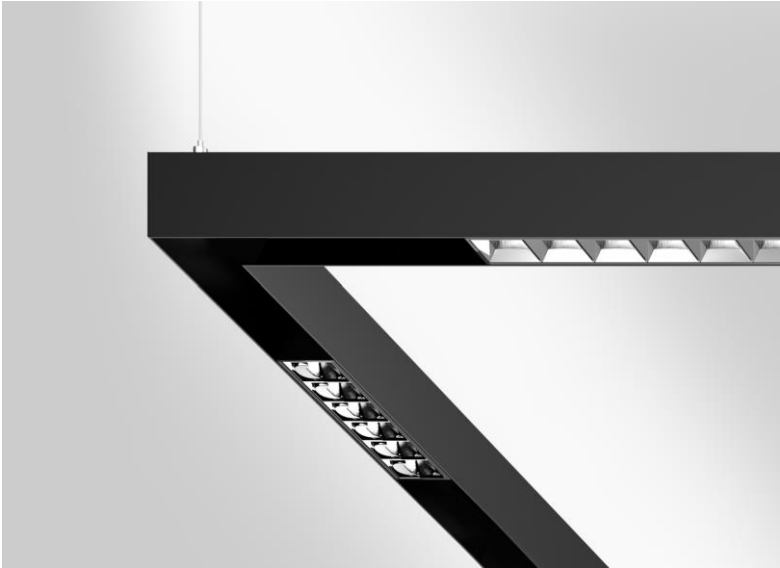

MANUFACTURER / CONTRACTOR NOTES

'A' Denotes 2420mm
'B' Denotes 1220mm
'C' Denotes 620mm


Product Image

Product Dimensions / Application Shot

L25 – (A,B,C)

Description	Indirect linear LED optic and direct track mounted luminaires.
Fixing Type	Suspended
Finish	Black
Attachments / Spec	Suspension kits All kit required for complete installation
Colour Temperature	2700K
Colour Rendering Index	>90
Light Source	LED
Dimming Protocol	DALI
Wattage	33 w/ 2420mm / 15.2 w/1200mm / 6.2 w/620mm
Lumen Output	3380 lm/ 2420mm / 1790 lm/1200mm / 1310 lm/620mm
Lumens per Watt	117 lm/w
IP Rating	20
Notes	Include for all drivers, connections and fixing details necessary for complete working installation
Manufacturer	XAL
Reference	Move It 45 – Indirect – allow for length as drawn
Contact	Mathew Inett mathew.inett@xal.com T: 07498326439

Artin.

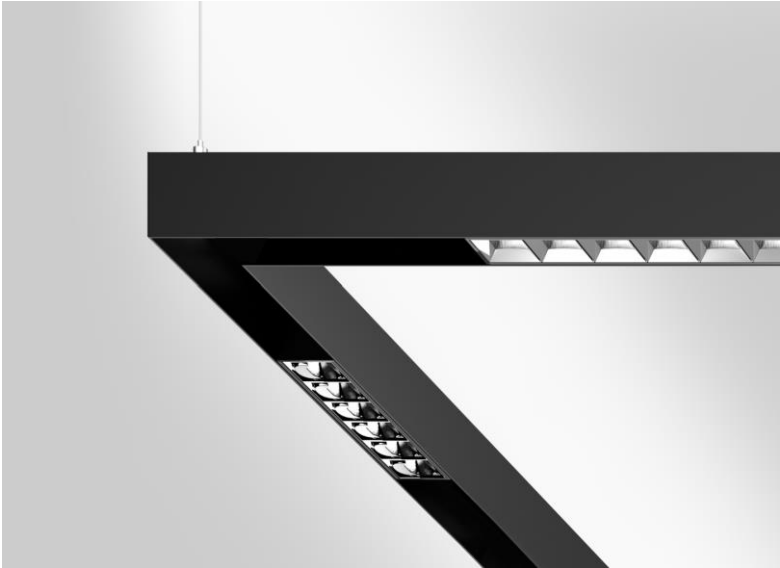

MANUFACTURER / CONTRACTOR NOTES

'A' Denotes 2420mm
'B' Denotes 1220mm
'C' Denotes 620mm

Product Image





Product Dimensions / Application Shot

L26IP(E)

Description	Surface mounted line of light to shower room vanity units
Fixing Type	Surface Mounted
Finish	RAL TBC
Attachments / Spec	Allow for lengths / corner junctions as drawn on the lighting layout drawing. Allow for internal connection light spill shields 'E' denotes with 3 hr integral emergency battery pack
Colour Temperature	2700K
Colour Rendering Index	>90
Light Source	LED
Dimming Protocol	DALI
Wattage	14 w/m
Lumen Output	2600 lm/m
Lumens per Watt	186 lm/w
IP Rating	44
Notes	Include for all drivers, connections and fixing details necessary for complete working installation
Manufacturer	OptaLED
Reference	Icon 46 – IP (High Efficiency / Opal)
Contact	Neil Makin E: neil.makin@optaled.com T: 07908439300

Artin.

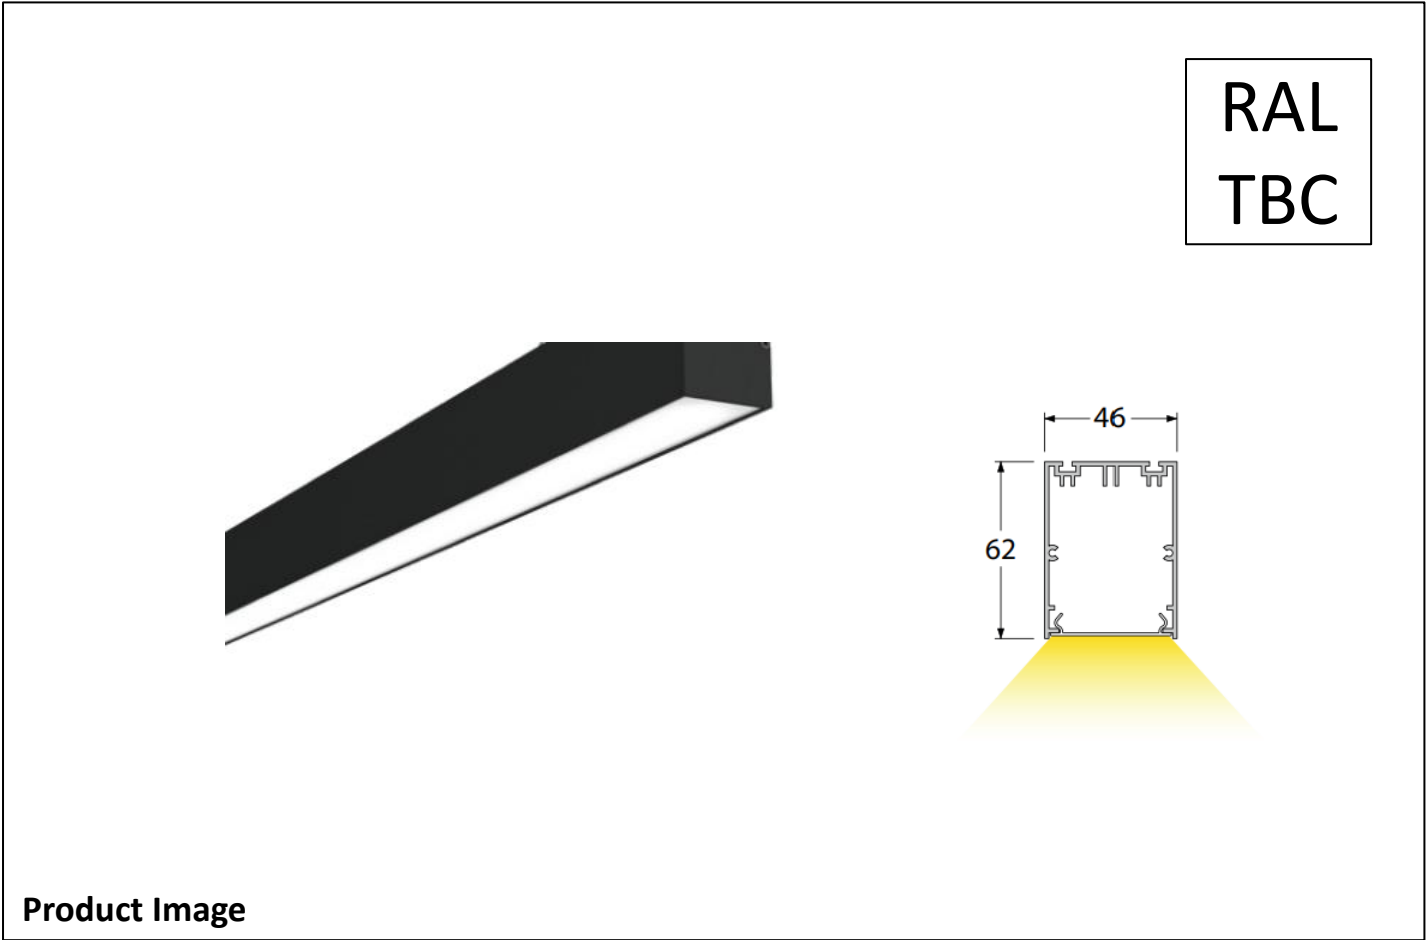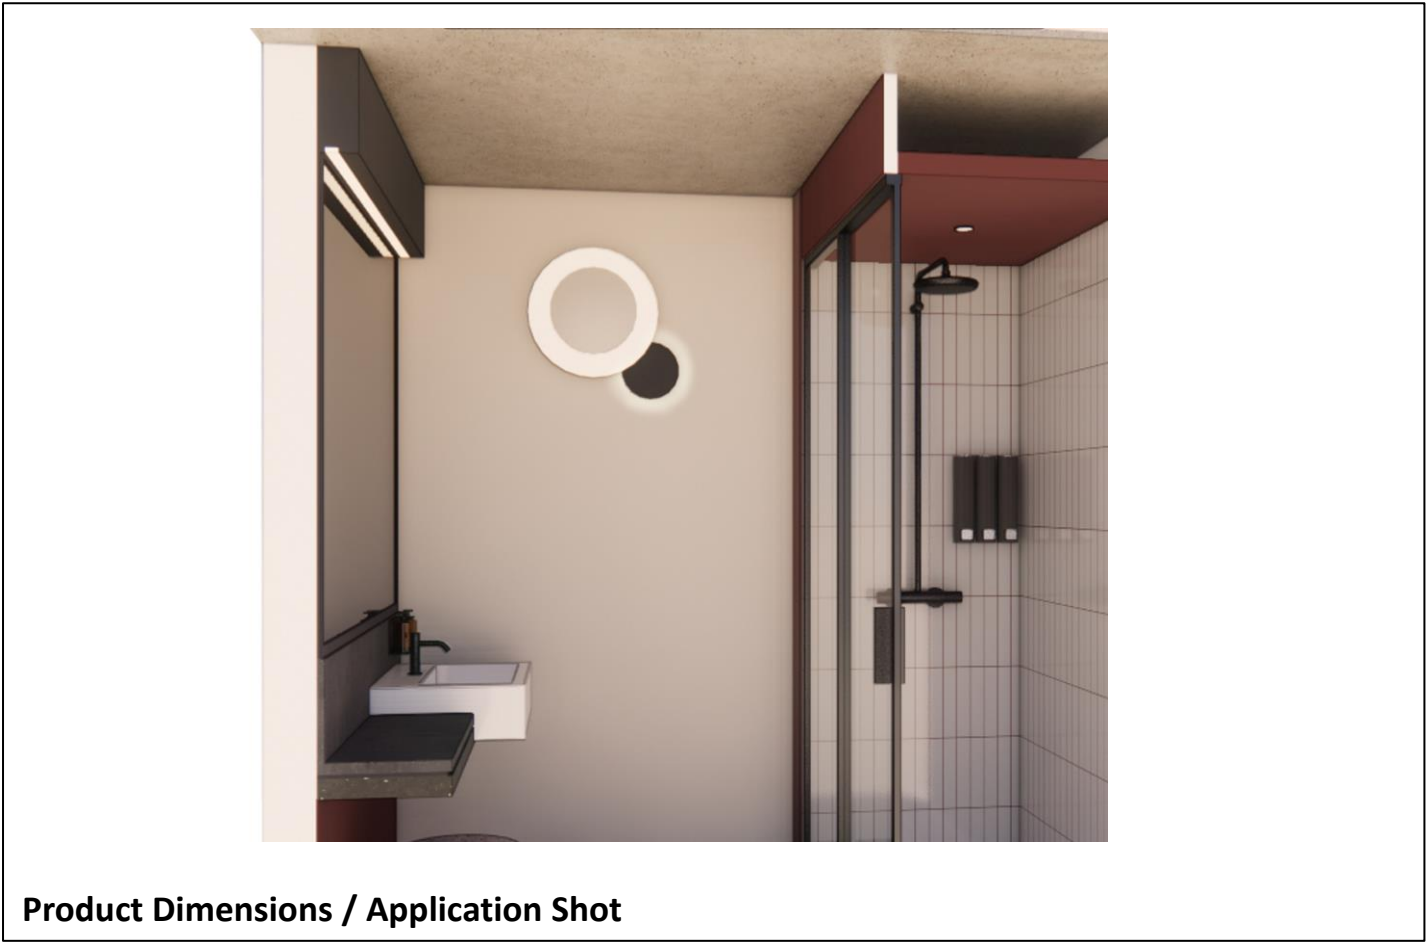

L28

Description	Magnetic track inset
Fixing Type	Track mounted
Finish	Black
Attachments / Spec	Suspension kits All kit required for complete installation
Colour Temperature	2700K
Colour Rendering Index	>90
Light Source	LED
Dimming Protocol	DALI
Wattage	11.2 w
Lumen Output	987 lm
Lumens per Watt	88 lm/w
IP Rating	20
Notes	Include for all drivers, connections and fixing details necessary for complete working installation
Manufacturer	XAL
Reference	Move It 45 – L3 Flood Round Optic
Contact	Mathew Inett mathew.inett@xal.com T: 07498326439

Artin.



Product Image



Product Dimensions / Application Shot

TR – X – (A,B,C)

Description	Suspended magnetic track system
Fixing Type	Suspended
Finish	Black
Attachments / Spec	Suspension kits All kit required for complete installation
Colour Temperature	NA
Colour Rendering Index	NA
Light Source	NA
Dimming Protocol	DALI
Wattage	NA
Lumen Output	NA
Lumens per Watt	NA
IP Rating	20
Notes	Include for all drivers, connections and fixing details necessary for complete working installation
Manufacturer	XAL
Reference	Move It 25 – allow for length as drawn
Contact	Mathew Inett mathew.inett@xal.com T: 07498326439

Artin.



MANUFACTURER / CONTRACTOR NOTES

'A' Denotes 2420mm
'B' Denotes 1220mm
'C' Denotes 620mm

Product Image



Product Dimensions / Application Shot

L29 – (A,B,C)

Description	Suspended profile luminaire with indirect linear LED optic and direct track mounted luminaires.
Fixing Type	Suspended
Finish	Black
Attachments / Spec	Suspension kits All kit required for complete installation
Colour Temperature	2700K
Colour Rendering Index	>90
Light Source	LED
Dimming Protocol	DALI
Wattage	33 w/ 2420mm / 15.2 w/1200mm / 6.2 w/620mm
Lumen Output	3380 lm/ 2420mm / 1790 lm/1200mm / 1310 lm/620mm
Lumens per Watt	117 lm/w
IP Rating	20
Notes	Include for all drivers, connections and fixing details necessary for complete working installation
Manufacturer	XAL
Reference	Move It 25 – Indirect – allow for length as drawn
Contact	Mathew Inett mathew.inett@xal.com T: 07498326439

Artin.



MANUFACTURER / CONTRACTOR NOTES

'A' Denotes 2420mm
'B' Denotes 1220mm
'C' Denotes 620mm

Product Image



Product Dimensions / Application Shot

L30 -(N,M,W)

Description	Magnetic track spotlight
Fixing Type	Ceiling Recessed
Finish	Black
Attachments / Spec	Glare Louvre
Colour Temperature	2700K
Colour Rendering Index	>90
Light Source	LED
Dimming Protocol	DALI
Wattage	11 w
Lumen Output	743 lm
Lumens per Watt	68 lm/w
IP Rating	20
Notes	Include for all drivers, connections and fixing details necessary for complete working installation
Manufacturer	XAL
Reference	Just 45 Move It Spot
Contact	Mathew Inett mathew.inett@xal.com T: 07498326439

Artin.



MANUFACTURER / CONTRACTOR NOTES

‘N’ Denotes 8 degree optic
‘M’ Denotes 21 degree optic
‘W’ Denotes 42 degree optic

Product Image





Product Dimensions / Application Shot

L31A

Description	Ceiling suspended impact resistant linear fitting Basement - Circulation, Changing Rooms
Fixing Type	Suspended. Ceiling rod fixed
Finish	Fixing details in a polished brass finish
Attachments / Spec	Allow for 1no colour sleeve per unit Fixing details TBC Northern Lights
Colour Temperature	2700K – With colour sleeve
Colour Rendering Index	>80
Light Source	LED
Dimming Protocol	DALI (Remote LED Driver)
Wattage	27 w
Lumen Output	2015 lm
Lumens per Watt	75lm/w
IP Rating	64
Notes	Include for all drivers, connections and fixing details necessary for complete working installation
Manufacturer	Luminaire - Encapsulite UK Fixing – Northern Lights
Reference	Luminaire – 24V RD Twin Stick LED – 1525mm - with colour sleeve Fixing – Custom
Contact	Lee Grieve E:lee.grieve@northern-lights.co.uk T: 0789650682



Artin.

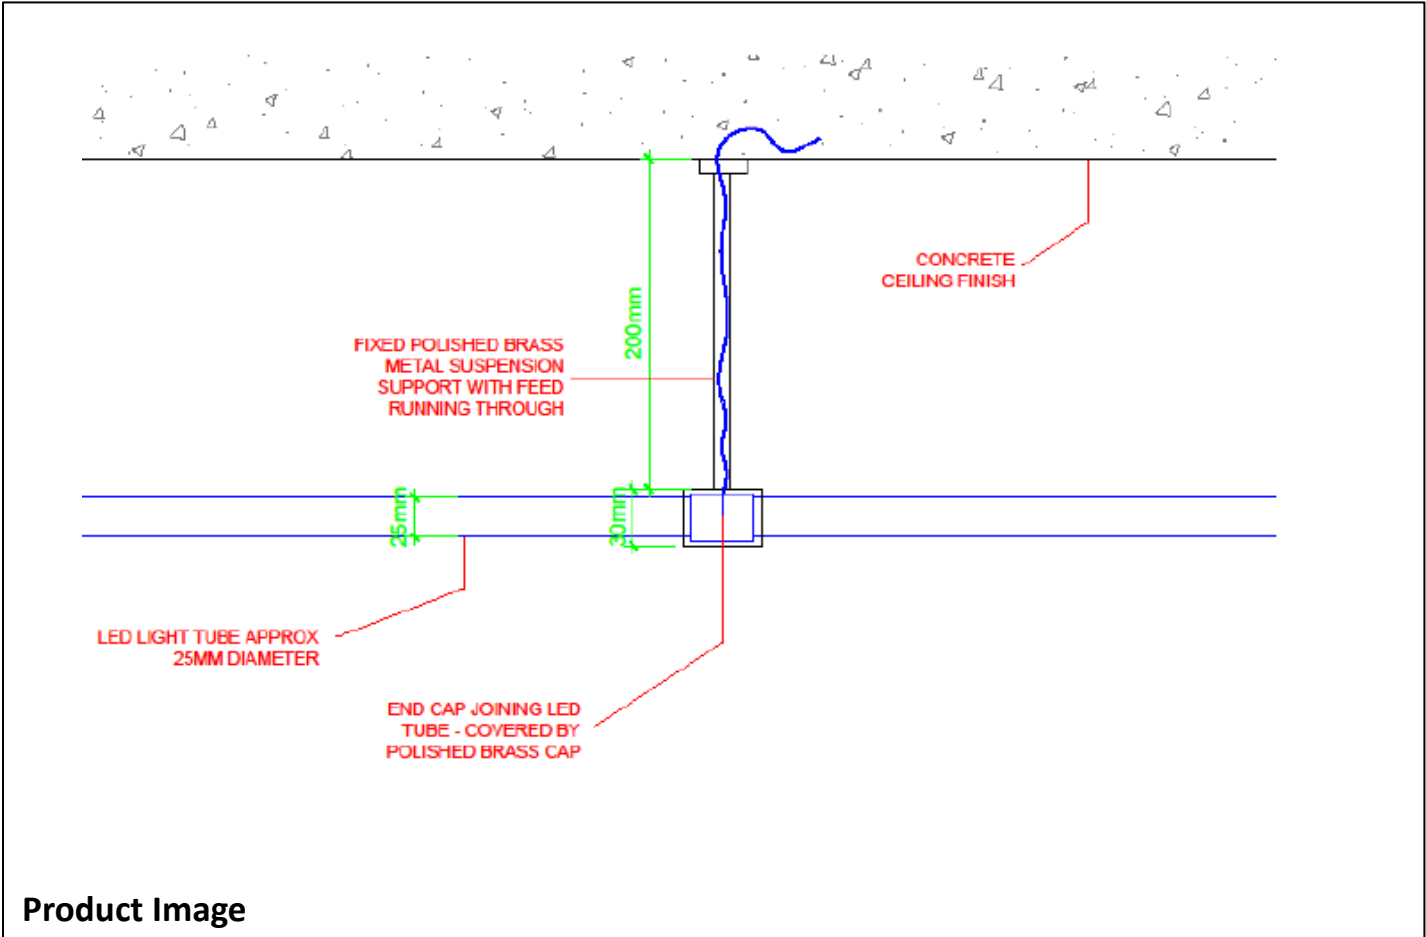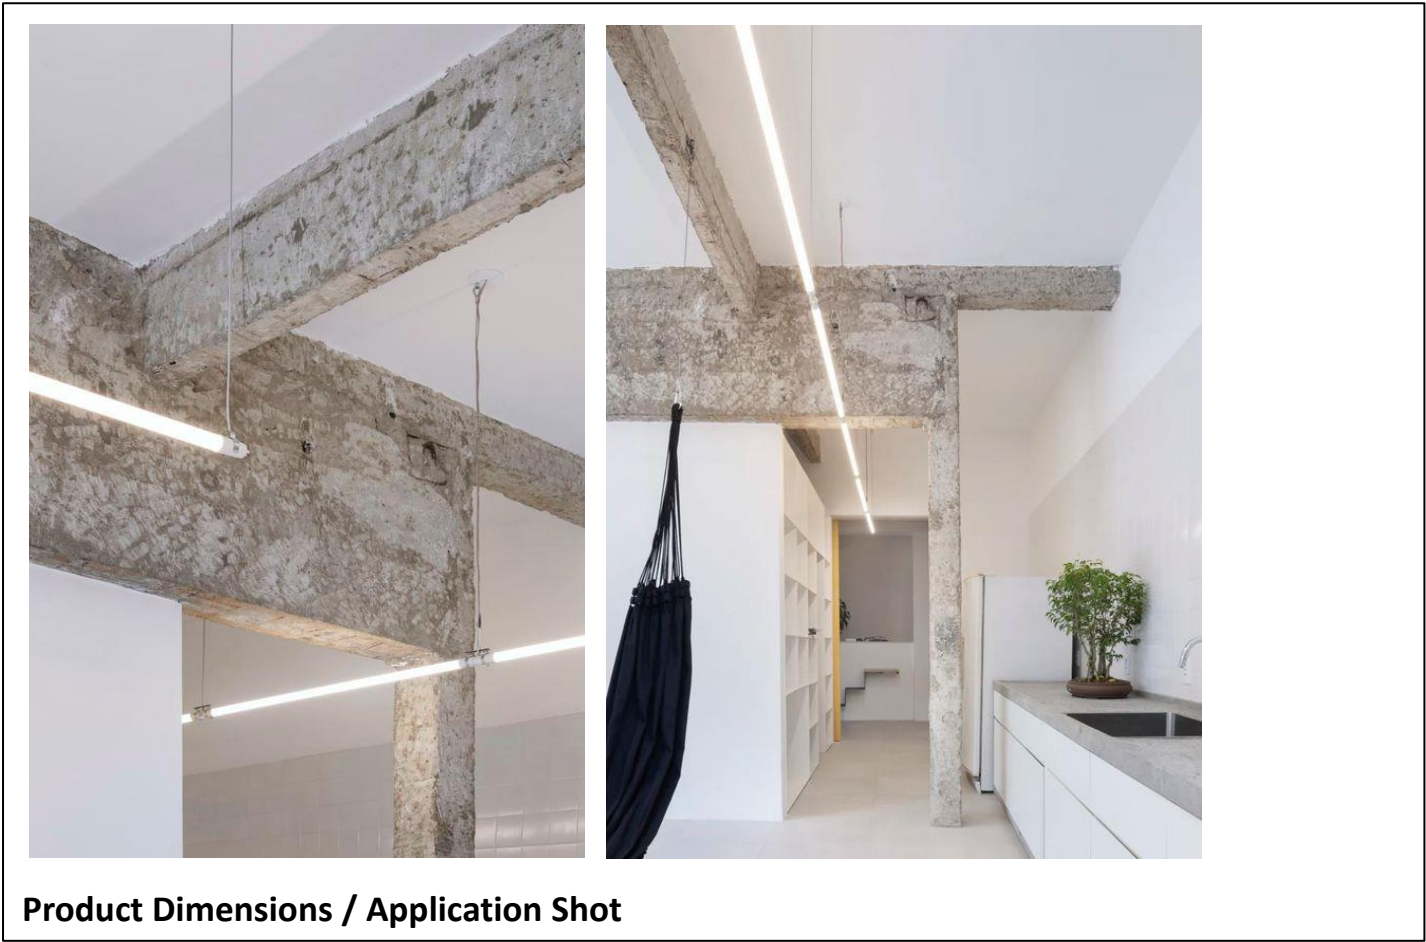

L31B

Description	Ceiling suspended impact resistant linear fitting Basement - Circulation, Changing Rooms
Fixing Type	Suspended. Ceiling rod fixed
Finish	Fixing details in a polished brass finish
Attachments / Spec	Allow for 1no colour sleeve per unit Fixing details TBC Northern Lights
Colour Temperature	2700K – With colour sleeve
Colour Rendering Index	>80
Light Source	LED
Dimming Protocol	DALI (Remote LED Driver)
Wattage	19 w
Lumen Output	1380 lm
Lumens per Watt	73lm/w
IP Rating	64
Notes	Include for all drivers, connections and fixing details necessary for complete working installation
Manufacturer	Luminaire - Encapsulite UK Fixing – Northern Lights
Reference	Luminaire – 24V RD Twin Stick LED – 1025mm - with colour sleeve Fixing – Custom
Contact	Lee Grieve E:lee.grieve@northern-lights.co.uk T: 0789650682



Artin.

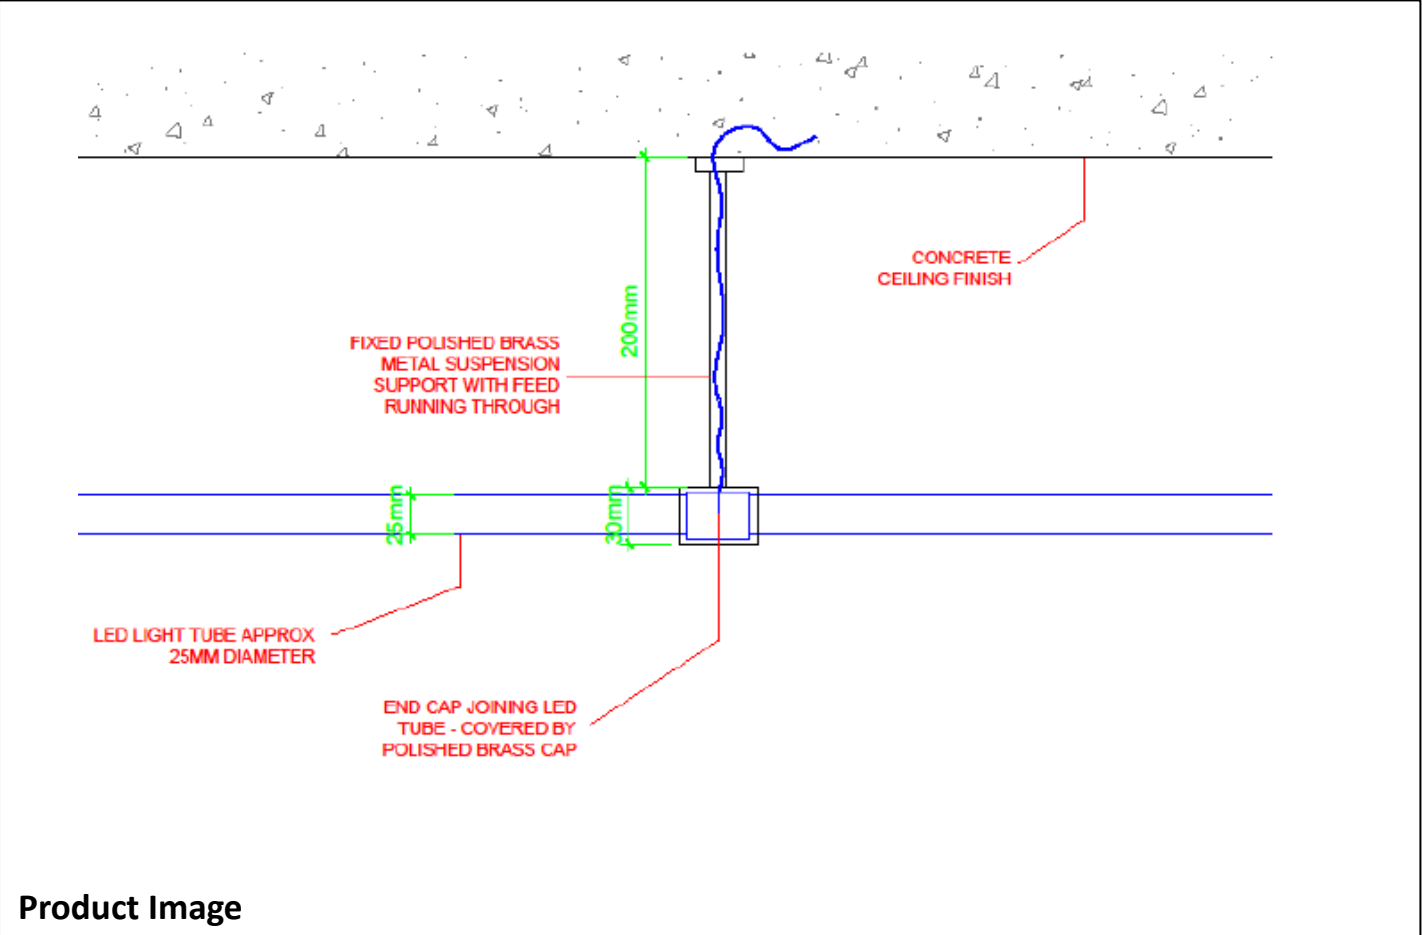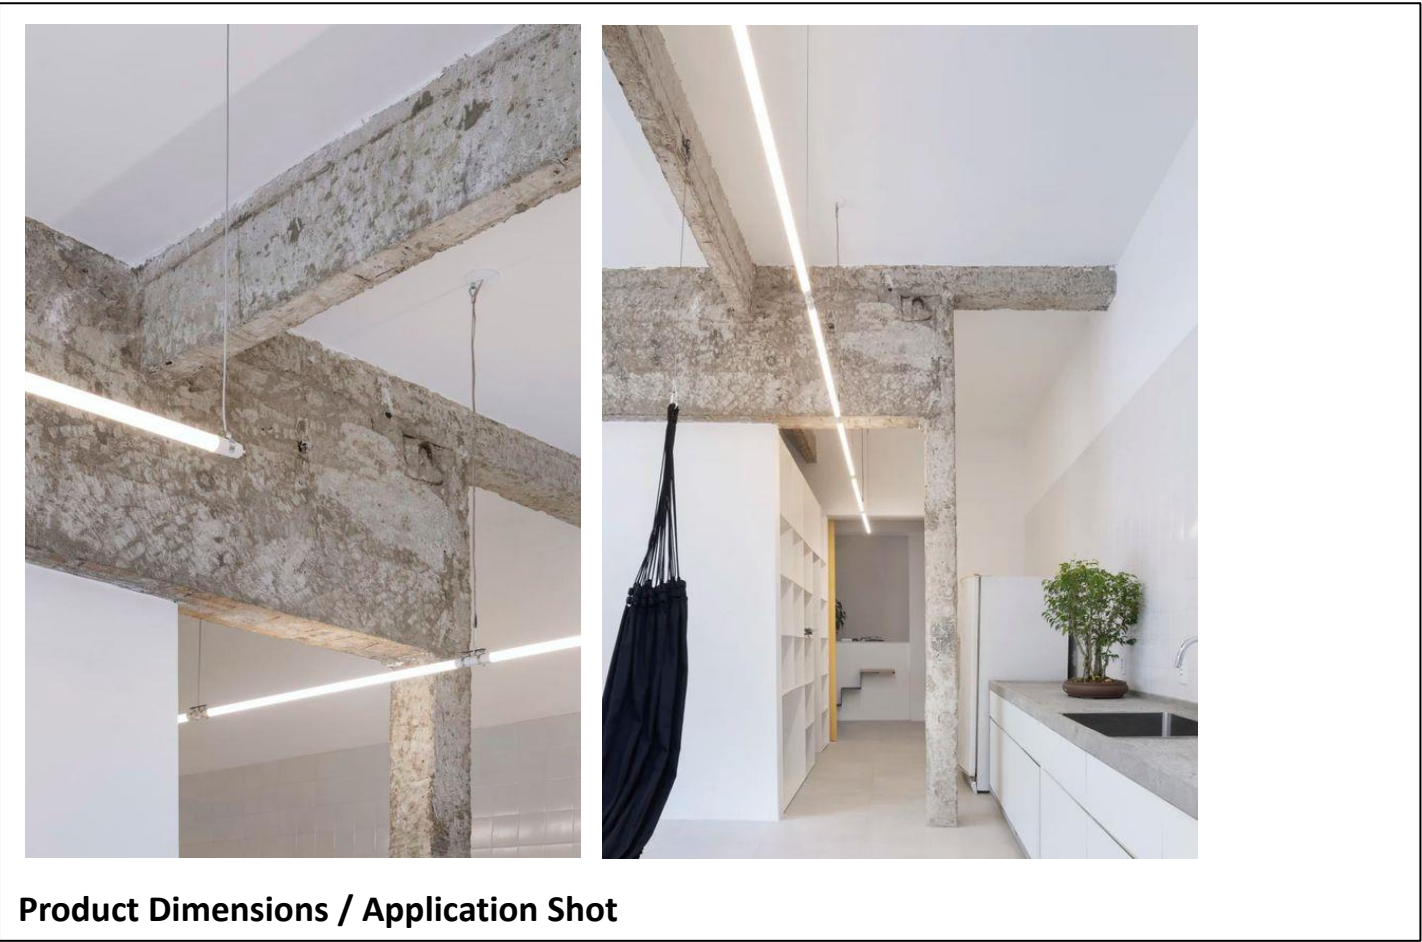

L31C

Description	Ceiling suspended impact resistant linear fitting Basement - Circulation, Changing Rooms
Fixing Type	Suspended. Ceiling rod fixed
Finish	Fixing details in a polished brass finish
Attachments / Spec	Allow for 1no colour sleeve per unit Fixing details TBC Northern Lights
Colour Temperature	2700K – With colour sleeve
Colour Rendering Index	>80
Light Source	LED
Dimming Protocol	DALI (Remote LED Driver)
Wattage	11 w
Lumen Output	610 lm
Lumens per Watt	55lm/w
IP Rating	64
Notes	Include for all drivers, connections and fixing details necessary for complete working installation
Manufacturer	Luminaire - Encapsulite UK Fixing – Northern Lights
Reference	Luminaire – 24V RD Twin Stick LED – 525mm - with colour sleeve Fixing – Custom
Contact	Lee Grieve E:lee.grieve@northern-lights.co.uk T: 0789650682

Artin.

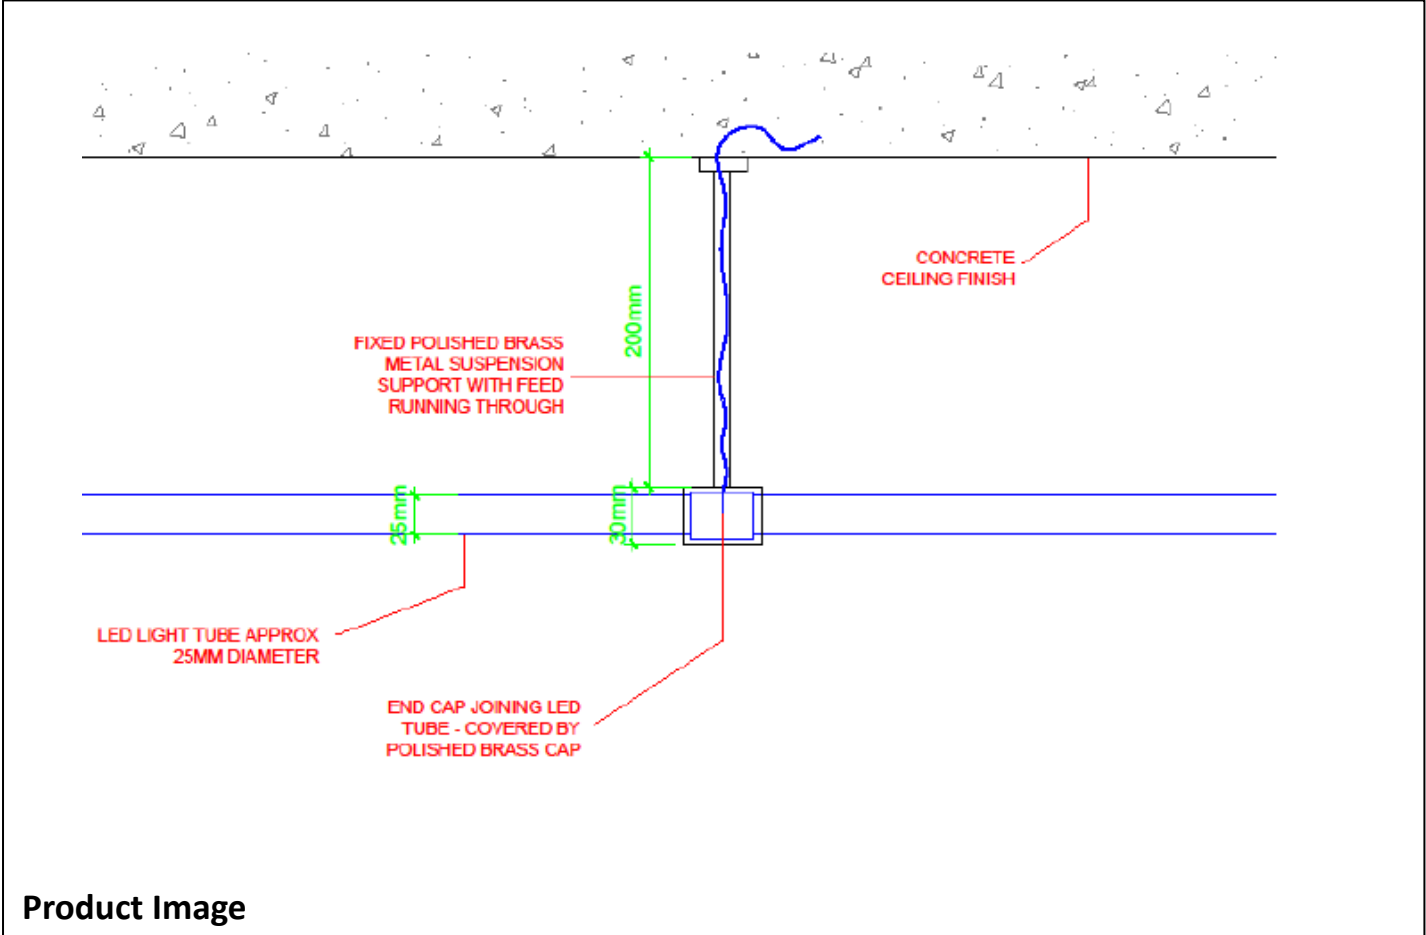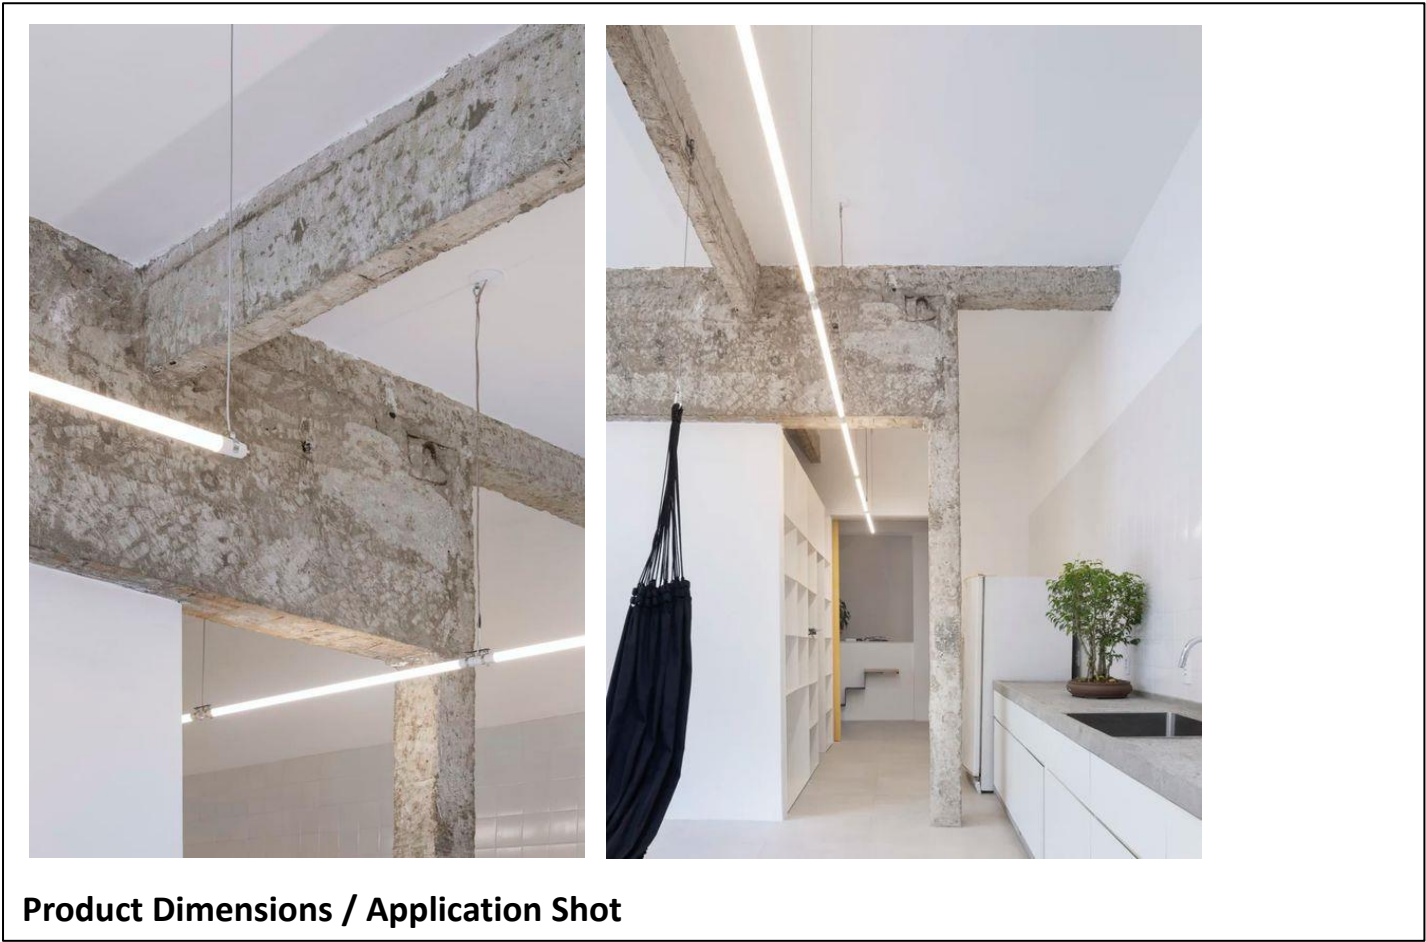

L32-(N,M,W,F)


Description	Surface mounted LED downlight with remote driver
Fixing Type	Surface mounted
Finish	Black
Attachments / Spec	Glare Louvre
Colour Temperature	3000K
Colour Rendering Index	>90
Light Source	LED
Dimming Protocol	DALI
Wattage	13.6 w
Lumen Output	907 lm
Lumens per Watt	67 lm/w
IP Rating	20
Notes	Include for all drivers, connections and fixing details necessary for complete working installation
Manufacturer	Lucent Lighting
Reference	Surface Mini Shallow Height
Contact	Alex Hay E: Alex@lucent-lighting.com T: (0) 7971663060

MANUFACTURER / CONTRACTOR NOTES

‘N’ Denotes 12 degree optic
‘M’ Denotes 24 degree optic
‘W’ Denotes 38 degree optic
‘F’ Denotes 55 degree optic



Product Image

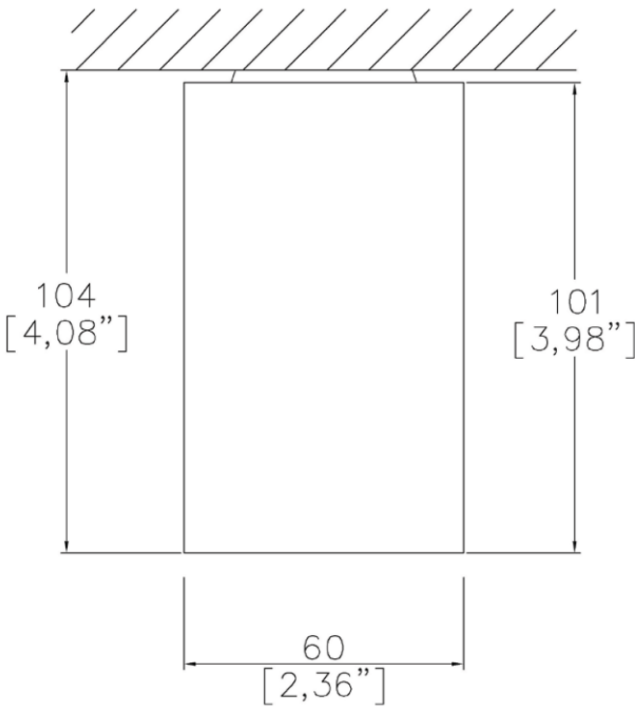


Product Dimensions / Application Shot

L33

Description	Plaster in coffer LED
Fixing Type	Ceiling integrated
Finish	NA
Attachments / Spec	Allow for length as drawn – exact lengths to be confirmed by the architect during construction drawing process
Colour Temperature	2700K
Colour Rendering Index	>90
Light Source	LED
Dimming Protocol	DALI
Wattage	21 w/m
Lumen Output	1355 lm/m
Lumens per Watt	64 lm/w
IP Rating	20
Notes	Include for all drivers, connections and fixing details necessary for complete working installation
Manufacturer	Whitegoods Lighting
Reference	20 Mini Edgeless Cove
Contact	Specilight Associates UK E: uk@specilightassociates.com T: 01656 865 330

Artin.

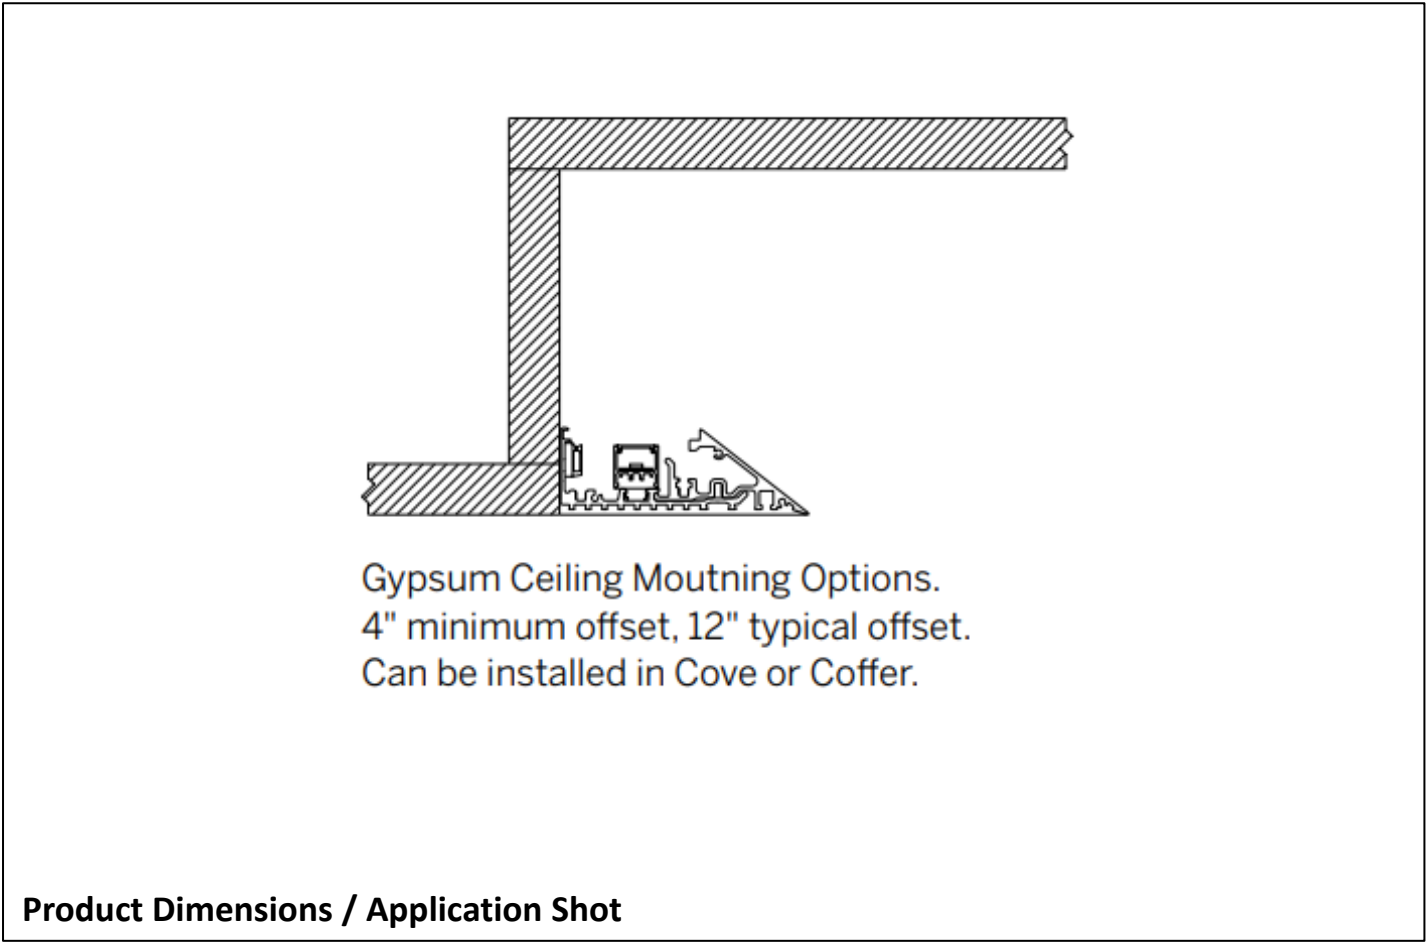

L34

Description	Track mounted specialist planting LED spotlight
Fixing Type	Track mounted
Finish	Black
Attachments / Spec	Glare Louvre 45 degree optic / PPF = 99 Umol / 3.3. Umol/watt Allow for linear track length as drawn
Colour Temperature	4000K
Colour Rendering Index	>85
Light Source	LED
Dimming Protocol	NA
Wattage	30 w
Lumen Output	lm
Lumens per Watt	67 lm/w
IP Rating	20
Notes	Include for all drivers, connections and fixing details necessary for complete working installation
Manufacturer	I Want Plants
Reference	Planter Spot 30
Contact	Richard Rowlands E: Richard@iwantplants.co.uk T: (0) 7768405937

Artin.



Product Image



Product Dimensions / Application Shot

Decorative

D1 - (A,B,C,D)

Description	Decorative pendant
Fixing Type	Suspended
Finish	TBC
Attachments / Spec	
Colour Temperature	2700K
Colour Rendering Index	>90
Light Source	LED
Dimming Protocol	DALI
Wattage	A = 12w B = 18w C = 18w D = 18w
Lumen Output	A = 1389 lm B = 2083 lm C = 2083 lm D = 2083 lm
Lumens per Watt	124 lm/w
IP Rating	20
Notes	Include for all drivers, connections and fixing details necessary for complete working installation
Manufacturer	Vibia
Reference	Flamingo – Various
Contact	James Mansfield – LSE Lighting E: james@lselighting.com T: 01905 22243

Artin.

MANUFACTURER
/ CONTRACTOR
NOTES

A = 1510
B = 1530
C = 1560
D = 1570



Product Image



Product Dimensions / Application Shot


D2

Description	Decorative pendant
Fixing Type	Suspended
Finish	TBC
Attachments / Spec	
Colour Temperature	2700K
Colour Rendering Index	>90
Light Source	LED
Dimming Protocol	DALI
Wattage	13.5 w
Lumen Output	1740 lm
Lumens per Watt	57 lm/w
IP Rating	20
Notes	Include for all drivers, connections and fixing details necessary for complete working installation
Manufacturer	Vibia
Reference	5940
Contact	James Mansfield – LSE Lighting E: james@lselighting.com T: 01905 22243

Artin.



Product Image

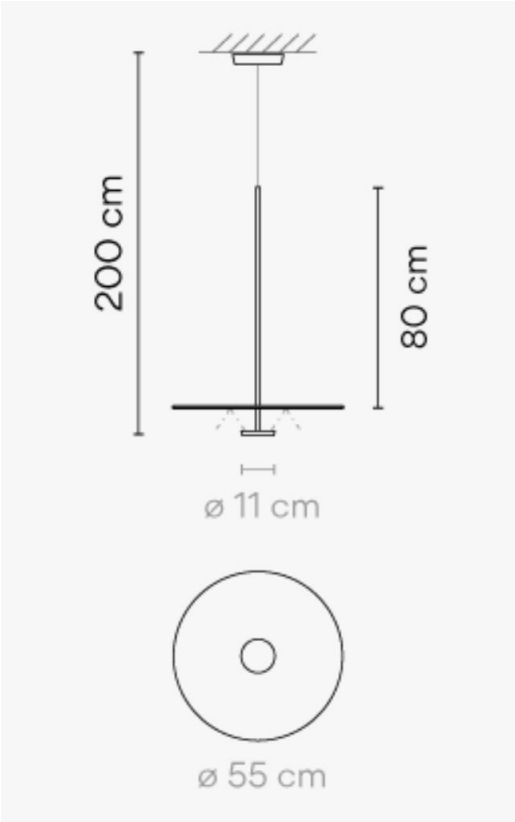

Product Dimensions / Application Shot

D3

Description	Decorative pendant
Fixing Type	Suspended
Finish	TBC
Attachments / Spec	Soraa Lamp SM16GW-07-10D-927-03-S3 60 degree snap filter Honeycomb louvre snap filter
Colour Temperature	2700K
Colour Rendering Index	>80
Light Source	LED
Dimming Protocol	Trailing Edge
Wattage	7.5 w
Lumen Output	390 lm
Lumens per Watt	52 lm/w
IP Rating	20
Notes	Include for all drivers, connections and fixing details necessary for complete working installation
Manufacturer	Pholc
Reference	Apollo 59 Pendant - Aluminium
Contact	Nest Lighting T: 0114 243 3000 E: info@nest.co.uk

Artin.



Product Image



Product Dimensions / Application Shot


D4A

Description	Decorative wall light
Fixing Type	Wall mounted
Finish	TBC
Attachments / Spec	
Colour Temperature	2700K
Colour Rendering Index	>90
Light Source	LED
Dimming Protocol	DALI
Wattage	25 w
Lumen Output	2871 lm
Lumens per Watt	94 lm/w
IP Rating	20
Notes	Include for all drivers, connections and fixing details necessary for complete working installation
Manufacturer	Vibia
Reference	5481
Contact	James Mansfield – LSE Lighting E: james@lselighting.com T: 01905 22243

Artin.



Product Image

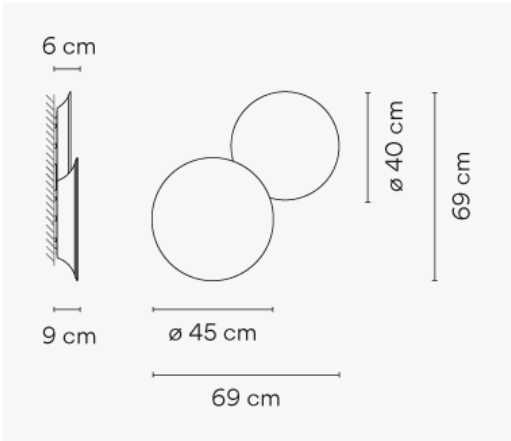

Product Dimensions / Application Shot

D4B

Description	Decorative wall light
Fixing Type	Wall mounted
Finish	TBC
Attachments / Spec	
Colour Temperature	2700K
Colour Rendering Index	>90
Light Source	LED
Dimming Protocol	DALI
Wattage	8.4 w
Lumen Output	952 lm
Lumens per Watt	48 lm/w
IP Rating	20
Notes	Include for all drivers, connections and fixing details necessary for complete working installation
Manufacturer	Vibia
Reference	5470
Contact	James Mansfield – LSE Lighting E: james@lselighting.com T: 01905 22243

Artin.



Product Image



Product Dimensions / Application Shot

D5

Description	Suspended bespoke pendant with 4no glass opal globe lamps
Fixing Type	Suspended
Finish	Matt black metal work 30% reflectance / Opal Glass
Attachments / Spec	E27 lamp holders MASTERVLELED Bulb D5.9-60W E27 927A60FR G UK 929003057799 Philips lighting
Colour Temperature	2700K
Colour Rendering Index	>90
Light Source	LED
Dimming Protocol	Trailing Edge
Wattage	6 w per lamp
Lumen Output	800 lm per lamp
Lumens per Watt	133 lm/w
IP Rating	20
Notes	Include for all drivers, connections and fixing details necessary for complete working installation
Manufacturer	Northern Lights
Reference	Bespoke
Contact	Lee Grieve E:lee.grieve@northern-lights.co.uk T: 0789650682

Artin.



Product Image

BESPOKE DRAWING BY LIGHTING MANUFACTURER

Product Dimensions / Application Shot


D6

Description	Decorative pendant
Fixing Type	Suspended
Finish	Black and Opal
Attachments / Spec	MASTER VLE LEDCandleD3.4-40W E14 B35 927CLG 929003059502 Philips lighting
Colour Temperature	2700K
Colour Rendering Index	>90
Light Source	LED
Dimming Protocol	Trailing Edge
Wattage	5 x 4.5 w
Lumen Output	5 x 470lm
Lumens per Watt	104 lm/w
IP Rating	20
Notes	Include for all drivers, connections and fixing details necessary for complete working installation
Manufacturer	Astep
Reference	Model 2065 – Black shade / opal
Contact	James Mansfield – LSE Lighting E: james@lselighting.com T: 01905 22243

Artin.



Product Image

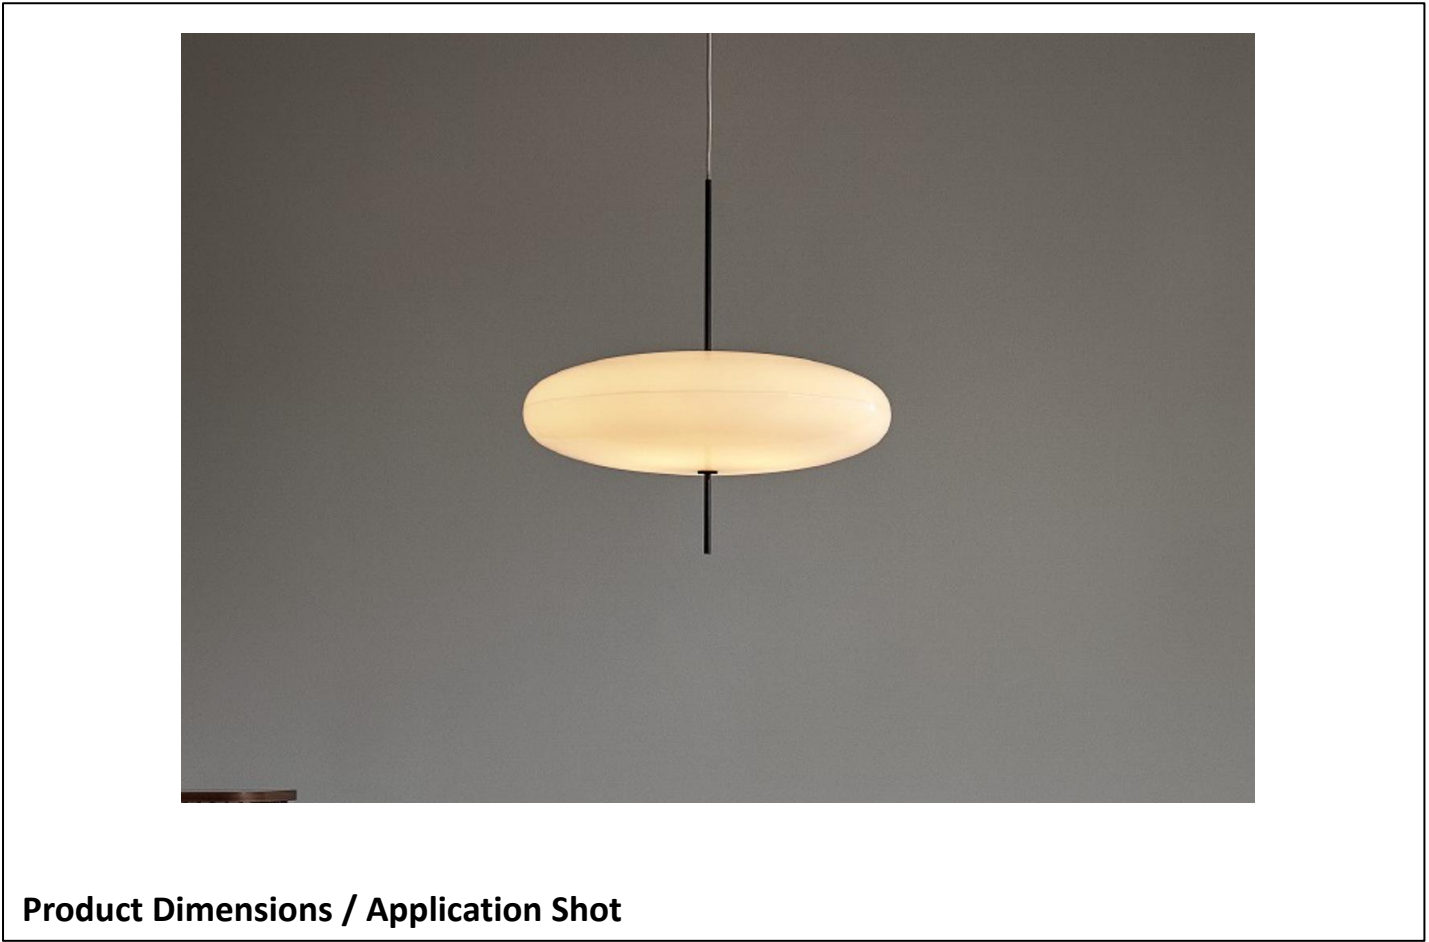

Product Dimensions / Application Shot

D7

Description	Decorative Wall Light
Fixing Type	Wall mounted
Finish	Black / Opal glass
Attachments / Spec	MASTER VLE LEDCandleD3.4-40W E14 B35 927CLG 929003059502 Philips lighting
Colour Temperature	2700K
Colour Rendering Index	>90
Light Source	LED
Dimming Protocol	Trailing Edge
Wattage	4.5 w
Lumen Output	470mlm
Lumens per Watt	104 lm/w
IP Rating	20
Notes	Include for all drivers, connections and fixing details necessary for complete working installation
Manufacturer	New Works
Reference	Karl-Johan Wall Lamp – White Opal Glass
Contact	James Mansfield – LSE Lighting E: james@lselighting.com T: 01905 22243

Artin.



Product Image

Product Dimensions
Ø: 230 x D: 180 mm


Product Dimensions / Application Shot

D8

Description	Decorative Picture Light
Fixing Type	Wall Mounted
Finish	Powder coated Brass Finish – Light finish TBC
Attachments / Spec	7161 - LED Candle Filament Clear 5W Dimmable 2700K SES-E14 - Crompton Lamps Ltd
Colour Temperature	2700K
Colour Rendering Index	>80
Light Source	LED
Dimming Protocol	Trailing Edge
Wattage	15 w
Lumen Output	1410 lm
Lumens per Watt	94 lm/w
IP Rating	20
Notes	Include for all drivers, connections and fixing details necessary for complete working installation
Manufacturer	Northern Lights
Reference	Bespoke
Contact	Lee Grieve E:lee.grieve@northern-lights.co.uk T: 0789650682



Product Image

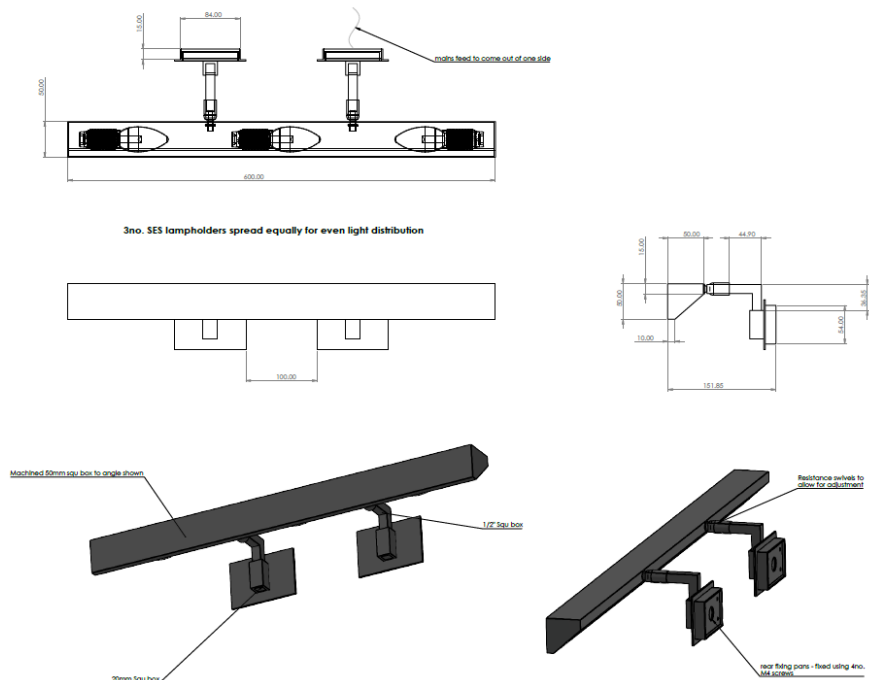

Product Dimensions / Application Shot

D9

Description	Task light
Fixing Type	Desk mounted
Finish	TBC
Attachments / Spec	
Colour Temperature	2700K
Colour Rendering Index	>90
Light Source	LED
Dimming Protocol	NA
Wattage	6 w
Lumen Output	255 lm
Lumens per Watt	42 lm/w
IP Rating	20
Notes	Include for all drivers, connections and fixing details necessary for complete working installation
Manufacturer	Nuura
Reference	Blossi Table Lamp – Black / opal
Contact	Nest Lighting T: 0114 243 3000 E: info@nest.co.uk

Artin.



Product Image




Product Dimensions / Application Shot

D9

Description	Task light
Fixing Type	Desk mounted
Finish	TBC
Attachments / Spec	
Colour Temperature	2700K
Colour Rendering Index	>90
Light Source	LED
Dimming Protocol	NA
Wattage	3 w
Lumen Output	104 lm
Lumens per Watt	34 lm/w
IP Rating	20
Notes	Include for all drivers, connections and fixing details necessary for complete working installation
Manufacturer	&Tradition
Reference	Flower Pot VP9
Contact	Nest Lighting T: 0114 243 3000 E: info@nest.co.uk

Artin.

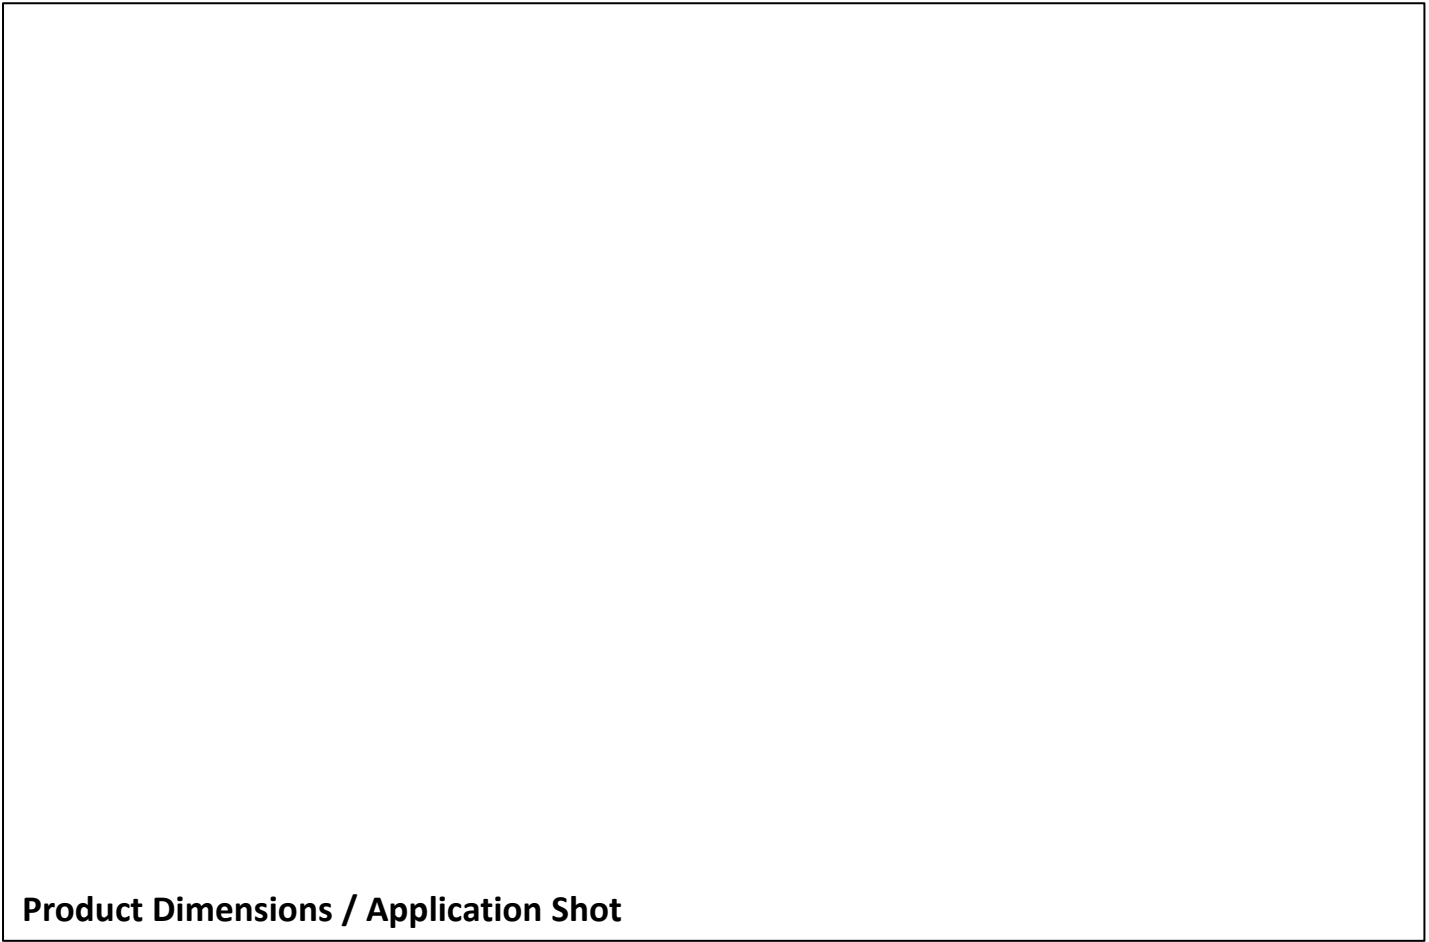


D10

Description	Floor lamp
Fixing Type	Free standing
Finish	TBC
Attachments / Spec	5-amp plug
Colour Temperature	2700K
Colour Rendering Index	>90
Light Source	LED
Dimming Protocol	Trailing Edge
Wattage	8.2 w
Lumen Output	913 lm
Lumens per Watt	111 lm/w
IP Rating	20
Notes	Include for all drivers, connections and fixing details necessary for complete working installation
Manufacturer	Marset
Reference	Theia Floor Lamp
Contact	James Mansfield – LSE Lighting E: james@lselighting.com T: 01905 22243

Artin.



Product Image

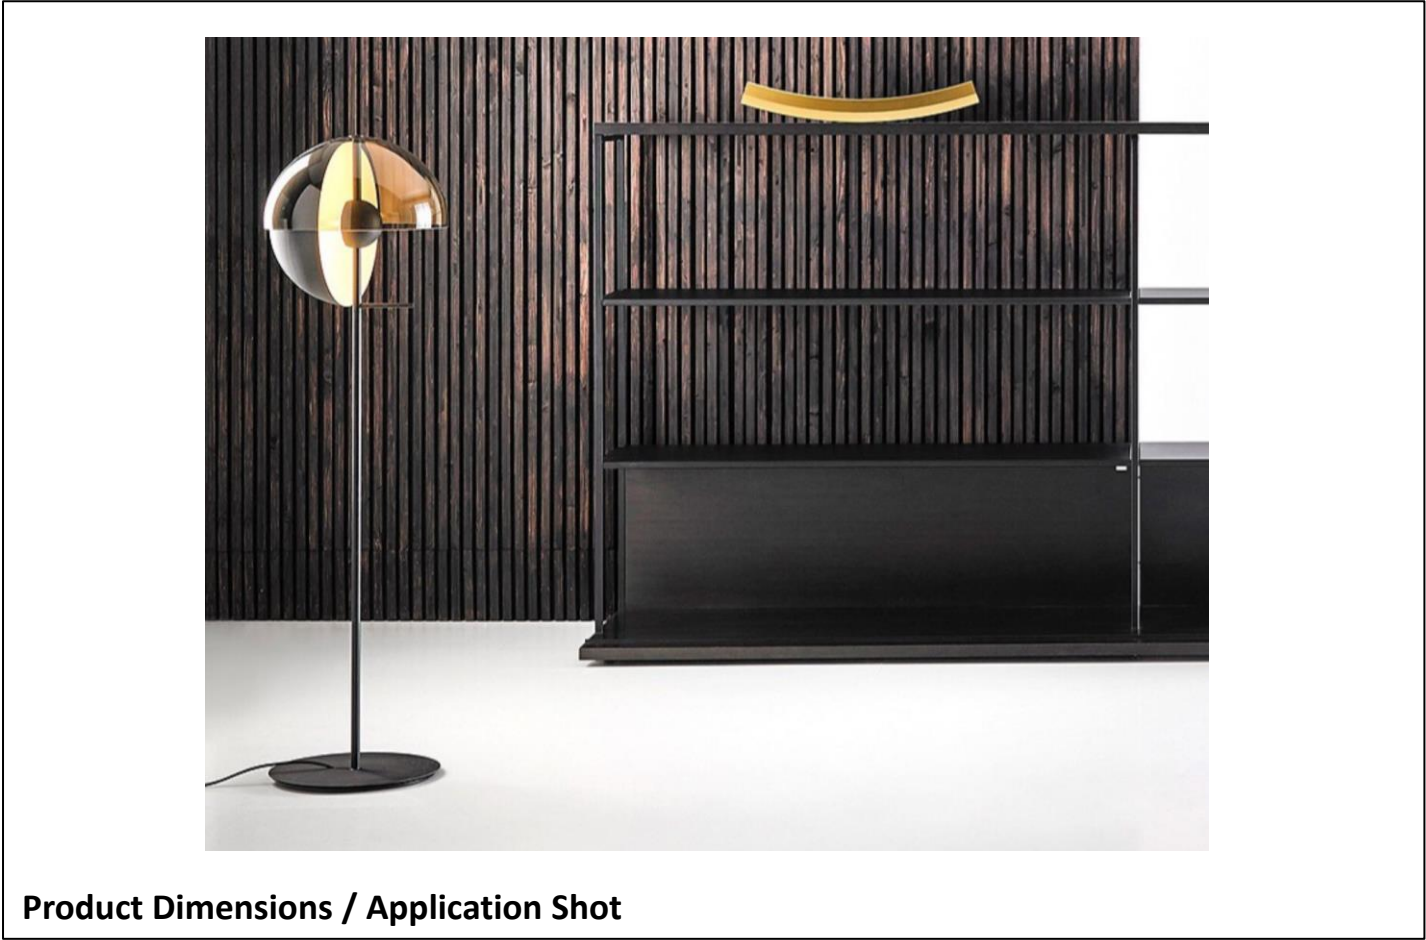

Product Dimensions / Application Shot


D11

Description	Shower room wall lights
Fixing Type	Wall mounted
Finish	TBC
Attachments / Spec	
Colour Temperature	2700K
Colour Rendering Index	>90
Light Source	LED
Dimming Protocol	DALI
Wattage	21 w
Lumen Output	2388 lm
Lumens per Watt	91 lm/w
IP Rating	20
Notes	Include for all drivers, connections and fixing details necessary for complete working installation
Manufacturer	Vibia
Reference	5485 - 73
Contact	James Mansfield – LSE Lighting E: james@lselighting.com T: 01905 22243

Artin.



Product Image

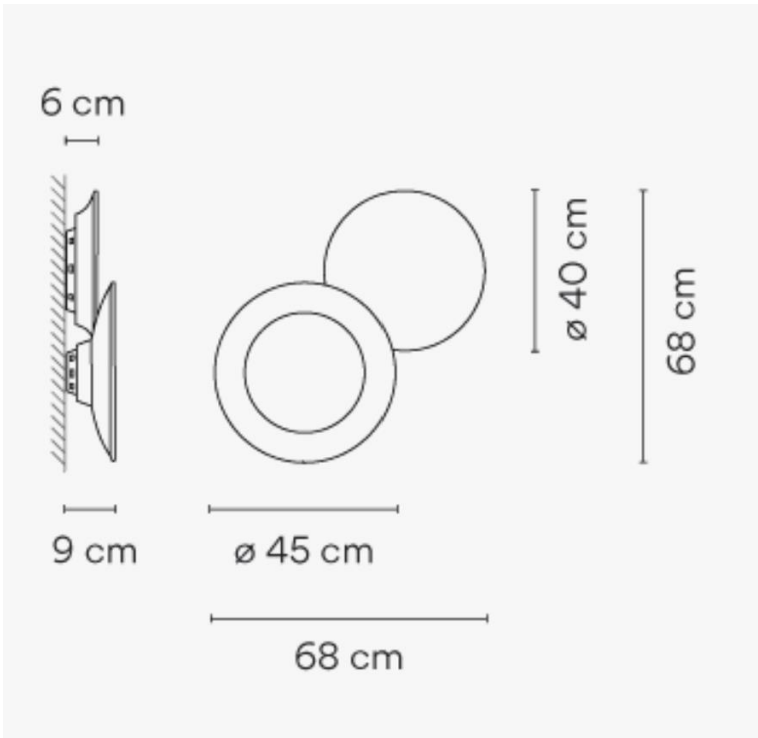

Product Dimensions / Application Shot

D12

Description	Changing rooms feature light installation
Fixing Type	Ceiling mounted
Finish	TBC
Attachments / Spec	
Colour Temperature	2700K
Colour Rendering Index	>90
Light Source	LED
Dimming Protocol	Trailing Edge
Wattage	14 w/m
Lumen Output	1200 lm/m
Lumens per Watt	85 lm/m
IP Rating	20
Notes	Include for all drivers, connections and fixing details necessary for complete working installation
Manufacturer	Northern Lights
Reference	Bespoke
Contact	Lee Grieve E:lee.grieve@northern-lights.co.uk T: 0789650682

Artin.



Product Image

Product Dimensions / Application Shot


D13

Description	Meeting rooms chandeliers – 1200mm
Fixing Type	Ceiling mounted
Finish	Black / Brass
Attachments / Spec	E27 – Philips lamp 1500lm per lamp MASTER VLE LEDBulbD11.2-100W E27 927 A60FRG 929003058502 Philips lighting
Colour Temperature	2700K
Colour Rendering Index	>90
Light Source	LED
Dimming Protocol	Trailing Edge
Wattage	11.2
Lumen Output	1521 lm
Lumens per Watt	135 lm/w
IP Rating	20
Notes	Include for all drivers, connections and fixing details necessary for complete working installation
Manufacturer	Northern Lights
Reference	Bespoke
Contact	Lee Grieve E:lee.grieve@northern-lights.co.uk T: 0789650682

Artin.



Product Image

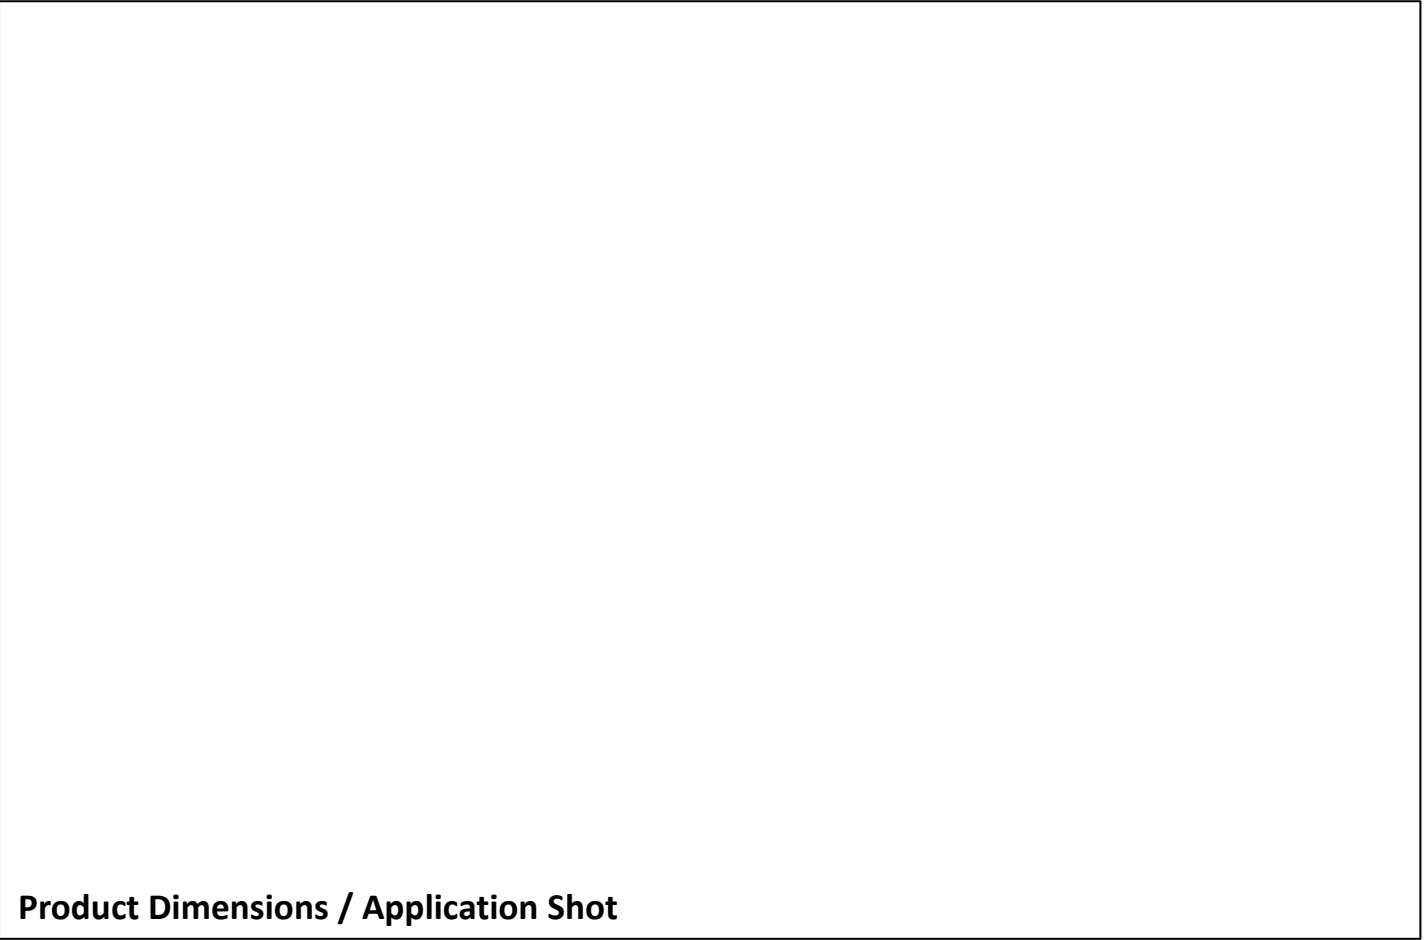

Product Dimensions / Application Shot

D14

Description	Task light
Fixing Type	Desk mounted
Finish	TBC
Attachments / Spec	MASTER VLE LEDCandleD3.4-40W E14 B35 927CLG 929003059502 Philips lighting
Colour Temperature	2700K
Colour Rendering Index	>90
Light Source	LED
Dimming Protocol	Trailing Edge
Wattage	3.4 w
Lumen Output	470 lm
Lumens per Watt	138 lm/w
IP Rating	20
Notes	Include for all drivers, connections and fixing details necessary for complete working installation
Manufacturer	&Tradition
Reference	Bellevue AJ11
Contact	Nest Lighting T: 0114 243 3000 E: info@nest.co.uk

Artin.



Product Image

Product Dimensions / Application Shot

D15

Description	Floor lamp
Fixing Type	Free standing
Finish	TBC
Attachments / Spec	5-amp plug E26 dimmable filament lamp required
Colour Temperature	2700K
Colour Rendering Index	>90
Light Source	LED
Dimming Protocol	Trailing Edge
Wattage	11.2
Lumen Output	1521 lm
Lumens per Watt	135 lm/w
IP Rating	20
Notes	Include for all drivers, connections and fixing details necessary for complete working installation
Manufacturer	Santa & Cole
Reference	TMD
Contact	James Mansfield – LSE Lighting E: james@lselighting.com T: 01905 22243

Artin.



Product Image

Product Dimensions / Application Shot


D16

Description	Decorative pendant
Fixing Type	Suspended
Finish	Monochrome
Attachments / Spec	MASTER VLE LEDCandleD3.4-40W E14 B35 927CLG 929003059502 Philips lighting
Colour Temperature	2700K
Colour Rendering Index	>90
Light Source	LED
Dimming Protocol	Trailing Edge
Wattage	4.5 w
Lumen Output	470mlm
Lumens per Watt	104 lm/w
IP Rating	20
Notes	Include for all drivers, connections and fixing details necessary for complete working installation
Manufacturer	Louis Poulsen
Reference	PH5 Mini Monochrome
Contact	James Mansfield – LSE Lighting E: james@lselighting.com T: 01905 22243

Artin.



Product Image

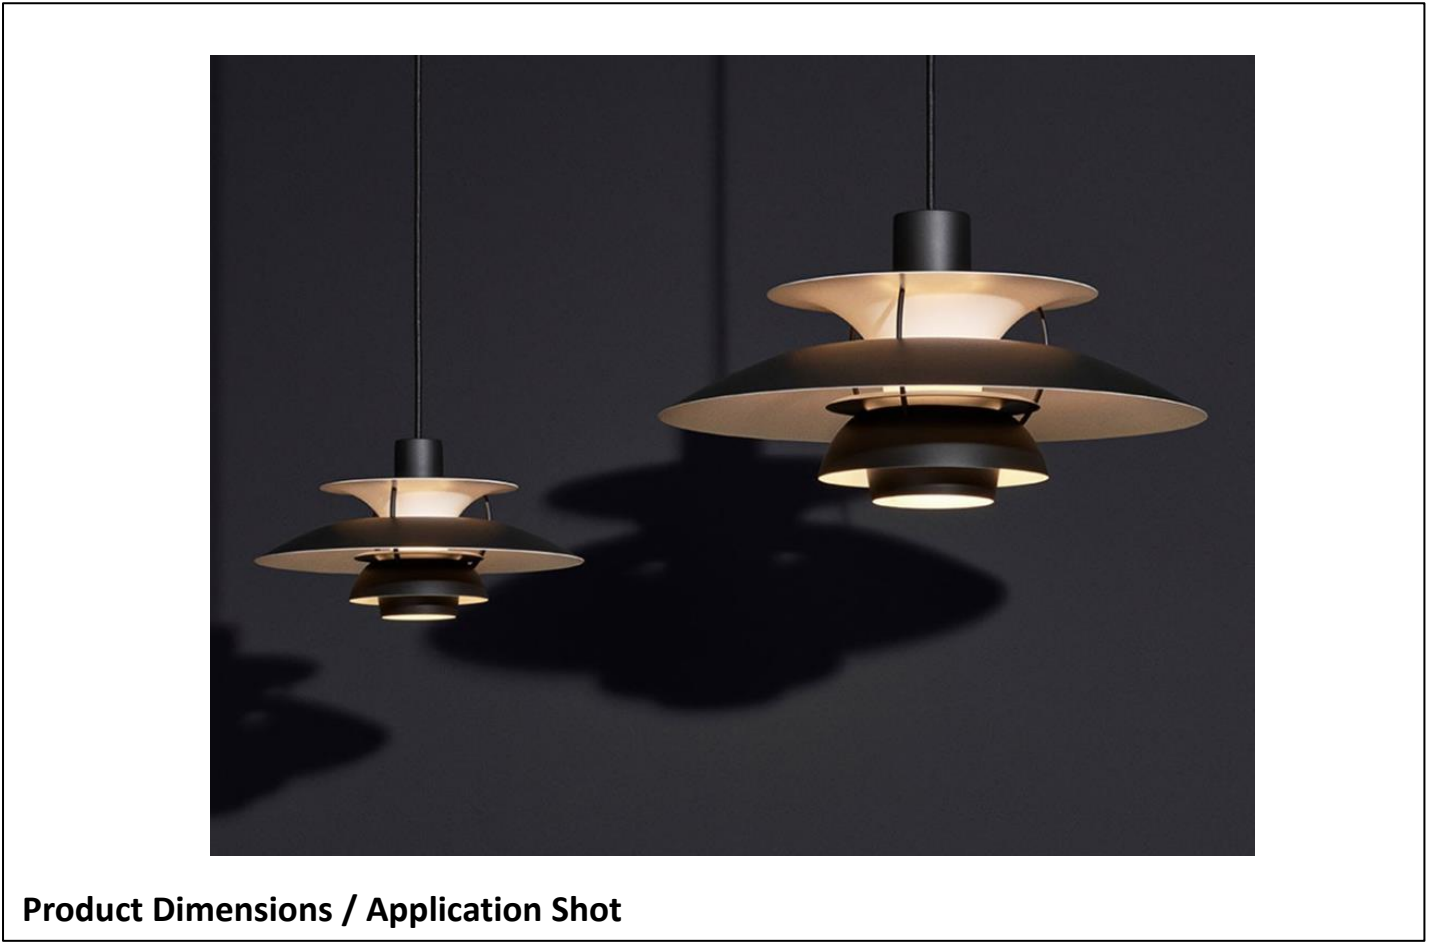


Product Dimensions / Application Shot

Exterior

Description	External recessed canopy downlight with anti glare louvre
Fixing Type	Recessed
Finish	Black
Attachments / Spec	Honeycomb louvre 55 degree
Colour Temperature	2700K
Colour Rendering Index	>90
Light Source	LED
Dimming Protocol	DALI
Wattage	13.6 w
Lumen Output	1064 lm
Lumens per Watt	78 lm/w
IP Rating	65
Notes	Include for all drivers, connections and fixing details necessary for complete working installation
Manufacturer	Lucent Lighting
Reference	Mini Trim IP65
Contact	Alex Hay E: Alex@lucent-lighting.com T: (0) 7971663060



Product Image

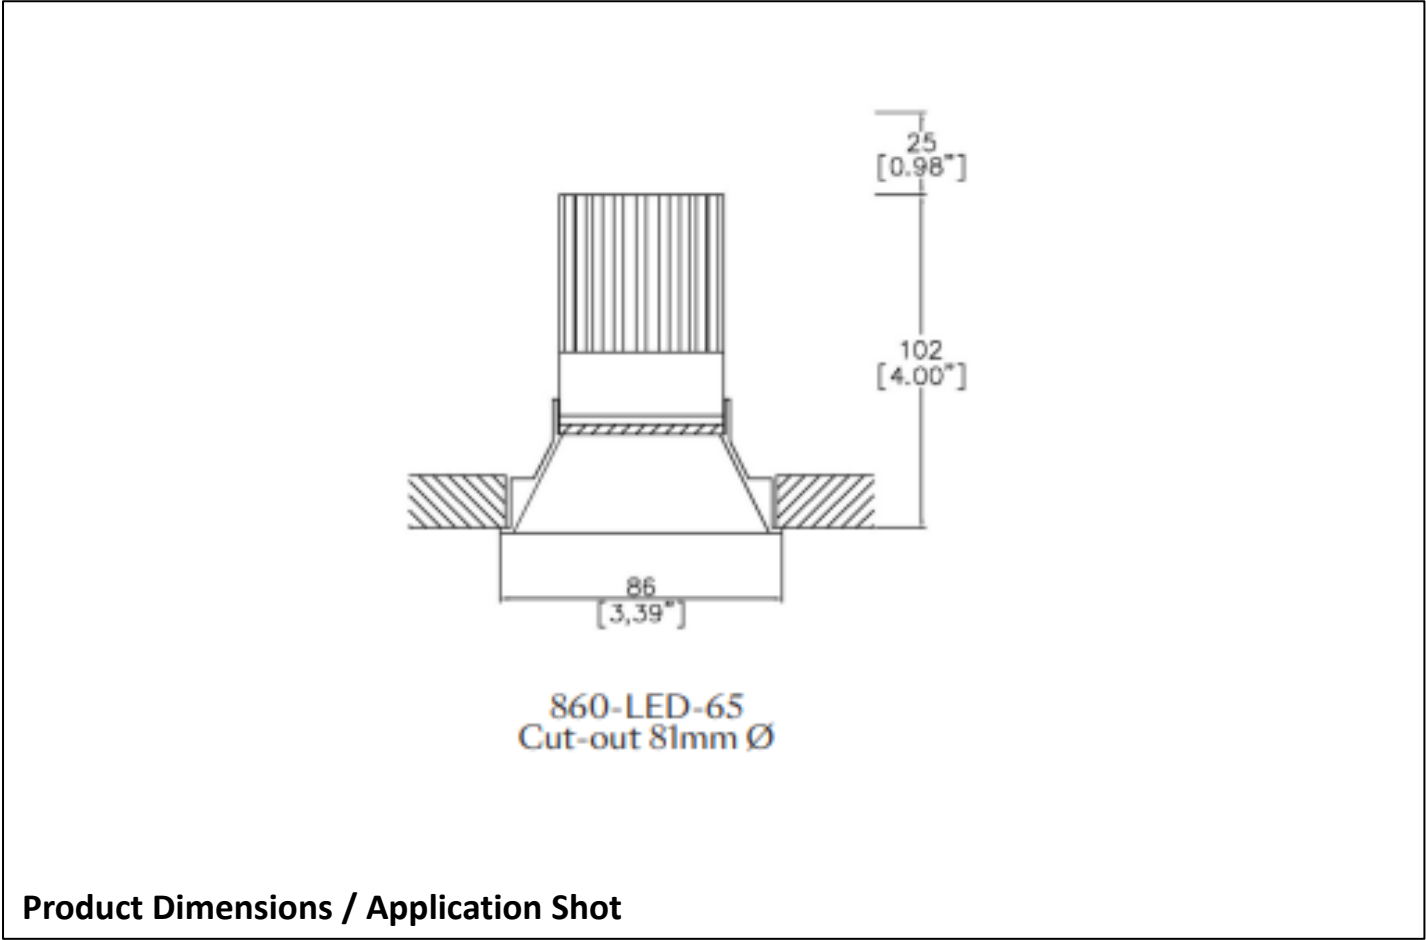


Product Dimensions / Application Shot

X3

Description	Flexible LED profile with homogenous lighting effect – Undercroft
Fixing Type	Detail fixed
Finish	NA
Attachments / Spec	Fixing channel as required Main Contractor to confirm preferred cable entry position and exact linear lengths onsite before ordering equipment
Colour Temperature	2700K
Colour Rendering Index	>90
Light Source	LED
Dimming Protocol	DALI
Wattage	6 w/m
Lumen Output	500 lm/m
Lumens per Watt	50 lm/w
IP Rating	67
Notes	Include for all drivers, connections and fixing details necessary for complete working installation
Manufacturer	Tryka
Reference	Continuity T – Made to measure
Contact	Colin Gawne E: Colin.Gawne@tryka.com T: 07890110951

Artin.



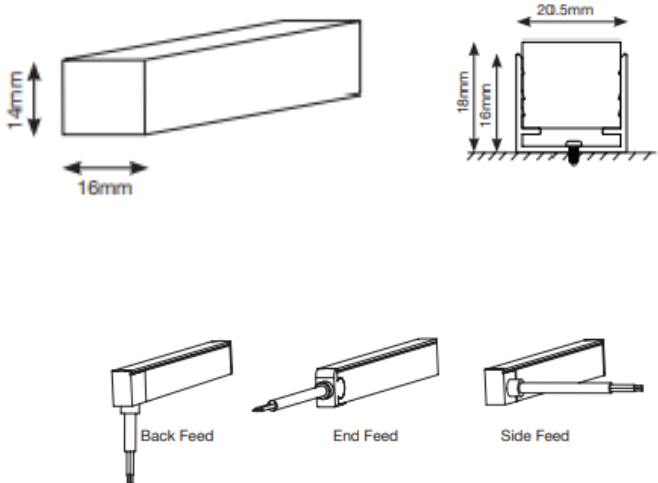

Product Image




Product Dimensions / Application Shot

X5 (E)

Description	Ground fixed LED bollard with 180 degree illumination
Fixing Type	Ground mounted
Finish	Bronze finish – RAL TBC
Attachments / Spec	Allow for inground recess kit and associated IP cables and glands 'E' denotes with 3 hr integral emergency battery pack
Colour Temperature	2700K
Colour Rendering Index	>90
Light Source	LED
Dimming Protocol	DALI
Wattage	11 w
Lumen Output	161 lm
Lumens per Watt	15 lm/w
IP Rating	65
Notes	Include for all drivers, connections and fixing details necessary for complete working installation
Manufacturer	Erco
Reference	Castor Bollard Luminaire – 180 degree
Contact	Steve Redhead E: s.redhead@erco.com T: +44 (0) 7860 266015


Artin.

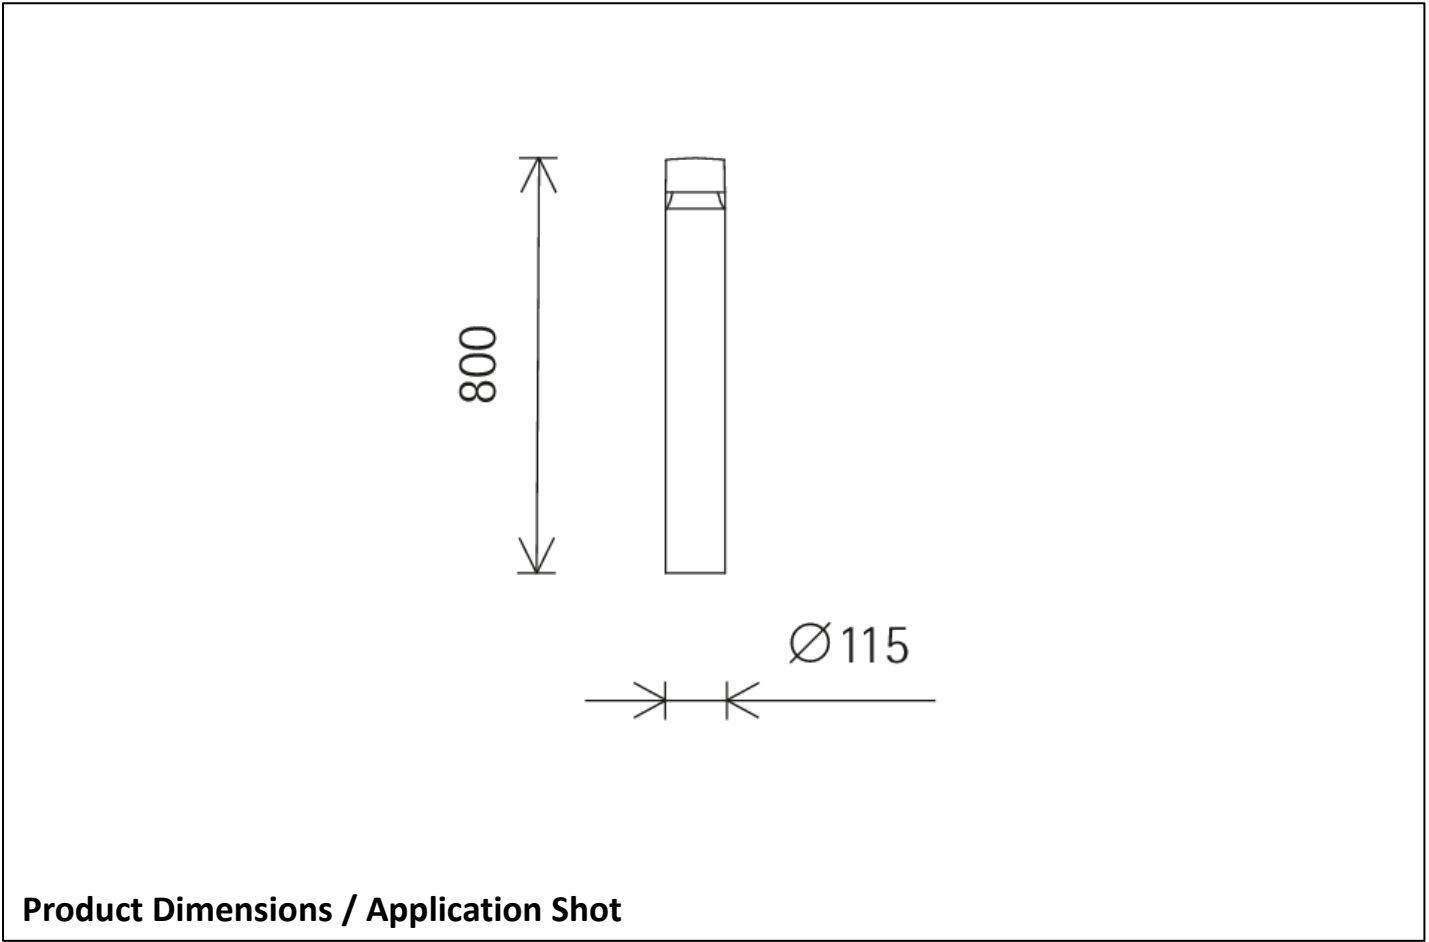

X7

Description	Column mounted downlight
Fixing Type	Wall mounted
Finish	TBC
Attachments / Spec	12 degree beam Honeycomb louvre
Colour Temperature	2700K
Colour Rendering Index	>93
Light Source	LED
Dimming Protocol	DALI
Wattage	8.4w
Lumen Output	653 lm
Lumens per Watt	65 lm/w
IP Rating	66
Notes	Include for all drivers, connections and fixing details necessary for complete working installation
Manufacturer	Light Graphix
Reference	LD10235
Contact	Dylan Parry E: dylan@lightgraphix.biz M: 07340399180

Artin.

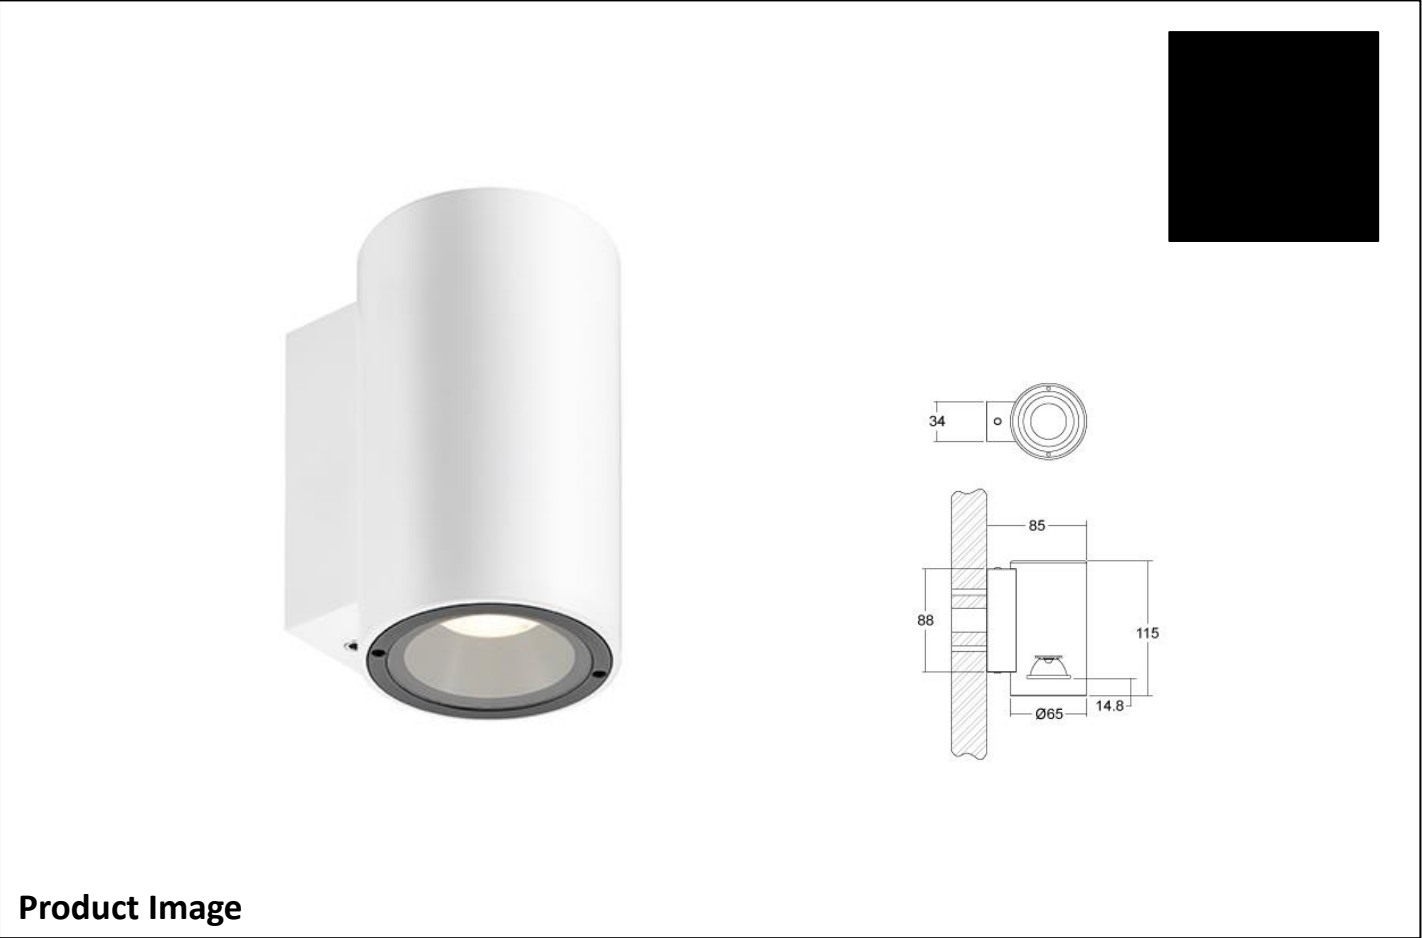

Product Image




Product Dimensions / Application Shot

X7W

Description	Column mounted downlight
Fixing Type	Wall mounted
Finish	TBC
Attachments / Spec	55 degree beam Honeycomb louvre
Colour Temperature	2700K
Colour Rendering Index	>93
Light Source	LED
Dimming Protocol	DALI
Wattage	8.4w
Lumen Output	653 lm
Lumens per Watt	65 lm/w
IP Rating	66
Notes	Include for all drivers, connections and fixing details necessary for complete working installation
Manufacturer	Light Graphix
Reference	LD10235
Contact	Dylan Parry E: dylan@lightgraphix.biz M: 07340399180


Artin.

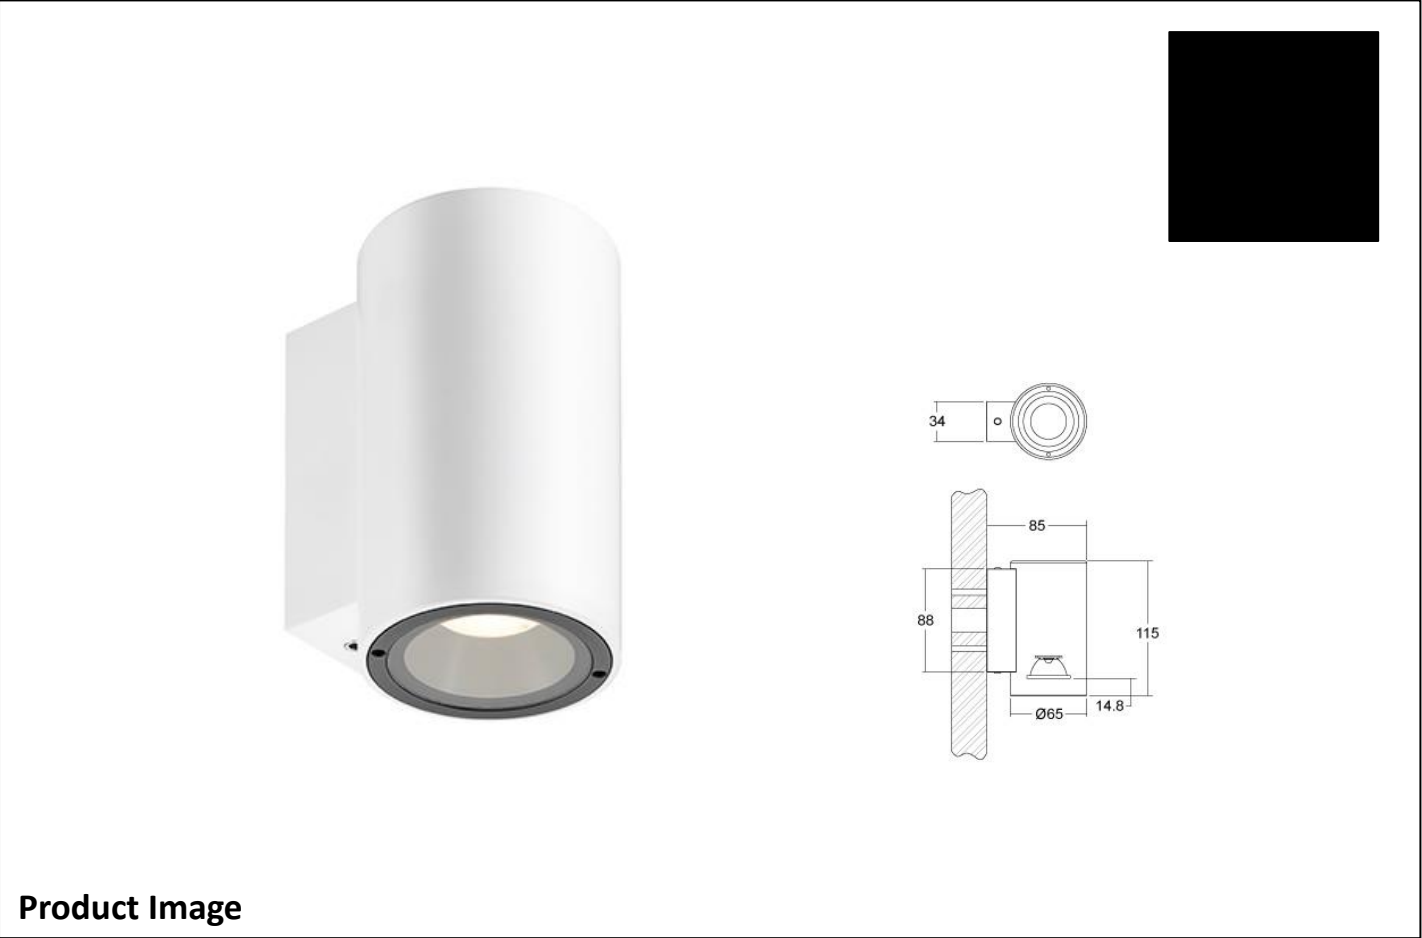

X8

Description	Surface mounted external projector
Fixing Type	Surface mounted
Finish	TBC
Attachments / Spec	
Colour Temperature	2700K
Colour Rendering Index	>90
Light Source	LED
Dimming Protocol	DALI
Wattage	81 w
Lumen Output	5881 lm
Lumens per Watt	73 lm/w
IP Rating	65
Notes	Include for all drivers, connections and fixing details necessary for complete working installation
Manufacturer	Erco
Reference	Lightscan Projector - Flood
Contact	Steve Redhead E: s.redhead@erco.com T: +44 (0) 7860 266015

Artin.

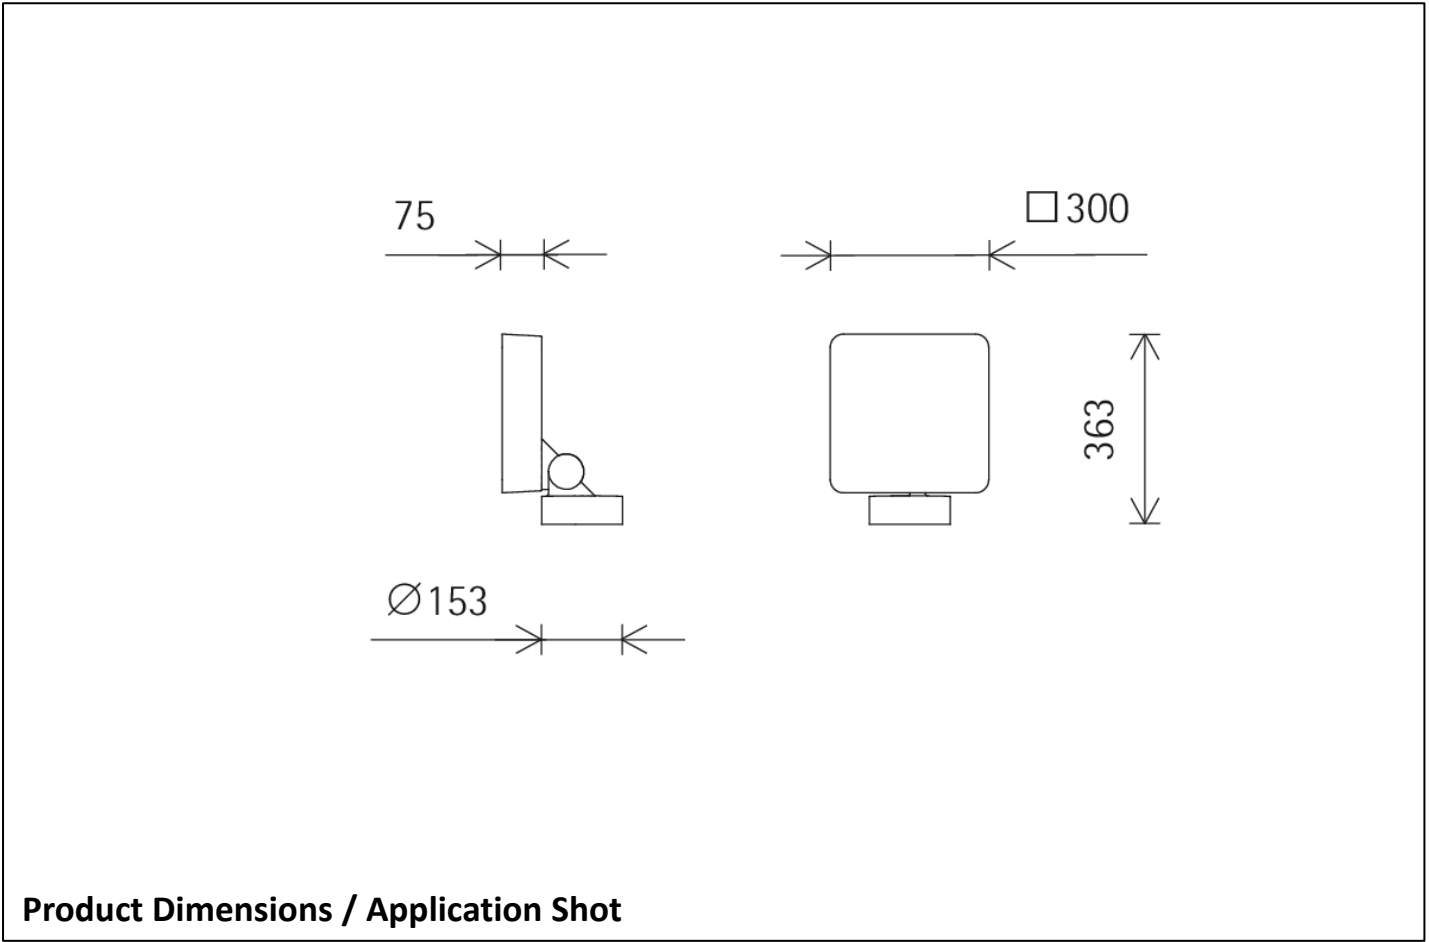


X9

Description	Surface mounted LED downlight
Fixing Type	Ceiling mounted
Finish	TBC
Attachments / Spec	12 degree beam Honeycomb louvre
Colour Temperature	2700K
Colour Rendering Index	>93
Light Source	LED
Dimming Protocol	DALI
Wattage	2.4w
Lumen Output	177 lm
Lumens per Watt	77 lm/w
IP Rating	66
Notes	Include for all drivers, connections and fixing details necessary for complete working installation
Manufacturer	Light Graphix
Reference	LD95
Contact	Dylan Parry E: dylan@lightgraphix.biz M: 07340399180

Artin.



Product Image

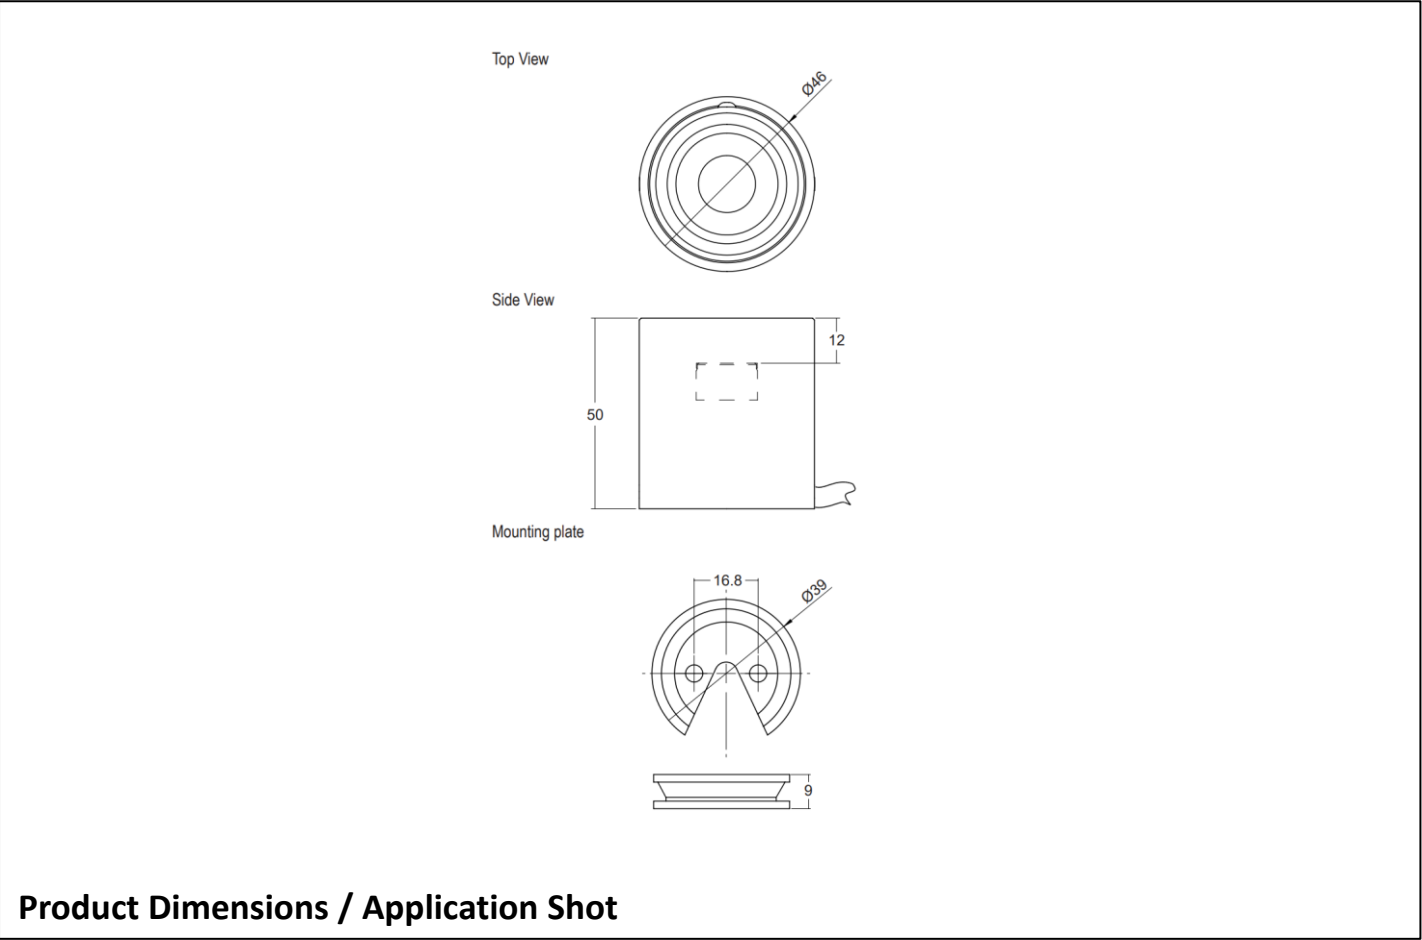

Product Dimensions / Application Shot


X10

Description	Surface mounted downlight
Fixing Type	Wall mounted
Finish	TBC
Attachments / Spec	54 degree beam Glare shield
Colour Temperature	2700K
Colour Rendering Index	>93
Light Source	LED
Dimming Protocol	DALI
Wattage	8.4w
Lumen Output	653 lm
Lumens per Watt	65 lm/w
IP Rating	66
Notes	Include for all drivers, connections and fixing details necessary for complete working installation
Manufacturer	Light Graphix
Reference	LD10235
Contact	Dylan Parry E: dylan@lightgraphix.biz M: 07340399180

Artin.



Product Image

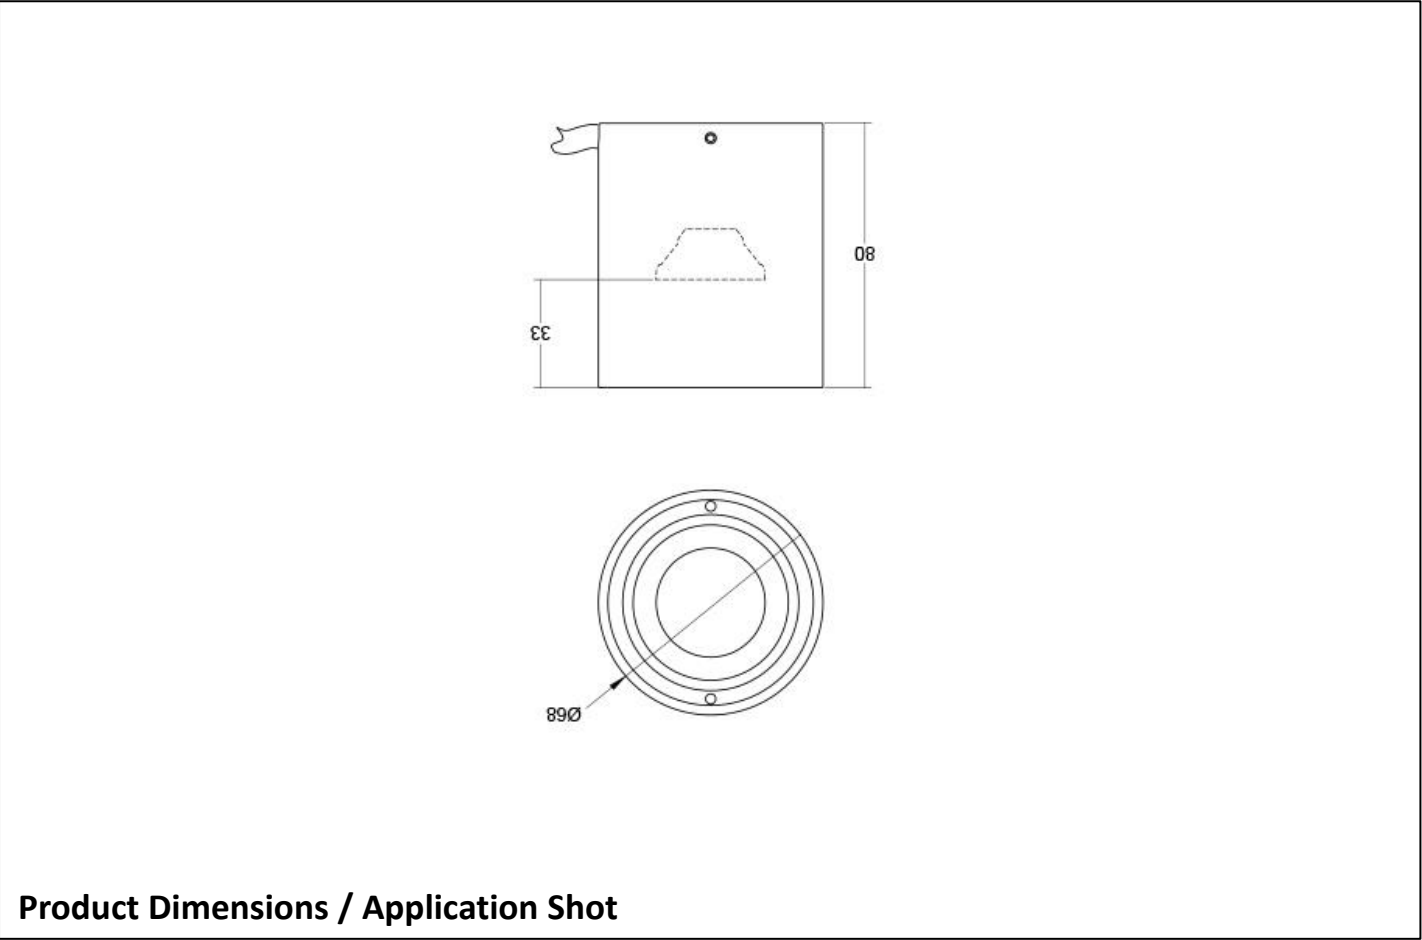

Product Dimensions / Application Shot


X11

Description	Surface mounted downlight
Fixing Type	Wall mounted
Finish	TBC
Attachments / Spec	54 degree beam
Colour Temperature	2700K
Colour Rendering Index	>93
Light Source	LED
Dimming Protocol	DALI
Wattage	8.4w
Lumen Output	653 lm
Lumens per Watt	65 lm/w
IP Rating	66
Notes	Include for all drivers, connections and fixing details necessary for complete working installation
Manufacturer	Light Graphix
Reference	LD10235
Contact	Dylan Parry E: dylan@lightgraphix.biz M: 07340399180

Artin.



Product Image

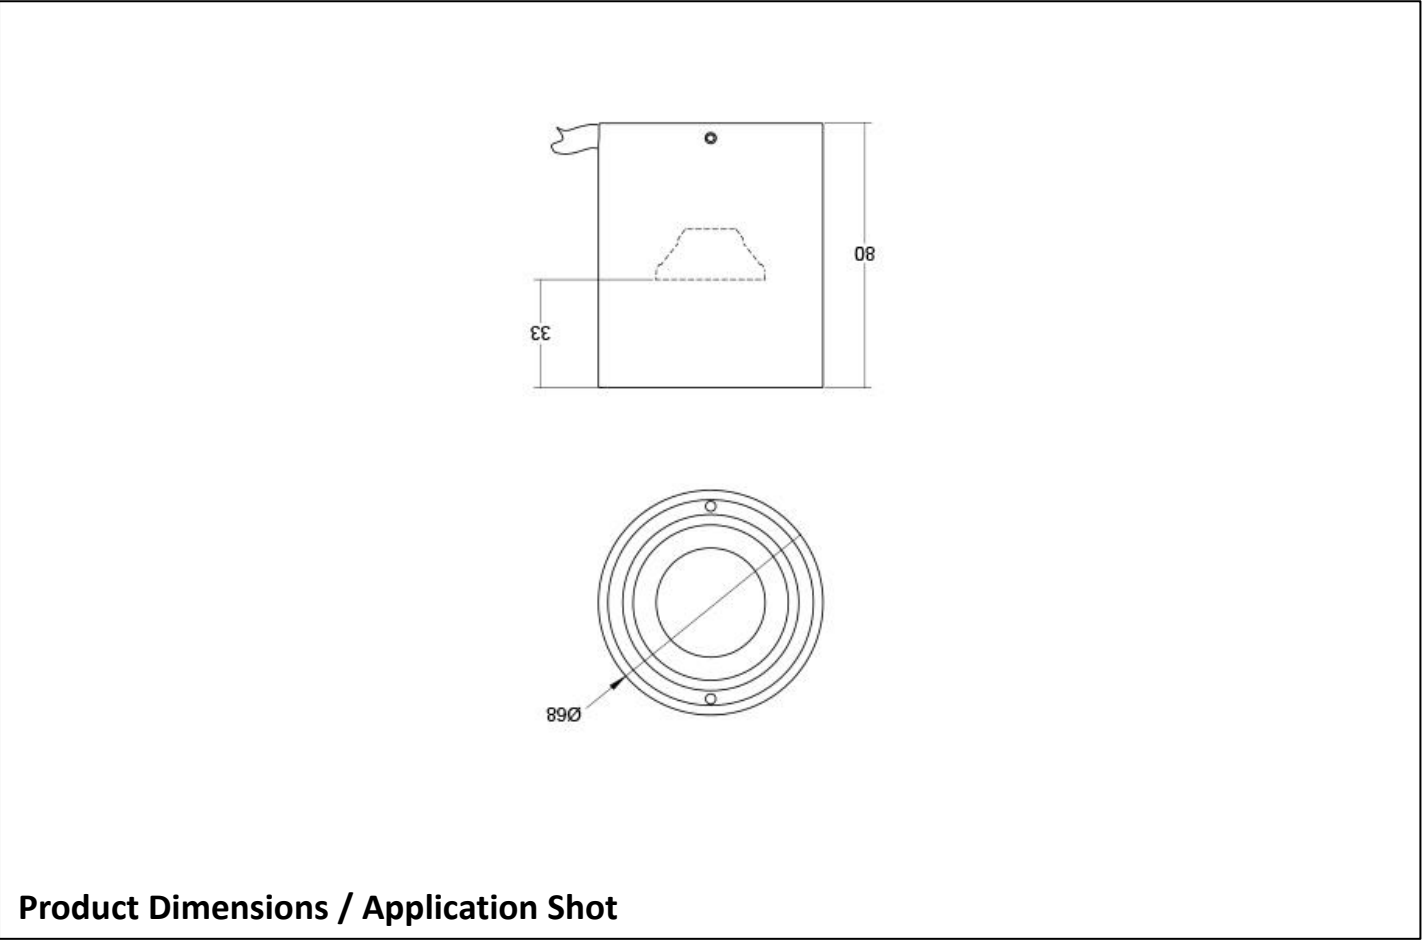


Product Dimensions / Application Shot


X12

Description	Recessed inground linear LED
Fixing Type	Recessed into ground
Finish	NA
Attachments / Spec	Allow for ground recessing kit
Colour Temperature	2700K
Colour Rendering Index	>90
Light Source	LED
Dimming Protocol	DALI
Wattage	14.4 w/m
Lumen Output	TBC lm/m
Lumens per Watt	TBC lm/w
IP Rating	67
Notes	Include for all drivers, connections and fixing details necessary for complete working installation
Manufacturer	Light Lab
Reference	GL25 Inground with base mount
Contact	Graeme Laurie E: graeme@thelightlab.com T: 0 207 278 2678


Artin.

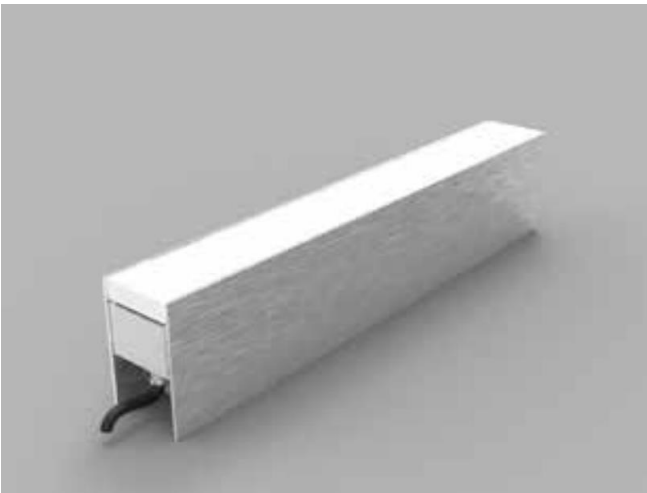

Flange Mount (FM)

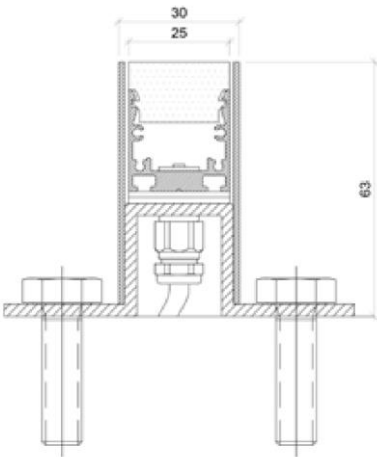

Product Image

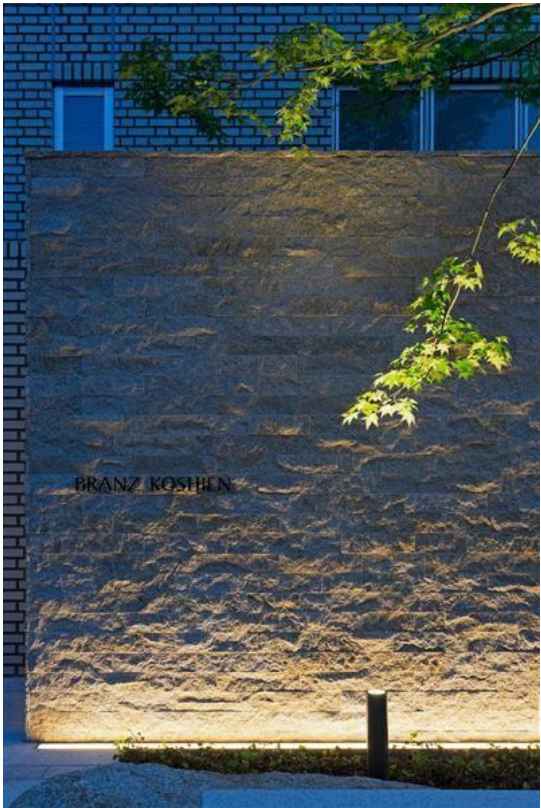

Product Dimensions / Application Shot

Emergency

EM


Description	Non maintained emergency LED downlight
Fixing Type	Ceiling Recessed
Finish	Allow for RAL finish to match ceiling finishes
Attachments / Spec	
Colour Temperature	NA
Colour Rendering Index	NA
Light Source	LED
Dimming Protocol	NA
Wattage	NA
Lumen Output	NA
Lumens per Watt	NA
IP Rating	20
Notes	Include for all drivers, connections and fixing details necessary for complete working installation
Manufacturer	LDL Lighting
Reference	TR2 Recessed LED
Contact	James Wilkinson E: james@ldl.lighting T: 07435552084

Artin.



RAL
TBC

Product Image

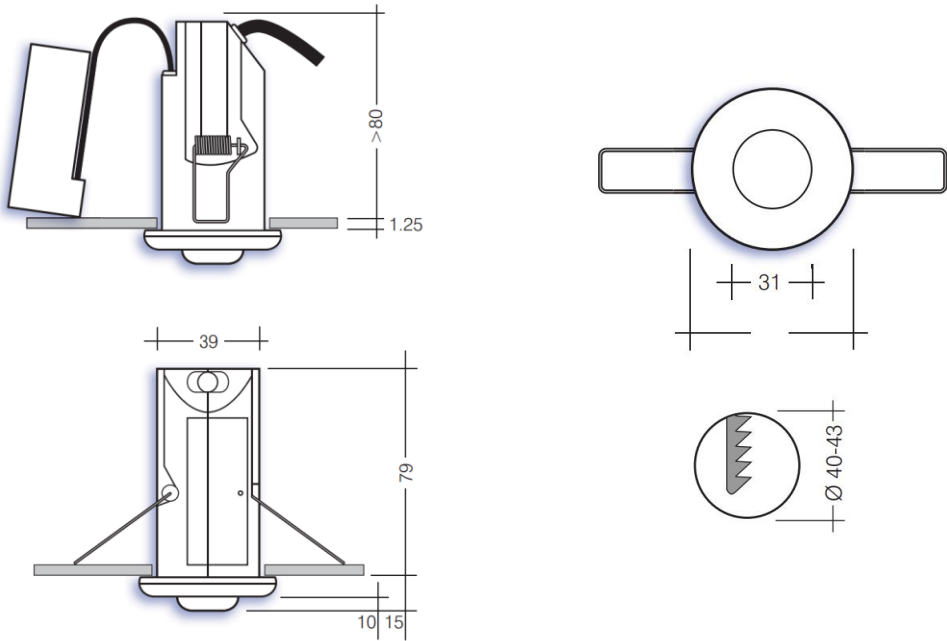


Product Dimensions / Application Shot

EM1

Description	Non maintained emergency LED downlight
Fixing Type	Surface mounted
Finish	Allow for RAL finish to match ceiling finishes
Attachments / Spec	
Colour Temperature	NA
Colour Rendering Index	NA
Light Source	LED
Dimming Protocol	NA
Wattage	NA
Lumen Output	NA
Lumens per Watt	NA
IP Rating	20
Notes	Include for all drivers, connections and fixing details necessary for complete working installation
Manufacturer	LDL Lighting
Reference	TR2 Surface LED
Contact	James Wilkinson E: james@ldl.lighting T: 07435552084

Artin.

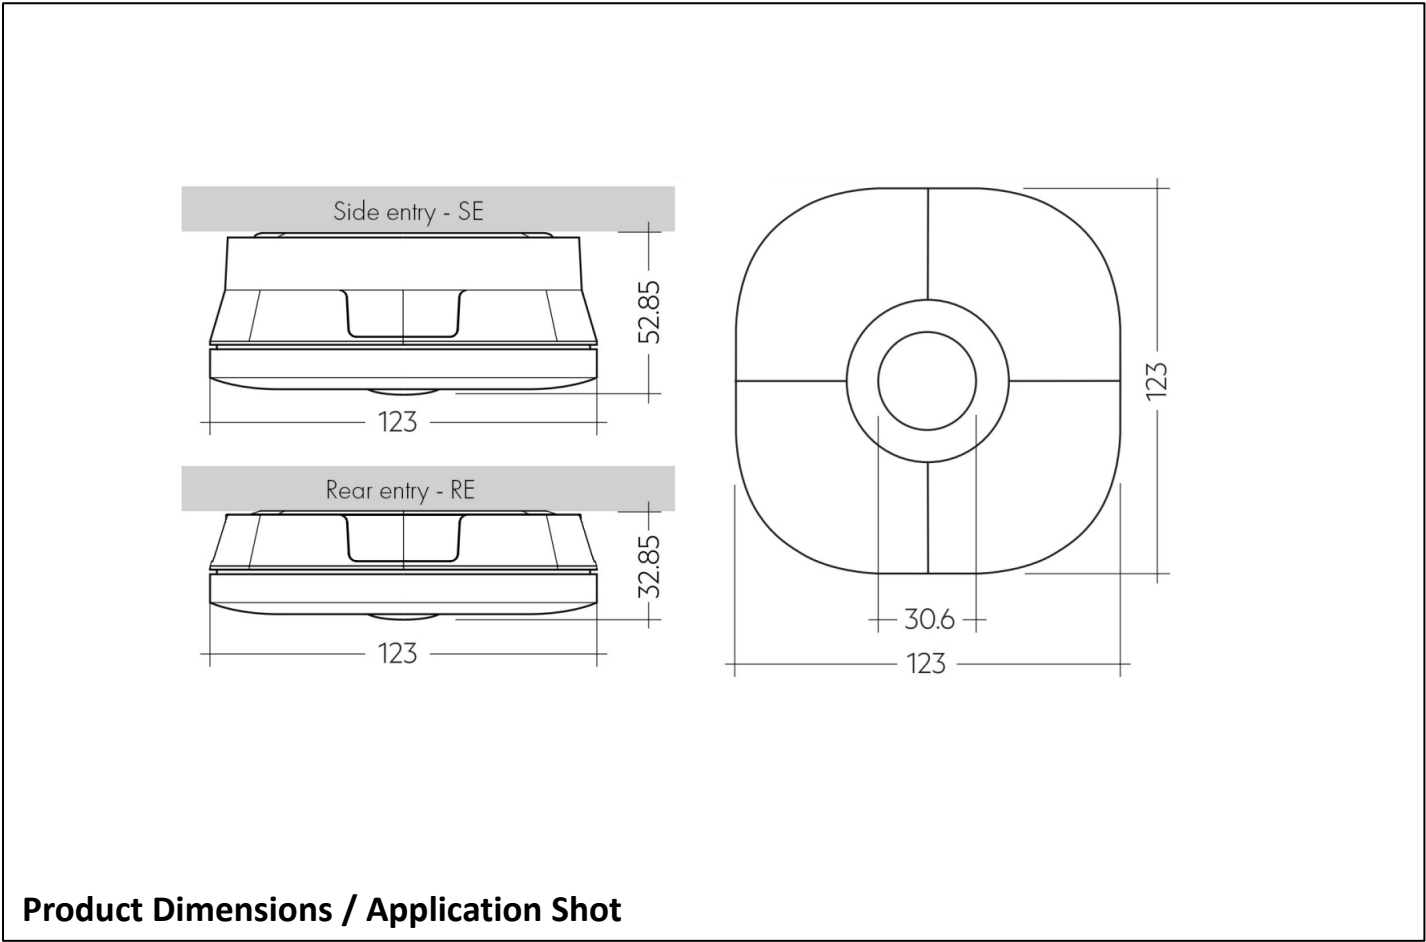


EM2

Description	Final Exit Non maintained emergency LED downlight
Fixing Type	Surface mounted
Finish	Black
Attachments / Spec	
Colour Temperature	NA
Colour Rendering Index	NA
Light Source	LED
Dimming Protocol	NA
Wattage	NA
Lumen Output	NA
Lumens per Watt	NA
IP Rating	65
Notes	Include for all drivers, connections and fixing details necessary for complete working installation
Manufacturer	Arlico
Reference	Peak
Contact	T: +44 (0)23 8202 2100 E: sales@arli.co

Artin.



Product Image


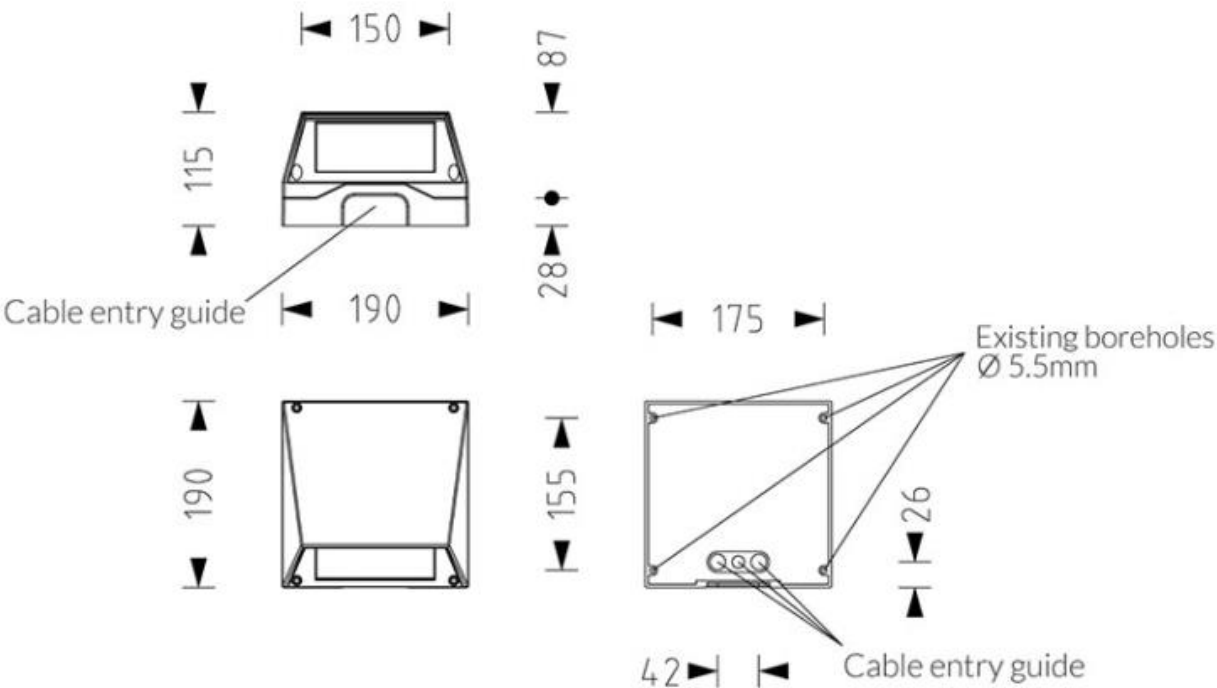


Product Dimensions / Application Shot

EM3

Description	Non maintained emergency LED downlight
Fixing Type	Ceiling Recessed
Finish	Allow for RAL finish to match pergola finish
Attachments / Spec	
Colour Temperature	NA
Colour Rendering Index	NA
Light Source	LED
Dimming Protocol	NA
Wattage	NA
Lumen Output	NA
Lumens per Watt	NA
IP Rating	54
Notes	Include for all drivers, connections and fixing details necessary for complete working installation
Manufacturer	LDL Lighting
Reference	LED3 Recessed
Contact	James Wilkinson E: james@ldl.lighting T: 07435552084

Artin.

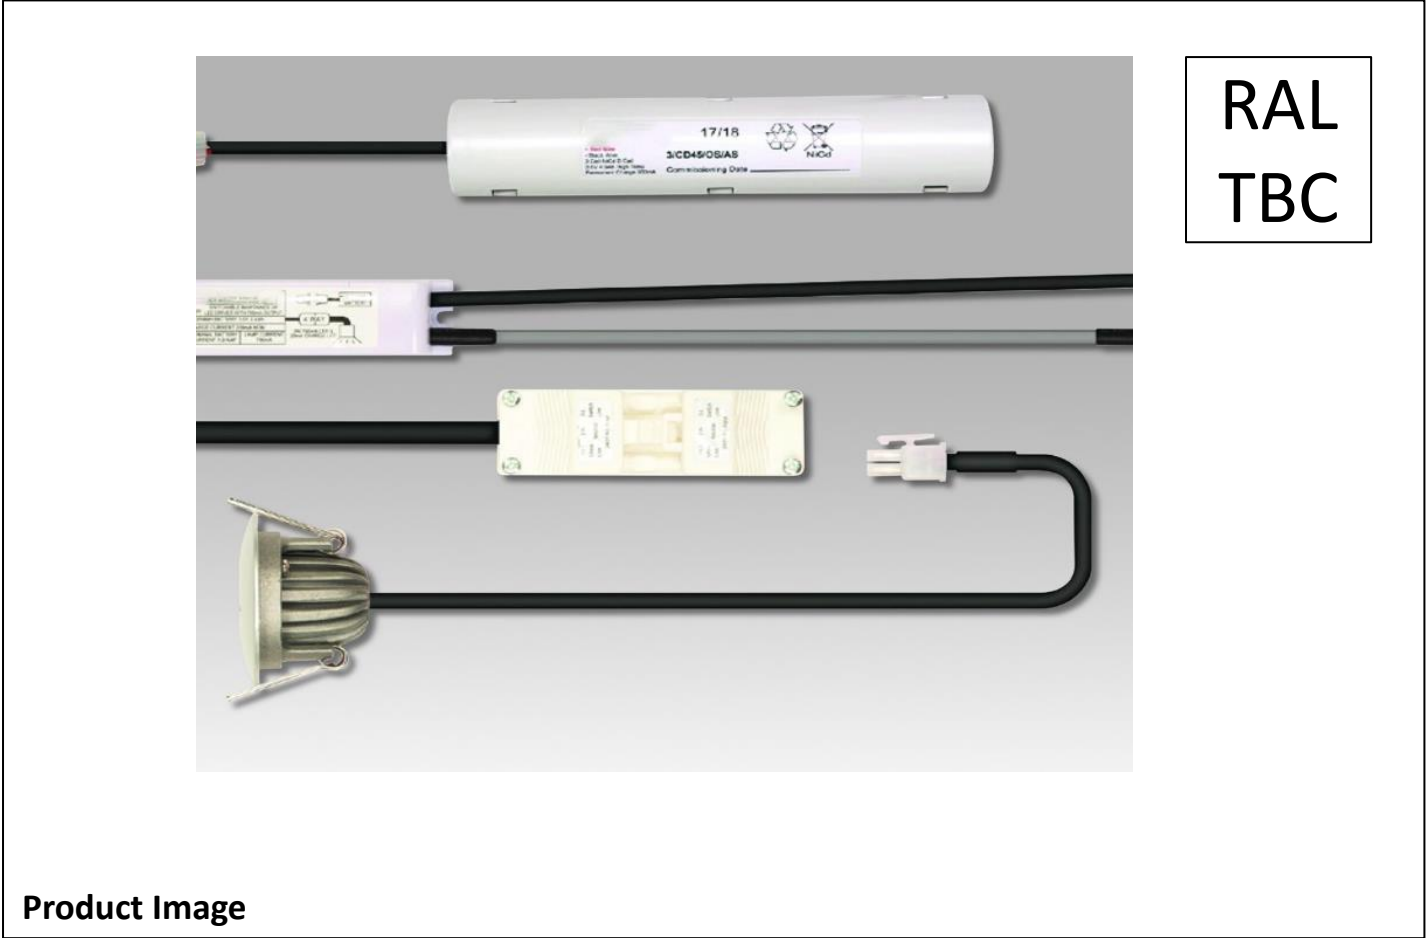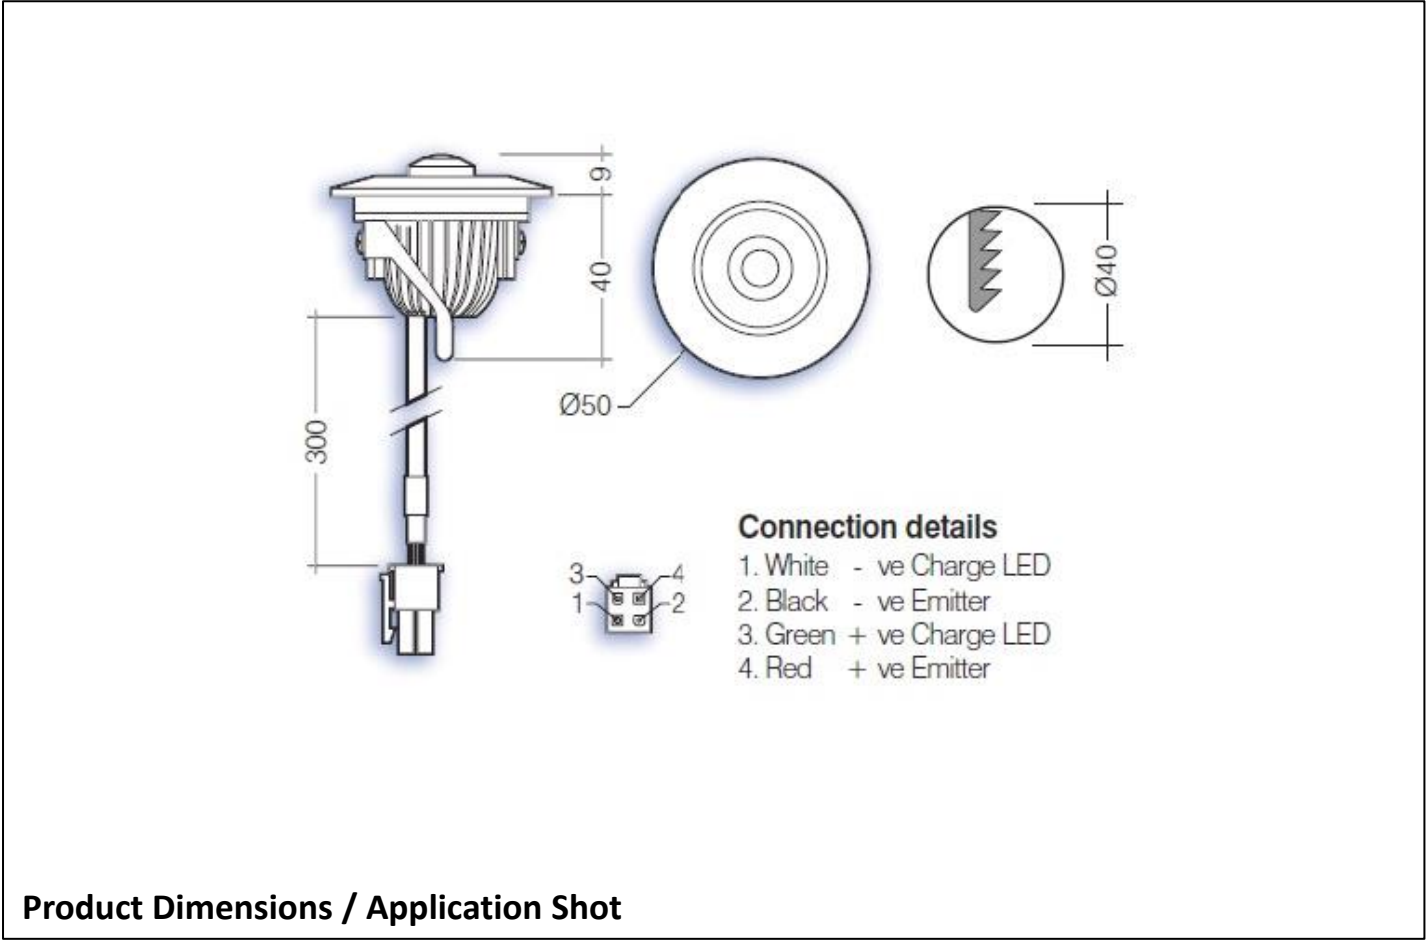

LUMINAIRE SCHEDULE NOTES

- The luminaire schedule shall be read in conjunction with the architects coordinated ceiling drawings, joinery detail drawings, and low-level power and data drawings.
- The main contractor shall provide 1no sample of each luminaire type for the client, architect and lighting designer to review prior to final sign off and ordering of the equipment
- All samples shall be plugged to review light distribution and effect
- Where bespoke luminaires have been specified the main contractor shall issue detail design drawings for each fitting type for the client, architect and lighting designer to review prior to final sign off and ordering of the equipment
- The main contractor shall ensure all lighting equipment is compatible with the chosen control gear and provides both seamless dimming and colour change capabilities
- 'e' Adjacent to luminaire references denotes 3hr integral emergency conversion unless otherwise stated
- The Main Contractor shall ensure all luminaires have the necessary British Standard compliance with Building Regulations and Fire Safety Regulations

© Artin Light Ltd All rights reserved. Content is issued confidentiality and should not be copied, printed or circulated to third parties without prior written consent from Artin Light Ltd

The information contained in this document is private and confidential. It is intended only for the use of the addressee's it is formerly issued to. If you are not the named addressee, in no event should you disclose the contents of this document to any other personnel copy, use, print, distribute or disseminate it or any information contained in it. Thank you for your co-operation. We cannot accept any liability for any loss or damage sustained as a result of software viruses. It is your responsibility to carry out such virus checking as is necessary before opening any attachment.

Contact - Luke Artingstall – Director - E: lukeart@artinlight.co.uk - T: +44 (0)7754056647