
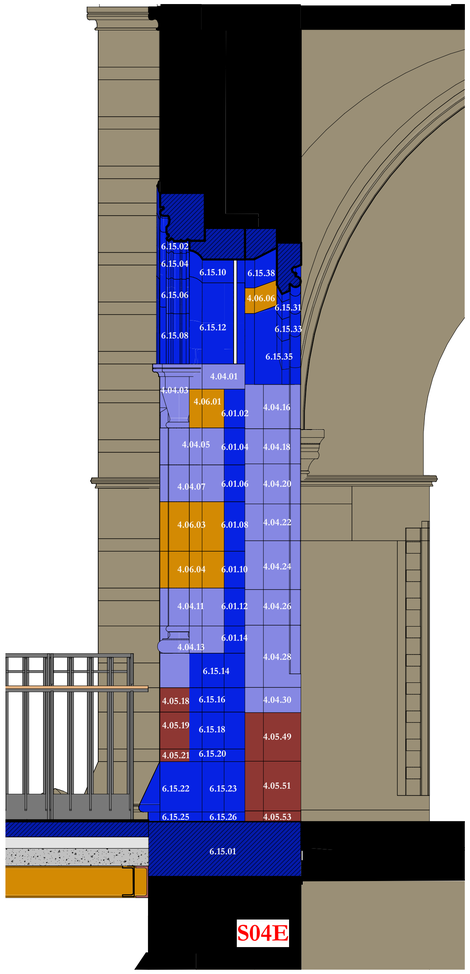




## S04E - North section

1 : 20




Key plan - S04E
North section

1 : 200

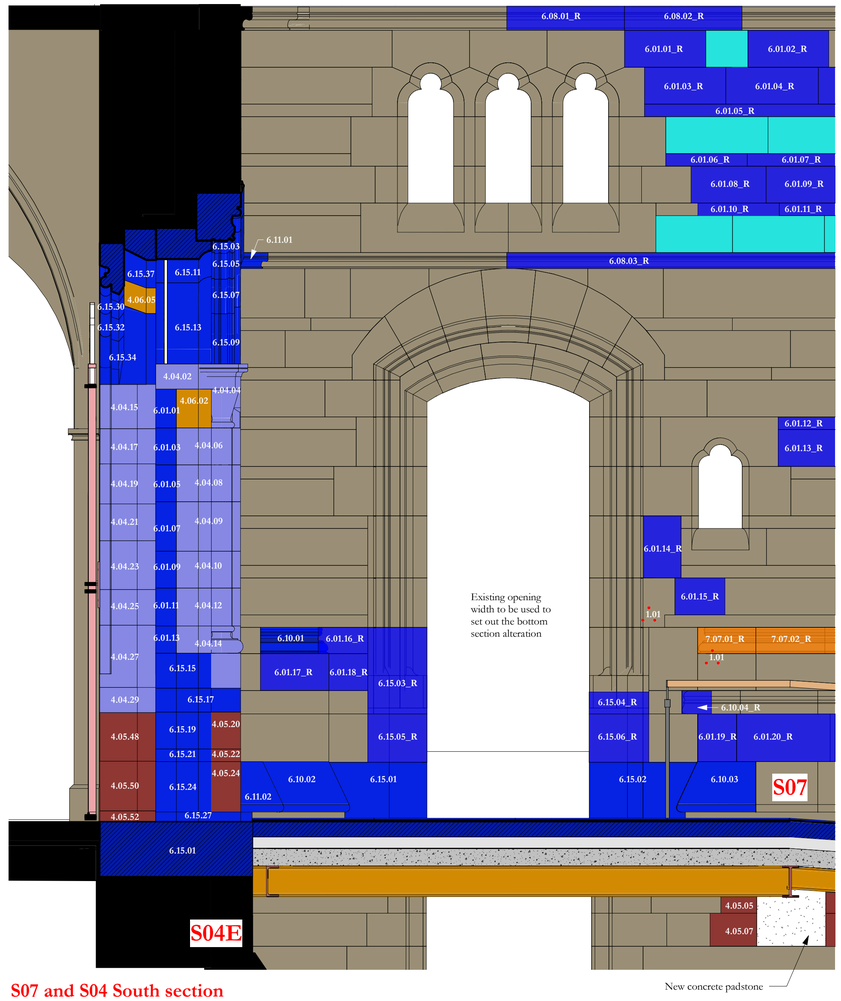



## S07 and S04 South section

1 : 20




Key plan - S04E
South section

1 : 200




## S07 proposed section

1 : 20



Key plan - S07
proposed section

1 : 200

## EXTERNAL REPAIRS KEY

**1.0 Remove**

**1.01** Remove metal bolts and anchors as clause NBS C41.411
**1.02** Remove wiring and fixings as NBS clause C41.412
**1.03** Remove existing pipes as NBS clause C41.412
**1.04** Remove existing duct as NBS clause C41.412
**1.05** Remove existing mesh as NBS clause C41.412
**1.06** Remove existing light fittings as NBS clause C41.412
**1.07** Remove plant life as NBS clause C41.132

**2.0 Clean**

**2.01** Remove paint from masonry around window perimeters using chemical poltice as NBS clause C40.525 rake out mortar and repoint as NBS clause C41.827
**2.02** Remove paint from masonry using chemical poltice as NBS clause C40.525

**2.03** Remove bird guano as NBS clause C40.417

**3.0 Descale stone**

**3.01** Remove flaking stone as NBS clause C41.456
**3.02** Redress stone as NBS clause as NBS clause C41.459

**4.0 Rebuild Rebed Refix**

**4.01** Carefully dismantle and rebuild masonry as NBS clauses C41.327 and 328.
**4.02** Take off coping remove damaged section and refit including new cramps as NBS clause C41.327.
**4.03** Remove loose and debonded section of mosaic and refix as NBS clauses C41.397 and 398

**4.04** Existing stone length adjusted and relocated

**4.05** Existing stone in original location, length adjusted

**4.06** Existing stone relocated without alteration

**4.07** Existing stone to be removed for use elsewhere as NBS clause C41.127

**4.08** Existing granite length adjusted and relocated

**4.09** Existing granite in original location, length adjusted

**4.10** Existing granite relocated without alteration

**4.11** Existing granite to be removed for use elsewhere

**5.0 Crack stitching/Repair**

**5.01** Stitch across crack/ wide joint and repoint as NBS clause C41.676
**5.02** Pin fracture and repoint as NBS clause C41.642

**6.0 Stone replacement**

**6.01** Facing stone as NBS clause C41.335
**6.02** Stone coping as NBS clause C41.336
**6.03** Balustrade top moulding as NBS clause C41.337
**6.04** Baluster as NBS clause C41.337
**6.05** Baluster base as NBS clause C41.337
**6.06** Cornice as NBS clause C41.338
**6.07** Hood mould as NBS clause C41.339
**6.08** String course as NBS clause C41.339
**6.09** Cill as NBS clause C41.342
**6.10** Plinth moulding as NBS clause C41.349
**6.11** Pipe collar as NBS clause C41.343
**6.12** Column Capital as NBS clause C41.341
**6.13** Column Shaft as NBS clause C41.341
**6.14** Column Base as NBS clause C41.341
**6.15** Other detail as NBS clause C41.349

**6.16** Granite Step replacement as NBS clause C41.242

**7.0 Stone indents**

**7.01** Facing stone as NBS clause C41.353
**7.02** Stone coping as NBS clause C41.353
**7.03** Cornice as NBS clause C41.353
**7.04** Hood mould as NBS clause C41.353
**7.05** String course as NBS clause C41.353
**7.06** Cill as NBS clause C41.352
**7.07** Plinth moulding as NBS clause C41.353
**7.08** Pipe collar as NBS clause C41.353
**7.09** Column Capital as NBS clause C41.353
**7.10** Column Shaft as NBS clause C41.353
**7.11** Column Base as NBS clause C41.353
**7.12** Other detail as NBS clause C41.353

**7.13** Granite indent as NBS clause C41.356

**8.0 Mortar repairs**

**8.01** Fill hole/gouge with mortar as NBS clause C41.518
**8.02** Repair weathered/eroded cill as NBS clause C41.516
**8.03** Fill/repair damaged stone detail as NBS clause C41.516
**8.04** Mortar repair crack/wide joint as NBS clause C41.611

**9.0 Brick and tile replacement**

**9.01** Replace eroded clay bricks as NBS clause C41.276
**9.02** Replace missing or damaged mosaic tiles as NBS clause C41.278

**9.03** Replace poorly matched modern brick as NBS clause C41.276

**9.04** Existing brick removed and reused

**10.0 Repointing and Regrouting**

**10.01** Complete repointing as NBS clause C41.805. Rake out and repoint all joints to copings, cornices, hood moulds, string courses and other areas indicated. Stone as NBS clause C41.821. Brick as NBS clause C41.822

**10.02** Selective repointing as NBS clause C41.806. Rake out and repoint failed and eroded joints. Stone as NBS clause C41.821. Brick as NBS clause C41.822. Allowance indicated on elevations to be confirmed prior to commencement of work

**10.03** Regrout mosaic tiling as NBS clause C41.401

**10.04** Grout void behind debonded mosaic render backing as NBS clause C41.399

**11.0 Fit New**

**11.01** Fit new lead weathering as NBS clause H71.251
**11.02** Fit new lining to chute as NBS clause H71.205
**11.03** Lead gutter as NBS clause H71.205

**11.04** Fit new cast iron air brick as NBS clause C41.270

**12.0 Repaint**

**12.01** Repaint existing ferrous metal in-situ as NBS clause M60.135

**_R**

Components to be replaced as part of the external fabric repairs are shown as new stone on the existing drawings and marked with _R after the item reference to distinguish them from stone replacement due to alterations

**Scale Bars** to be used as guidance only - refer to sheet size below

| | | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| 1:100 | mm | 1000 | | 3000 | | 5000 | | 7000 |
| 1:200 | mm | | 5000 | | 8000 | | 12000 | 16000 |
| 1:500 | M | 5 | | 15 | | 25 | | 35 |
| 1:1250 | M | 10 | | 30 | | 50 | | 70 | 90 |

**Notes:**
Drawings are based on survey data and may not accurately represent what is physically present.
Do not scale from this drawing. All dimensions are to be verified on site before proceeding with the work.
All dimensions are in millimeters unless noted otherwise.
Purcell shall be notified in writing of any discrepancies.

Key elevation



# Elevation - Lloyd St Key elevation

1 : 1000

**Revision 01:**
Handrail and guard rail added to external ramp, steel structure and pad stone layout amended

**Revision 02:**
Drawing issued for construction, key updated, all other information remains the same

| ISSUE | DATE | APPROVED | DRAWN | DESCRIPTION |
|---|---|---|---|---|
| 02 | 06/04/2020 | GR | TK | Construction issue, see note in cloud |
| 01 | 04/02/2020 | GR | EP | Refer to notes in revision cloud |
| - | 29/11/2019 | GR | EP | First Issue |


OUR TOWN HALL PROJECT

PURCELL

Project Office, Town Hall, MANCHESTER M60 2L1
+44 (0) 7970 097 432
www.purcelluk.com


| | |
|---|---|
| PROJECT STATUS | RIBA STAGE 4 |
| CLIENT | MANCHESTER CITY COUNCIL |
| PROJECT | OUR TOWN HALL |
| DRAWING TITLE | S07 / S04E Lloyd street elevation and sections proposed |
| SIZE & SCALE | A1: As indicated |
| DRAWING STATUS | S4 for Construction |
| JOB NUMBER | 236959 |
| DRAWING NO. | OTH-PUR-EX-ZZ-DWG-A-4131 |
| REV | 02 |

© PURCELL 2019. PURCELL ® IS THE TRADING NAME OF PURCELL ARCHITECTURE LTD.

06/04/2020 12:47:56