

	Species	Pot	Size	Density	No
SHURB PLANTING - LOW					
Hm	Hakonechloa macra 'Aureola'	3L	20-30	3sq.m	65
HR	Hebe rakaisensis	3L	20-30	4sq.m	20
LaV	Laevendula angustifolia 'Vera'	3L	20-30	4sq.m	35
Pv	Pleioblastus variegatus	5L	30-40	4sq.m	54
RKG	Rudbeckia fulgida 'Goldstrum'	3L	30-40	6sq.m	58
SKG	Skimmia 'New Green'	3L	20-30	4sq.m	72
Vd	Viburnum davidii	3L	20-30	4sq.m	37
SHURB PLANTING - MEDIUM					
CaE	Cornus alba 'Elegantissima'	5L	50-60	3sq.m	15
CS	Cornus stolonifera 'Flaviramea'	5L	50-60	3sq.m	15
CCF	Choysya ternata 'Sundance'	5L	50-60	3sq.m	22
HL	Hebe 'Midsummer Beauty'	3L	40-50	3sq.m	54
PF	Pieris 'Forest Flame'	5L	30-40	4sq.m	66
SG	Stipa tenuissima	5L	50-60	2sq.m	24
Pz	Prunus zabeliana	5L	50-60	3sq.m	132
Sn	Sambucus nigra aurea	5L	50-60	3sq.m	132

ORNAMENTAL HEDGE PLANTING - Planted in a staggered row at 6 per lin.m and to be					
Fg	Fagus sylvatica	BR	100-120	6lin.m	320
NATIVE HEDGEROW MIX - Planted in a staggered row at 6 per lin.m and to be protected					
Ca	Corylus avellana	BR	100-120	15%	22
Cm	Crataegus monogyna	BR	100-120	25%	38
Al	Acer campestre	BR	100-120	10%	15
Il	Ilex aquifolium	21 C	100-120	5%	8
Ag	Alnus glutinosa	BR	100-120	10%	15
Ms	Malus sylvestris	BR	100-120	10%	15
Pp	Prunus padus	BR	100-120	10%	15
Ry	Ribes sanguineum	BR	100-120	5%	8
Sa	Salix alba	BR	100-200	5%	8
Vo	Viburnum opulus	BR	100-120	5%	8
ORNAMENTAL TREE PLANTING					
		Spec		Height	
Bp	Betula pendula	14-16cm girth	Extra Heavy Standard		3
Pap	Prunus avium 'Piena'	20-25cm girth	Semi-mature		4
Sau	Sorbus aucuparia	14-16cm girth	Extra Heavy Standard		10
TG	Tilia cordata 'Greenspire'	18-20cm girth	Extra Heavy Standard		4

NB: Trees are to be supplied with min 2m clear stem

NB: Trees are to be supplied with min 2m clear stem

2. Tree procurement, planting and management shall be in accordance with BS 8545:2014 Parts 2: From Nursery to Independence in the landscape-Recommendations.

3. All other plants must be handled in accordance with 'Plant Handling', the booklet published by the Committee for Plant Supply and Establishment (CPSE). The contractor shall comply with clauses 3 & 4 of the above booklet (obtained from the Horticulture Trades Association, 19 High Street, Theale, Reading, RG7 5H) which refers to the receipt, unloading and temporary storage of plants.

4. All plants must be free from any diseases or viruses, free from all pests and diseases, with good fibrous root systems and materially undamaged (refer to relevant sections of BS3936 Parts 1-4 'Specification of Nursery Stock').

5. All planting is to be in general compliance with BS4248: 1989 'Code of Practice for general landscape operations (excluding hard surfaces)'.
a. Shrubs shall be to have a min depth of 450mm good quality topsoil, beds should be cultivated prior to planting and be free from weeds or any stones/ rubble material greater than 50mm

5.1. Wildflower meadow - Remove unwanted weeds and vegetation from area to be sown. Prepare ground and spray with a glyphosate based weed killer in line with manufacturers recommendations. Sow seed mix £M3 from Enniscorthy at a rate of 4g per square metre.

6. All BR Whips and BR Stock (proposed ornamental hedge, native hedge and native shrub mix) to be protected with a spiral bound tree-shrub guard and secured into place with a cane. Ensure the cane runs around the base of the shrubs are maintained weed free during the establishment period using a glyphosate based herbicide. BR Stock should be notch planted and healed securely to form into position.

7. All trees are to be staked and secured as follows:
a. Extra Heavy Standard / Semi-medium trees to be double staked and secured stakes (at 600mm above ground level) and secured with a cross bar and rubber webbing tie and spacer.

8. For the ornamental trees : One number 80 litre bag of tree planting compost (non-peat based) is to be incorporated into tree pits.


9. All trees must be planted in the following way:
a. All trees to be planted in tree pits of the following minimum sizes (or large enough to comfortably accommodate the root ball, whichever is the largest):
Extra Heavy Standard / Semi-medium 1200x1200x800mm deep

9.1 The contractor must ascertain for himself/herself the exact location of underground services and mark them out on the ground.

10. All areas of ornamental trees are to be mulched to a depth of 50mm with medium grade tree bark.

11. It is presumed that the grassed areas will be seeded with a general amenity grass (unless otherwise advised by the client).

12. After all the planting has been completed, the watering of planting and there after as necessary (min once a week in periods of drought) to ensure the establishment of the plants during the 12months defects period.

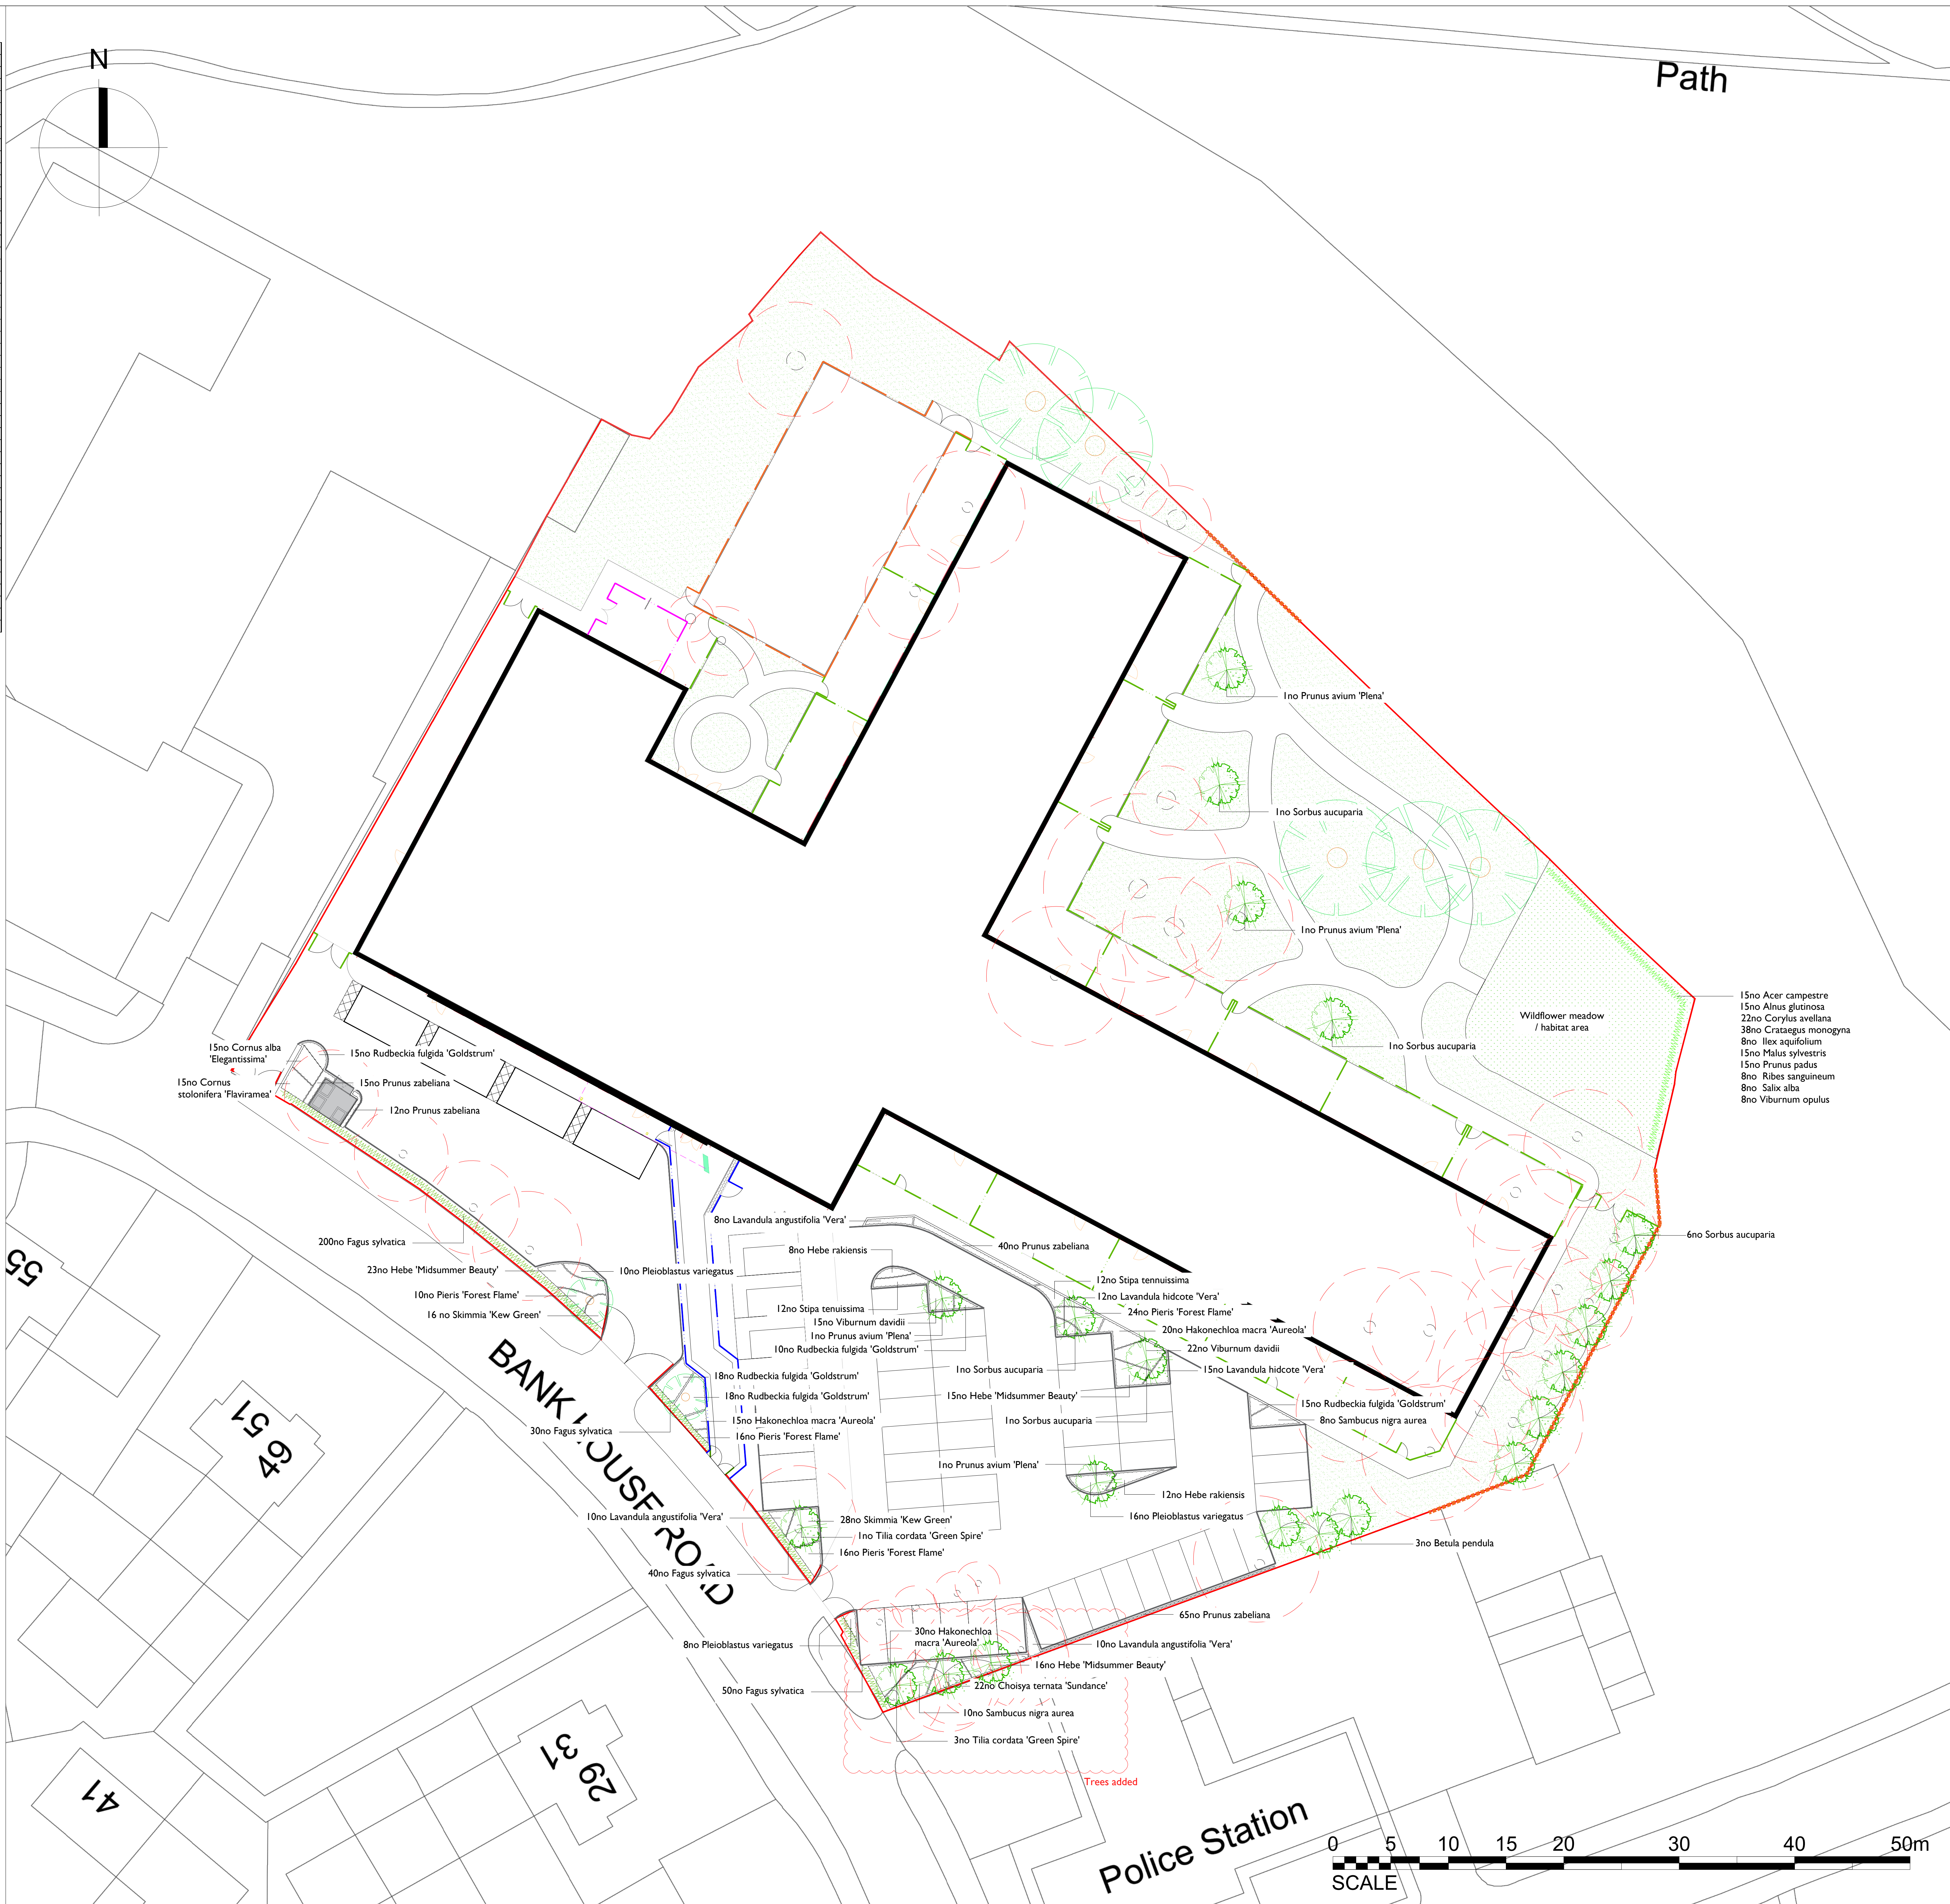

	Existing Trees/Vegetation to be retained Refer to Tree Survey
	Existing Trees to be removed Refer to Tree Survey
	Proposed Trees
	Proposed Planting
	Proposed Native Hedge Planting
	Proposed Grass Areas
	Proposed Wildflower Meadow Area

Rev E: 10nr tree species added	DH	02/07/2020
Rev D: Tree species updated	DH	23/06/2020
Rev C: Front path adjusted	TR	23/03/2020
Rev B: Updated following TA review	TR	29/10/2019
Rev A: Drawing re-scaled to 1:200. Trees to be removed added TR		08/10/2019



DEP LANDSCAPE ARCHITECTURE LTD
2 COMMERCIAL STREET
MANCHESTER, M15 4RQ
T: 0161 2419878
E: info@dep.co.uk
W: www.dep.co.uk

Client
Interserve Construction Ltd

Project
Prospect House

Description

Planting Plan

FS083I-DEP-00-XX-DR-L-0015

Status

Contractors Proposals

Scale	Drawn		
1:200@A0	TR		
Job number	Drawing number	Date	Revision
(4264)	0015	17/09/19	E

Copyright DEP Landscape Architecture Ltd

© Copyright to DEP Landscape Architecture Limited. The information shown on this drawing shall not be reproduced or copied in any form without prior written consent from DEP Landscape Architecture Limited.