






Proposed Trees - Planted as 14-16cm Extra Heavy Standards 2m clear stem *Carpinus betulus* 'Frans Fontaine'.




Proposed Trees - Planted as 12-14cm Heavy Standards 2m clear stem




Proposed *Carpinus betulus* hedge - Planted as 2L containerised stock at 5 per lin.m




Proposed Ornamental Shrubs Beds - Planted as 3-5L containerised stock at 3-5 per sq.m



Proposed Grass - To be laid with turf with general amenity turf.



Existing trees to be retained - refer arboricultural report

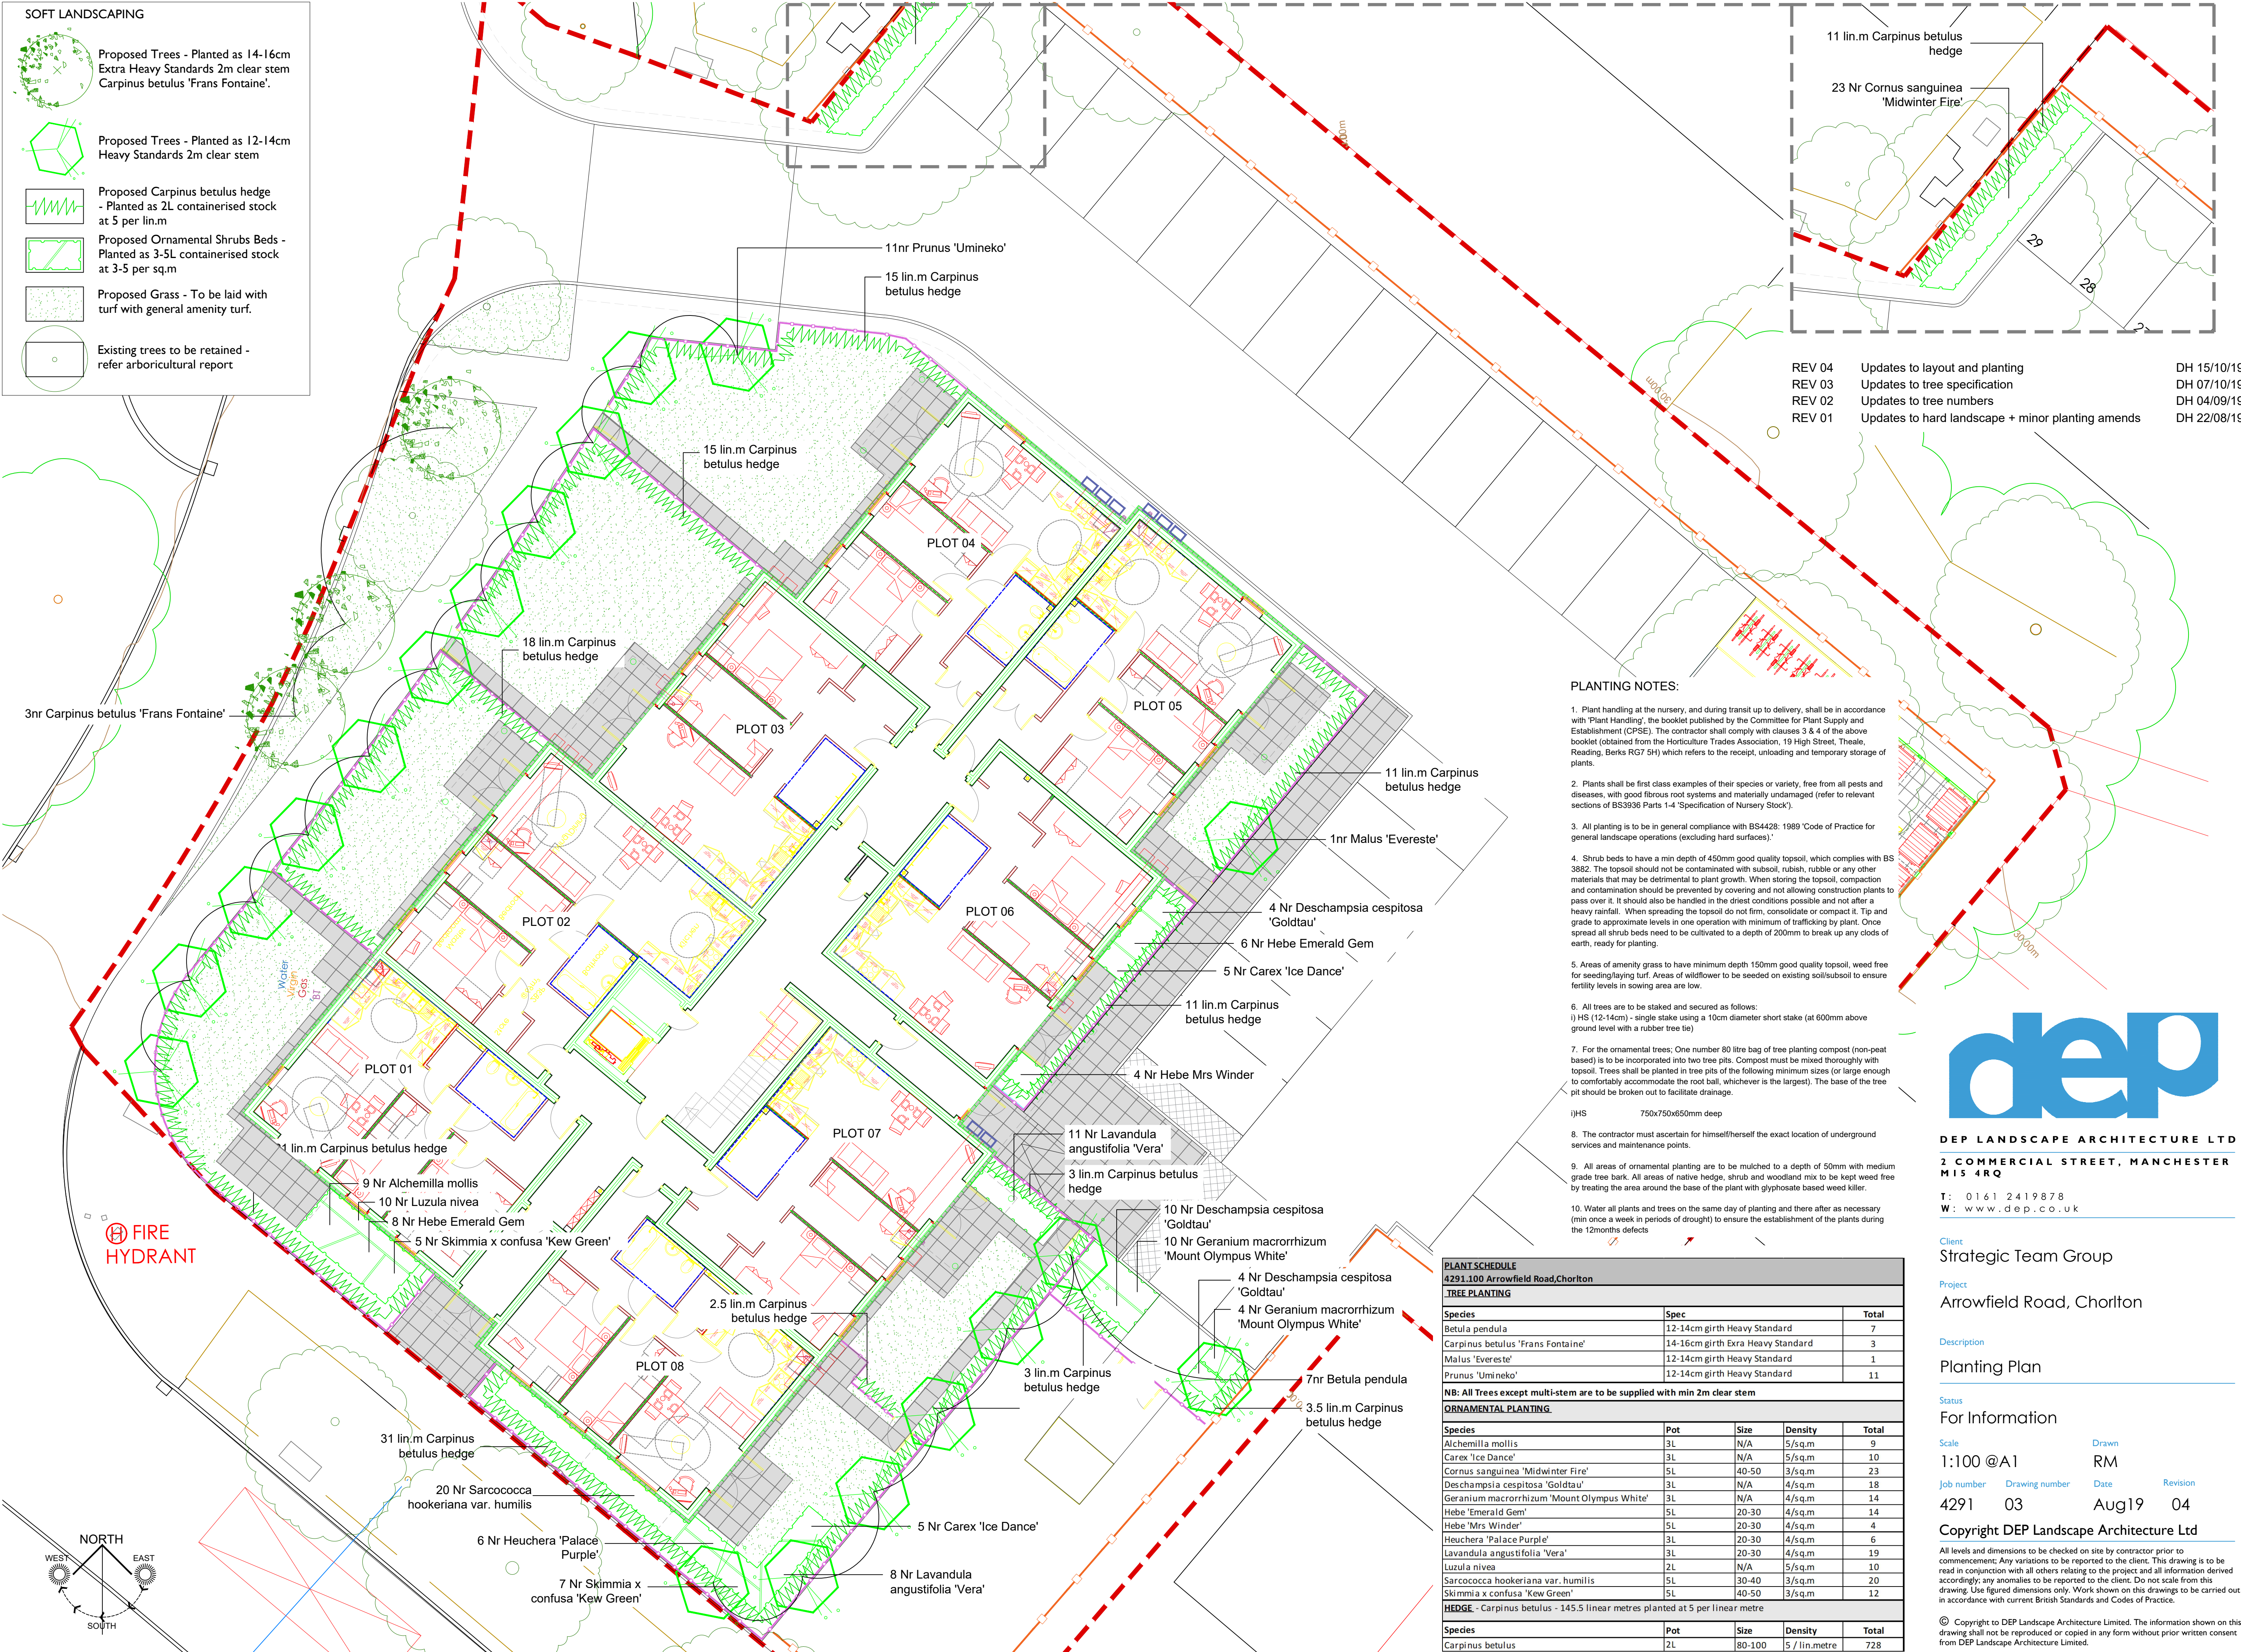

REV 04	Updates to layout and planting	DH 15/10/19
REV 03	Updates to tree specification	DH 07/10/19
REV 02	Updates to tree numbers	DH 04/09/19
REV 01	Updates to hard landscape + minor planting amends	DH 22/08/19

PLANTING NOTES:

- Plant handling at the nursery, and during transit up to delivery, shall be in accordance with 'Plant Handling', the booklet published by the Committee for Plant Supply and Establishment (CPSE). The contractor shall comply with clauses 3 & 4 of the above booklet (obtained from the Horticulture Trades Association, 19 High Street, Theale, Reading, Berks RG7 5H) which refers to the receipt, unloading and temporary storage of plants.
- Plants shall be first class examples of their species or variety, free from all pests and diseases, with good fibrous root systems and materially undamaged (refer to relevant sections of BS3936 Parts 1-4 'Specification of Nursery Stock').
- All planting is to be in general compliance with BS4428: 1989 'Code of Practice for general landscape operations (excluding hard surfaces)'.
- Shrub beds to have a min depth of 450mm good quality topsoil, which complies with BS 3882. The topsoil should not be contaminated with subsoil, rubbish, rubble or any other materials that may be detrimental to plant growth. When storing the topsoil, compaction and contamination should be prevented by covering and not allowing construction plants to pass over it. It should also be handled in the driest conditions possible and not after a heavy rainfall. When spreading the topsoil do not firm, consolidate or compact it. Tip and grade to approximate levels in one operation with minimum of trafficking by plant. Once spread all shrub beds need to be cultivated to a depth of 200mm to break up any clods of earth, ready for planting.
- Areas of amenity grass to have minimum depth 150mm good quality topsoil, weed free for seeding/laying turf. Areas of wildflower to be seeded on existing soil/subsoil to ensure fertility levels in sowing area are low.
- All trees are to be staked and secured as follows:
i) HS (12-14cm) - single stake using a 10cm diameter short stake (at 600mm above ground level with a rubber tree tie)
- For the ornamental trees: One number 80 litre bag of tree planting compost (non-peat based) is to be incorporated into two tree pits. Compost must be mixed thoroughly with topsoil. Trees shall be planted in tree pits of the following minimum sizes (or large enough to comfortably accommodate the root ball, whichever is the largest). The base of the tree pit should be broken out to facilitate drainage.

i)HS 750x750x650mm deep
- The contractor must ascertain for himself/herself the exact location of underground services and maintenance points.
- All areas of ornamental planting are to be mulched to a depth of 50mm with medium grade tree bark. All areas of native hedge, shrub and woodland mix to be kept weed free by treating the area around the base of the plant with glyphosate based weed killer.
- Water all plants and trees on the same day of planting and there after as necessary (min once a week in periods of drought) to ensure the establishment of the plants during the 12months defects

PLANT SCHEDULE				
4291.100 Arrowfield Road, Chorlton				
TREE PLANTING				
Species	Spec	Total		
Betula pendula	12-14cm girth Heavy Standard	7		
Carpinus betulus 'Frans Fontaine'	14-16cm girth Extra Heavy Standard	3		
Malus 'Evereste'	12-14cm girth Heavy Standard	1		
Prunus 'Umineko'	12-14cm girth Heavy Standard	11		
NB: All Trees except multi-stem are to be supplied with min 2m clear stem				
ORNAMENTAL PLANTING				
Species	Pot	Size	Density	Total
Alchemilla mollis	3L	N/A	5/sq.m	9
Carex 'Ice Dance'	3L	N/A	5/sq.m	10
Cornus sanguinea 'Midwinter Fire'	5L	40-50	3/sq.m	23
Deschampsia cespitosa 'Goldtau'	3L	N/A	4/sq.m	18
Geranium macrorrhizum 'Mount Olympus White'	3L	N/A	4/sq.m	14
Hebe 'Emerald Gem'	5L	20-30	4/sq.m	14
Hebe 'Mrs Winder'	5L	20-30	4/sq.m	4
Heuchera 'Palace Purple'	3L	20-30	4/sq.m	6
Lavandula angustifolia 'Vera'	3L	20-30	4/sq.m	19
Luzula nivea	2L	N/A	5/sq.m	10
Sarcococca hookeriana var. humilis	5L	30-40	3/sq.m	20
Skimmia x confusa 'Kew Green'	5L	40-50	3/sq.m	12
HEDGE - Carpinus betulus - 145.5 linear metres planted at 5 per linear metre				
Species	Pot	Size	Density	Total
Carpinus betulus	2L	80-100	5 / lin.metre	728



DEP LANDSCAPE ARCHITECTURE LTD
2 COMMERCIAL STREET, MANCHESTER
M15 4RQ
T: 0161 2419878
W: www.dep.co.uk

Client
Strategic Team Group

Project
Arrowfield Road, Chorlton

Description
Planting Plan

Status
For Information

Scale
1:100 @A1

Job number
4291

Drawing number
03

Date
Aug19

Revision
04

Copyright DEP Landscape Architecture Ltd

All levels and dimensions to be checked on site by contractor prior to commencement; Any variations to be reported to the client. This drawing is to be read in conjunction with all others relating to the project and all information derived accordingly; any anomalies to be reported to the client. Do not scale from this drawing. Use figured dimensions only. Work shown on this drawings to be carried out in accordance with current British Standards and Codes of Practice.

© Copyright to DEP Landscape Architecture Limited. The information shown on this drawing shall not be reproduced or copied in any form without prior written consent from DEP Landscape Architecture Limited.