

LEGEND	
SYMBOL	DESCRIPTION
	EXISTING M&E SERVICES TO BE ISOLATED, DISCONNECTED AND REMOVED WITH THE EXCEPTION OF ITEMS IDENTIFIED AS BEING RETAINED. ALL OTHER AREAS TO BE STRIPPED OUT IN THEIR ENTIRETY.

This document and its contents are the property of the Purchaser/Employer and Crookes Walker Consulting. They may not be copied or reproduced in any way, in part or whole, without prior written approval of both parties. Violations will result in legal action.
This drawing shall be read in conjunction with the CWC Mechanical and / or Electrical Specification(s).
DO NOT SCALE FROM THIS DRAWING

DESIGNERS RISK ASSESSMENT
REFER TO APPENDIX 1 OF M&E SPECIFICATION FOR DESIGNERS RISK ASSESSMENT SCHEDULE

DRAWING BACKGROUND(S): FS7.2-MS-04

NOTES

- 1) THIS DRAWING SHALL BE READ IN ACCORDANCE WITH THE CWC M&E STRIP OUT SPECIFICATION.
- 2) A NUMBER OF ITEMS OF PLANT AND EQUIPMENT ARE IDENTIFIED ON THIS DRAWING AS BEING RETAINED HOWEVER THE CONTRACTOR SHALL REFER TO THE LEVITT BERNSTEIN "INTERNAL FINISHES, FIXTURES & FITTINGS STRATEGY" DOCUMENT AND THE DOCUMENTATION PREPARED BY STEPHEN LEVRANT HERITAGE ARCHITECTURE FOR FULL DETAILS OF EQUIPMENT TO BE RETAINED.
- 3) THE CONTRACTOR SHALL ENSURE THAT SERVICES ARE SAFELY ISOLATED AND LOCKED OFF PRIOR TO DISCONNECTION AND REMOVAL.
- 4) ANY SERVICES REMAINING UPON COMPLETION OF THE STRIP OUT WORKS SHALL BE LEFT SAFE AND IN A NEAT AND TIDY MANNER WHICH DOES NOT RESTRICT OR PROHIBIT THE PROPOSED PHASE 2 WORKS.
- 5) ALL REMAINING SERVICES SHALL BE CLEARLY LABELED IDENTIFYING THEIR PURPOSE AND THE ORIGIN OF SUPPLY.
- 6) THE CONTRACTOR SHALL REVIEW THE ASBESTOS REGISTER AND FAMILIARISE THEMSELVES WITH ANY POTENTIAL ASBESTOS AND/OR OTHER HAZARDOUS MATERIALS PRIOR TO STRIP OUT WORKS COMMENCING.
- 7) THE CONTRACTOR SHALL CONSIDER THE BUILDINGS HERITAGE STATUS WHEN CARRYING OUT ANY WORKS AND SHALL TAKE CARE NOT TO DAMAGE ANY HERITAGE OR RETAINED FEATURES.
- 8) A NUMBER OF SITE TEMPORARY SUPPLIES AND ADVANCED WORKS PACKAGES HAVE ALREADY BEEN CARRIED OUT. THE CONTRACTOR SHALL TAKE ACCOUNT OF THESE WHEN CARRYING OUT THE STRIP-OUT WORKS AND SHALL ENSURE THAT THEY ARE NOT AFFECTED OR ARE ADEQUATELY RE-SUPPLIED FOLLOWING STRIP-OUT WORKS BEING CARRIED OUT.

P3	27.01.20	UPDATED IN LINE WITH SLHA INFO	NS	KS
P2	09.01.20	UPDATED IN LINE WITH COMMENTS	NS	KS
P1	24.12.19	PRELIMINARY ISSUE	NS	KS
Rev	Date	Description	Eng	Chk

CWC

crookes walker consulting

Alberton House, 30 St Mary's Parsonage
Manchester M3 2WJ
Tel: 0161 834 9999
The Plaza, Old Hall Street,
Liverpool L3 5QJ
Tel: 0151 600 5409
E-mail: admin@cwcon.co.uk
Website: www.cwcon.co.uk

Client

AlliedLondon


Project
LONDON ROAD FIRE
STATION, MANCHESTER

Drawing Title
THIRD FLOOR
M&E STRIP OUT

Status
PRELIMINARY

Project No.	Drawn	Scale / Paper Size
1968	NS	1:200 @ A1

Drawing No.	Rev
1968-03-4002	P3

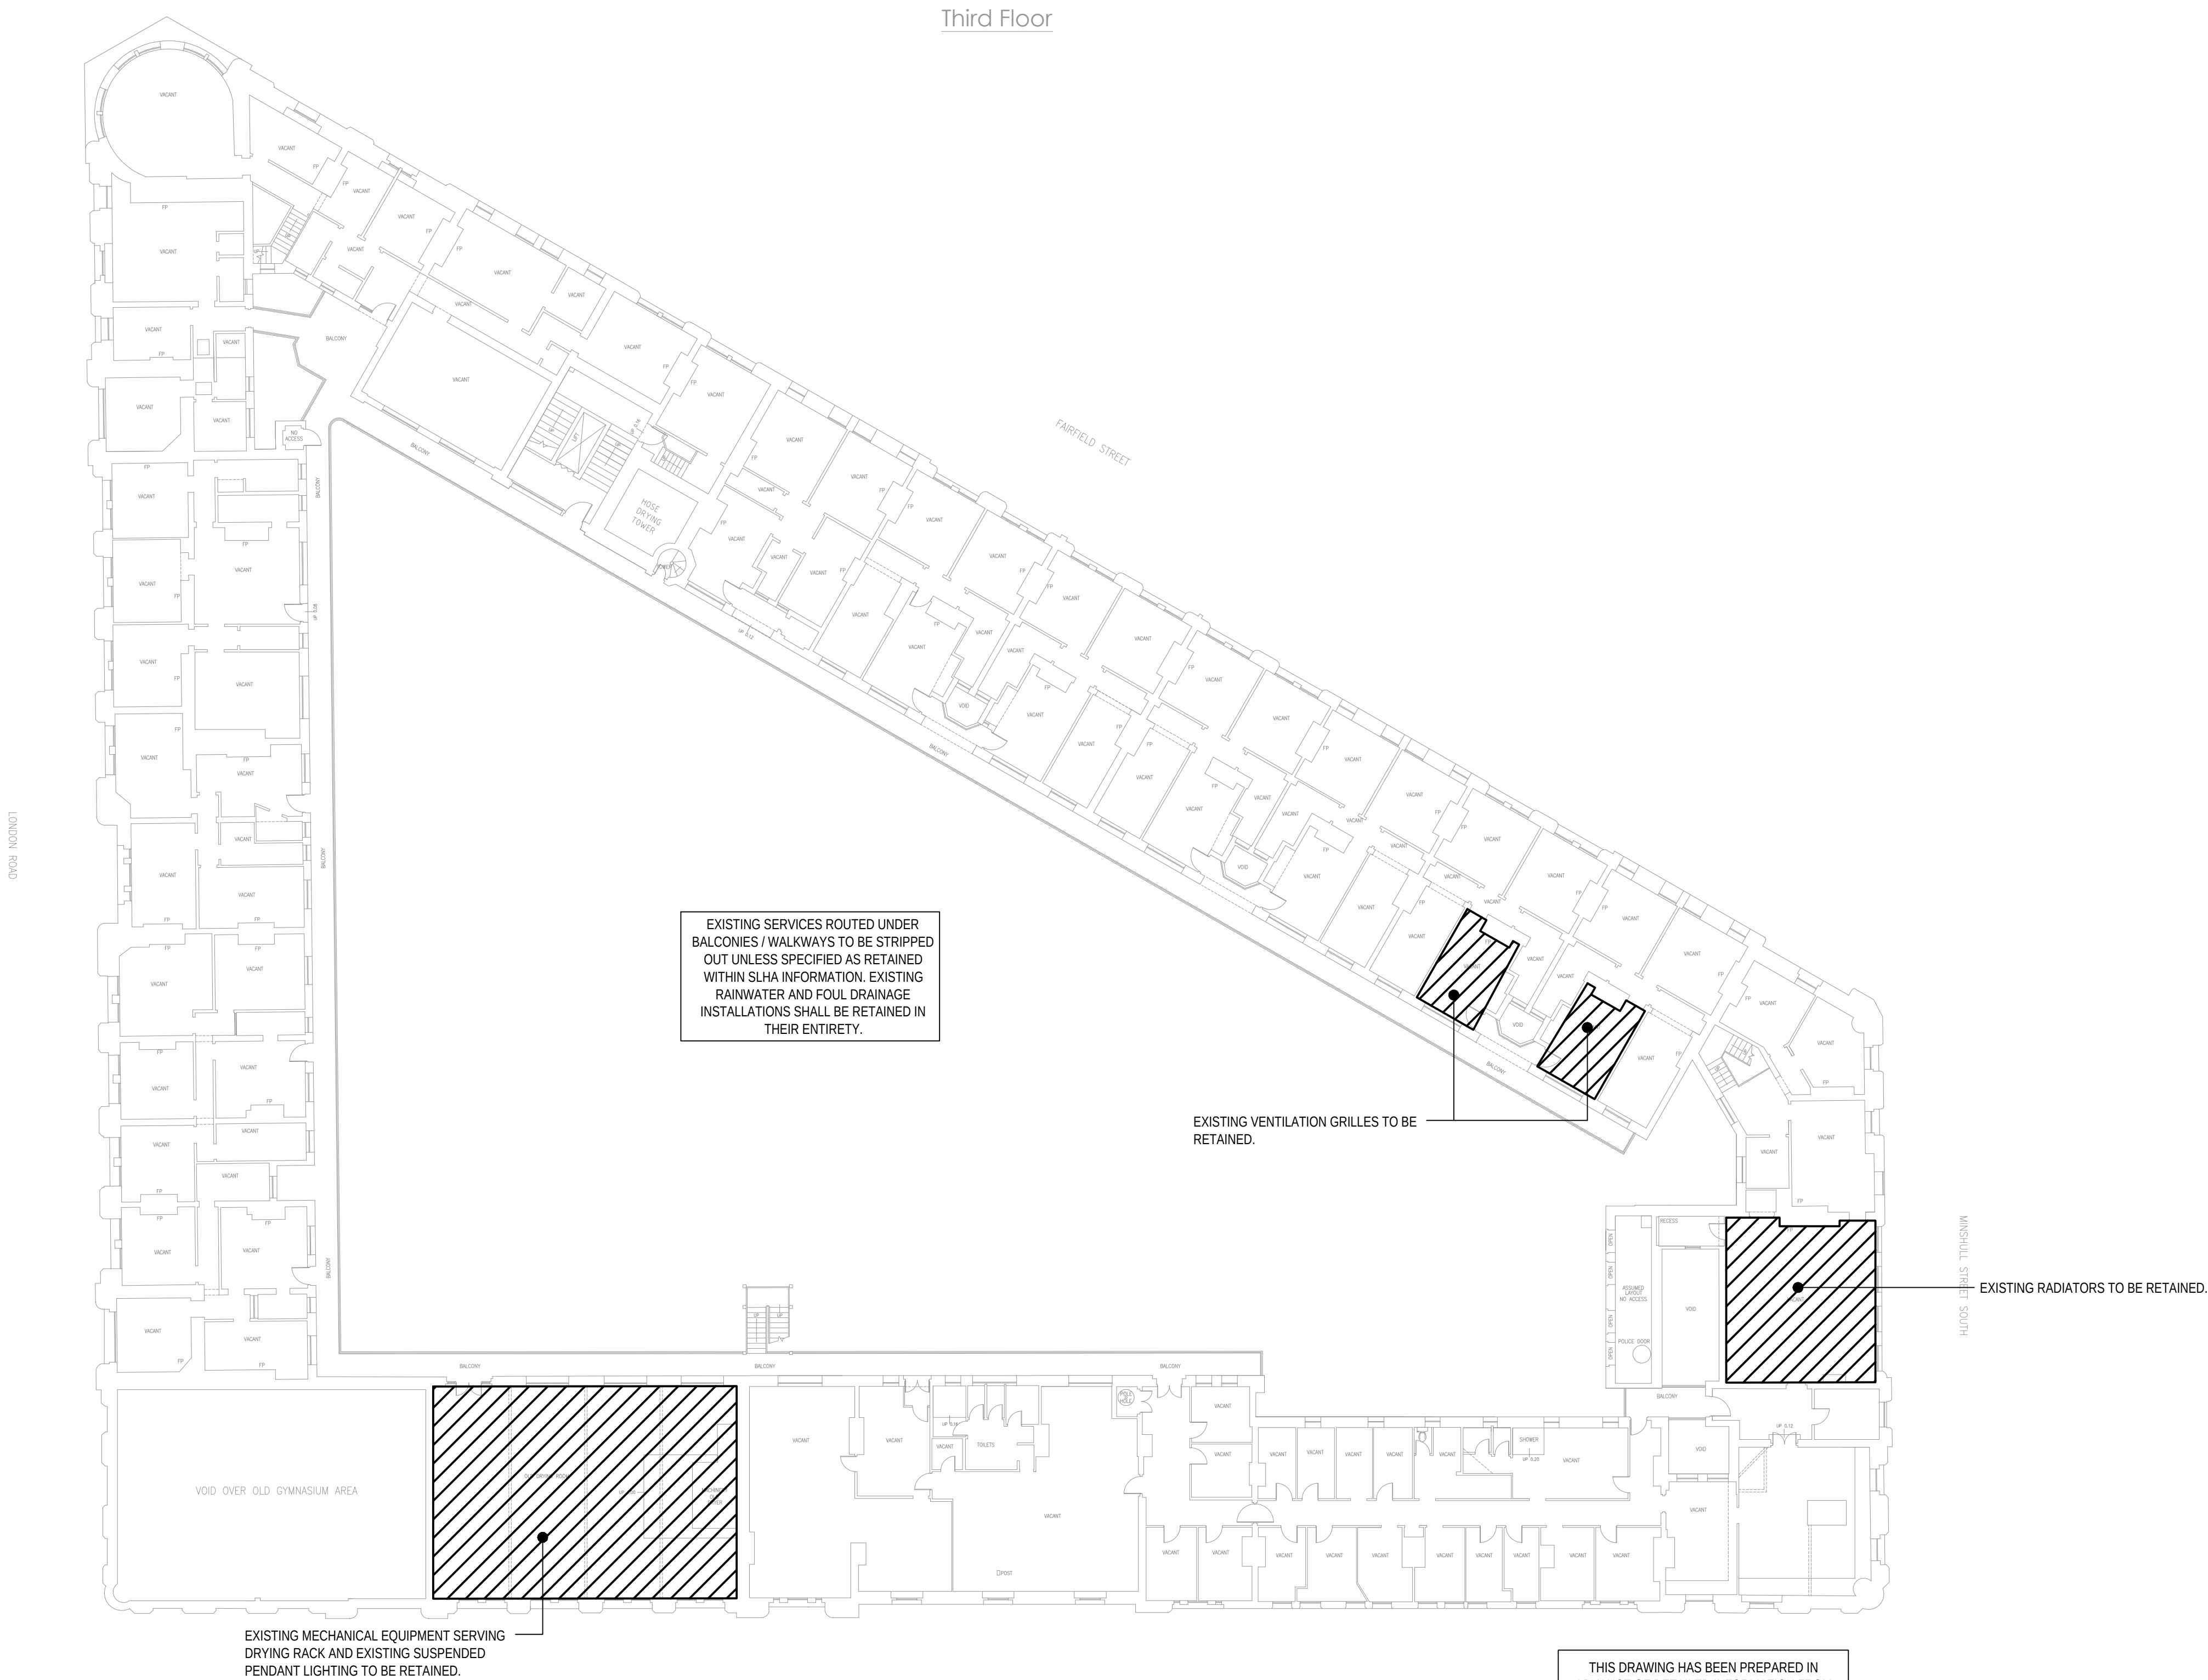

THIS DRAWING HAS BEEN PREPARED IN ADVANCE OF DETAILED INFORMATION FROM STEPHEN LEVRANT HERITAGE ARCHITECTURE AND THEREFORE THERE MAY BE ADDITIONAL M&E ITEMS TO BE RETAINED.