



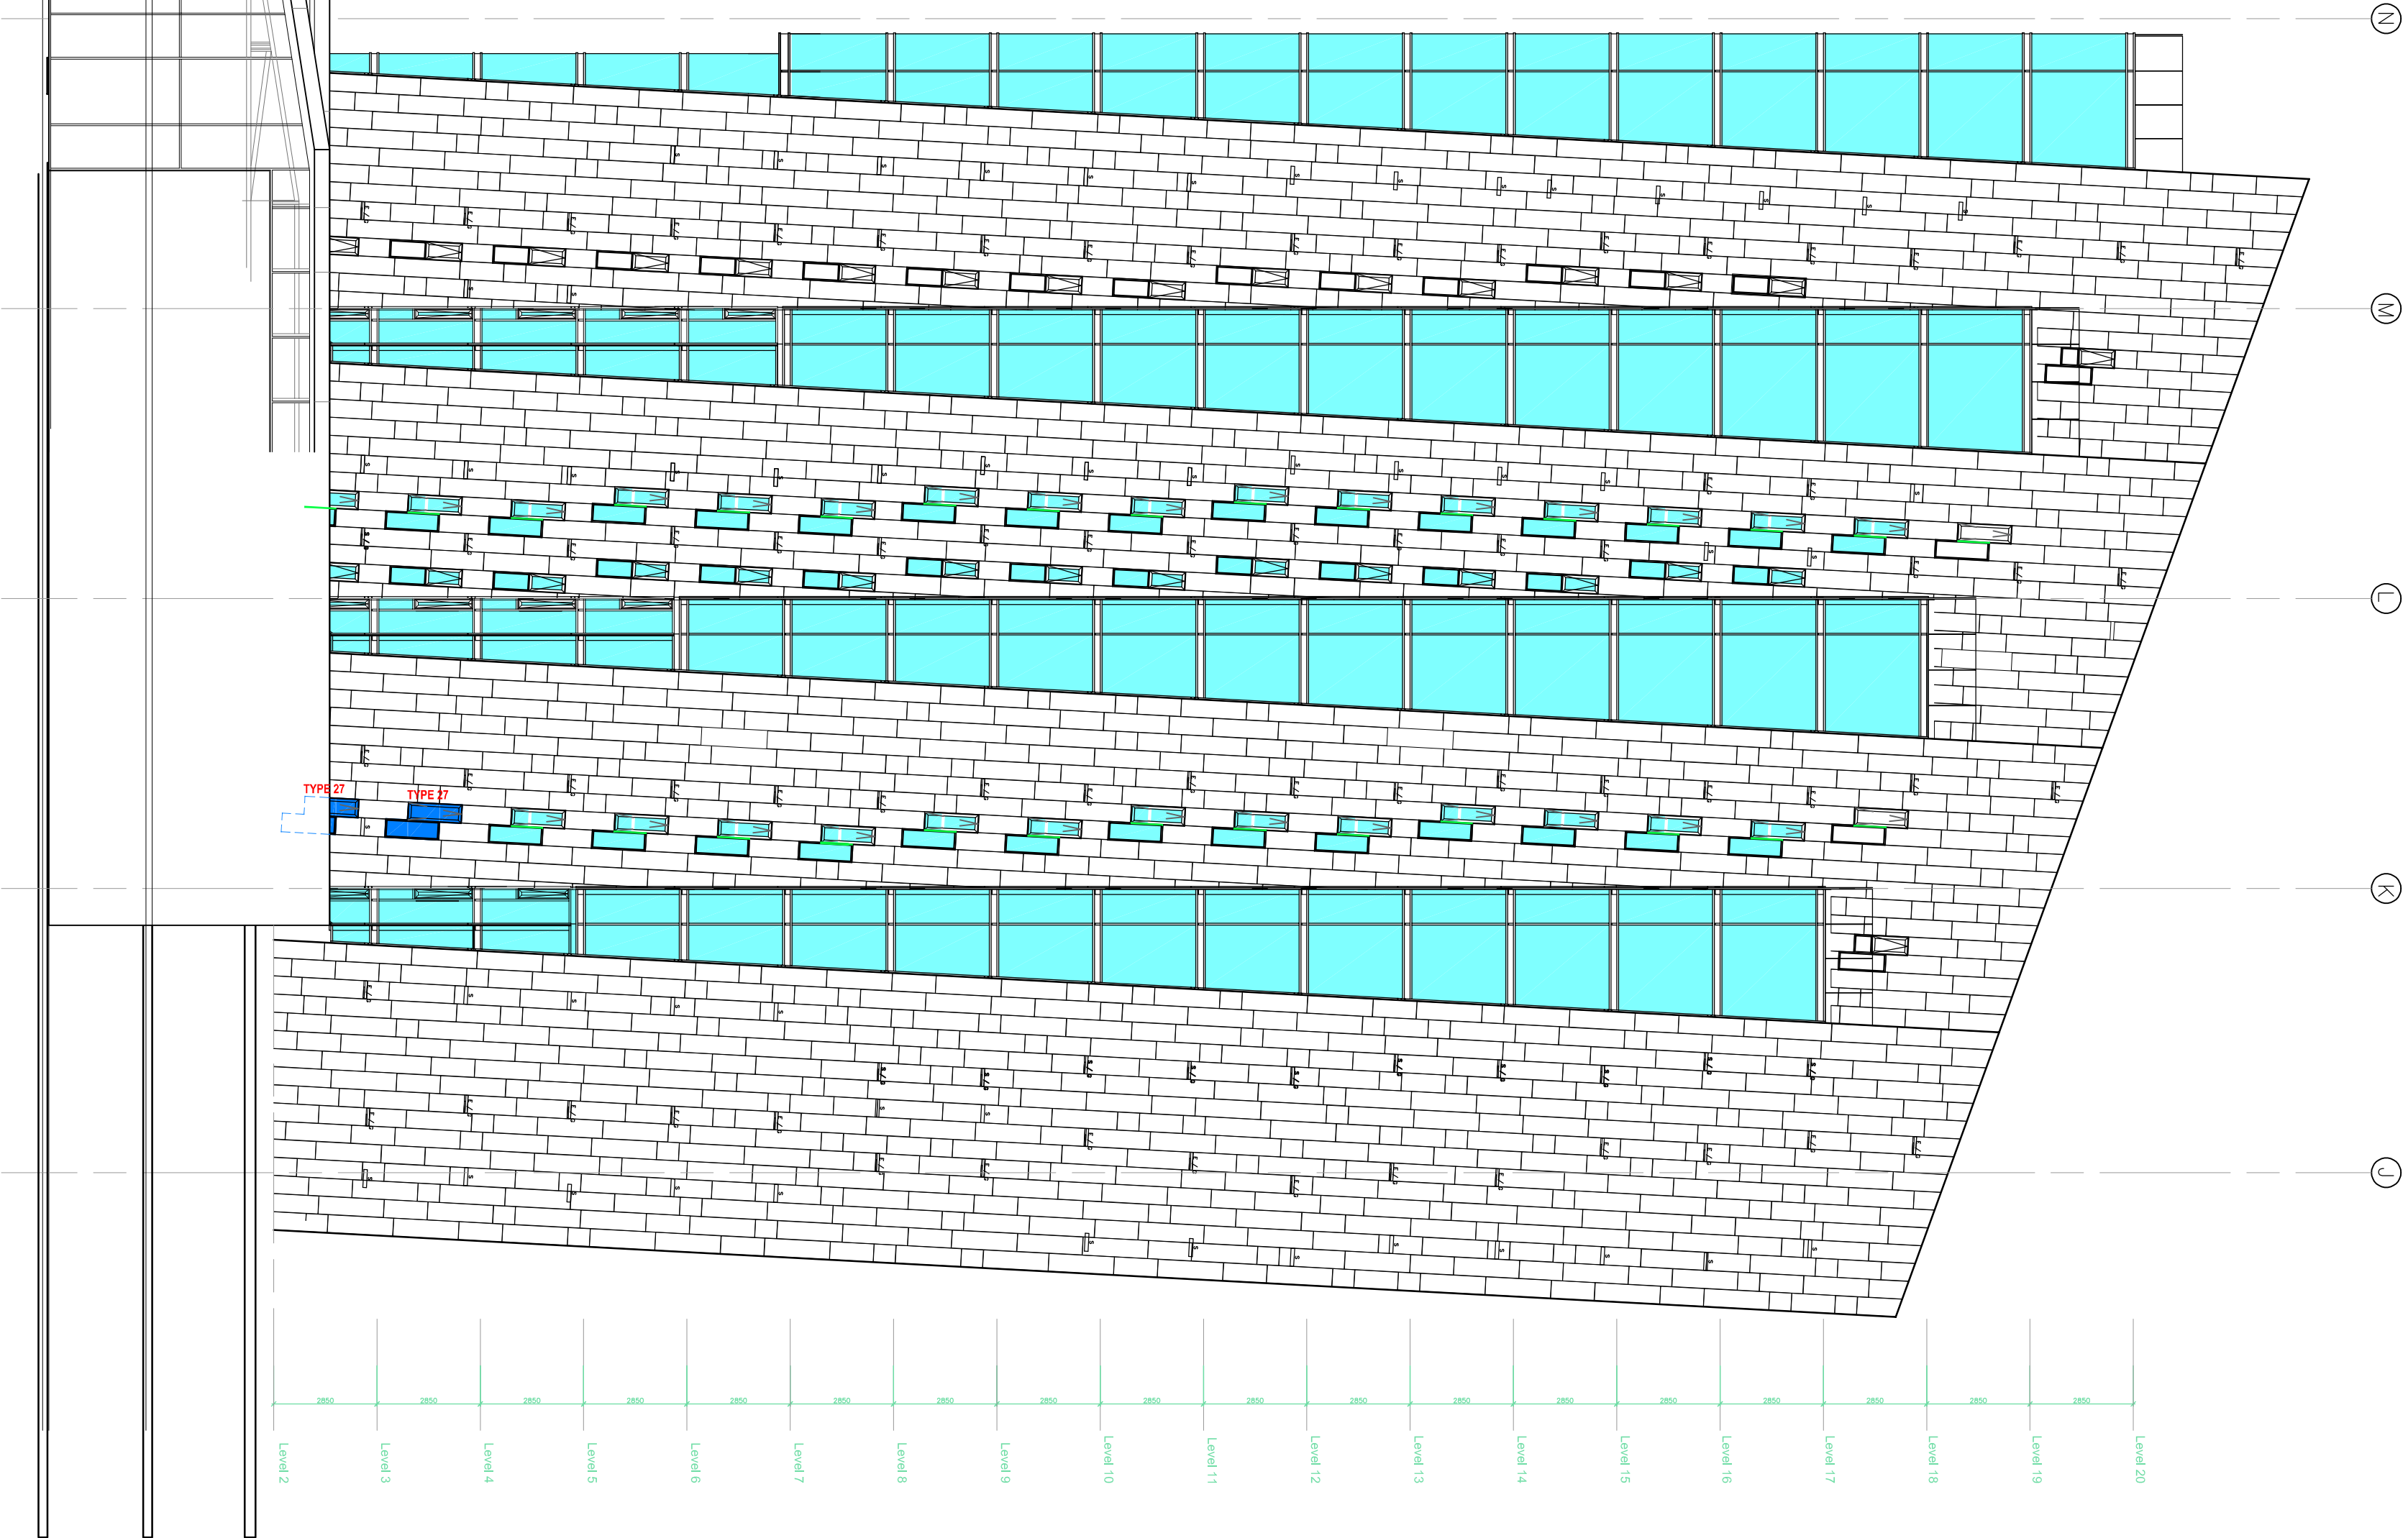

BLOCK B - Elevation C Reference Elevation

6	10/06/20	PLANNING REFUSE	1:1	1:1
5	09/06/20	Pre-work / post-submission to DC comments / Scope of work & revision notes	1:1	1:1
4	07/06/20	Pre-work	1:1	1:1
REV	DATE	REVISION NOTE	BY	CHECK



COLOUR KEY

Existing section of glazing replaced with new, single opening light to double opening light

Film applied to existing double glazed units

New vertical side guarding to opening lights

Scope of works:


New opening windows to be manufactured off site to match existing. All double glazed units to new windows to finished externally with 3M Prestige 40 film to match treatment to existing double glazed units. (new windows indicated in dark blue on reference elevation)

Application of solar control film externally to existing windows (indicated in light blue on reference elevation). Beading to be removed and re-instated once film is applied to full extent of double glazed unit. Any damaged elements in the course of the above to be replaced with new.



Floor spanner areas of curtain wall screens to be replaced with powder coated aluminum panels introducing mullions lining through with glazing verticals, all to match existing in colour and profile.

Type 27 window modification (11No.) - Replace existing windows with new 2 x 2no. stacked opening lights.

Type G (31No.) - Additional vertical guarding to be fixed externally to allow opening windows to open 100mm beyond outside face of cladding/brick.

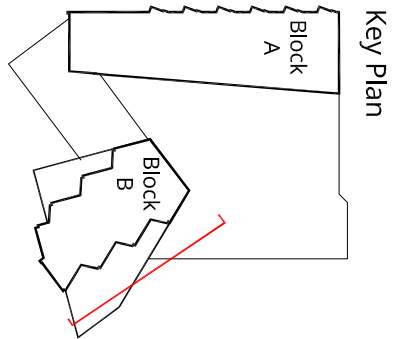


GLAZING ALTERATION TYPE 27

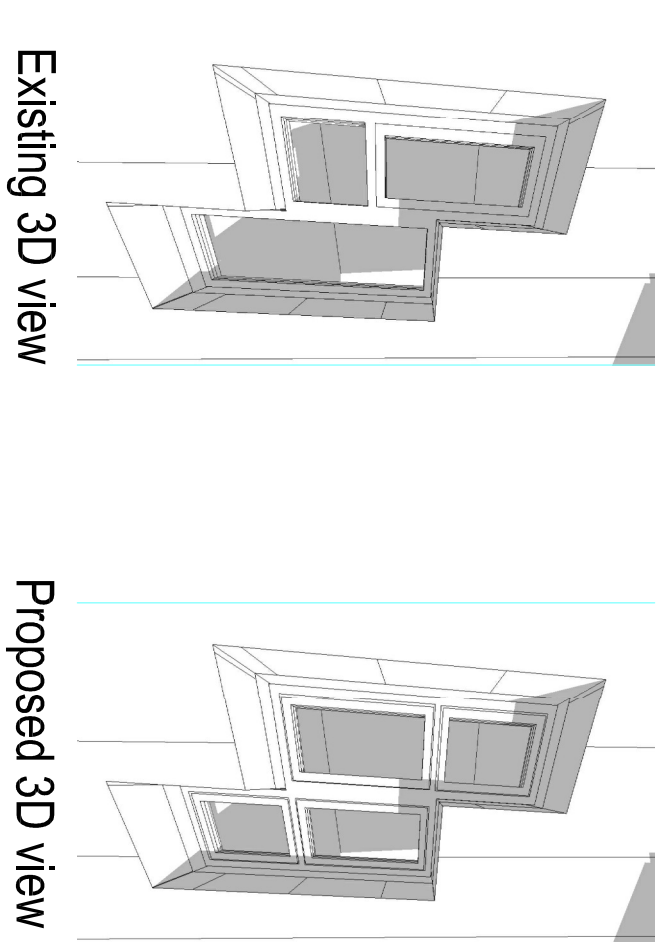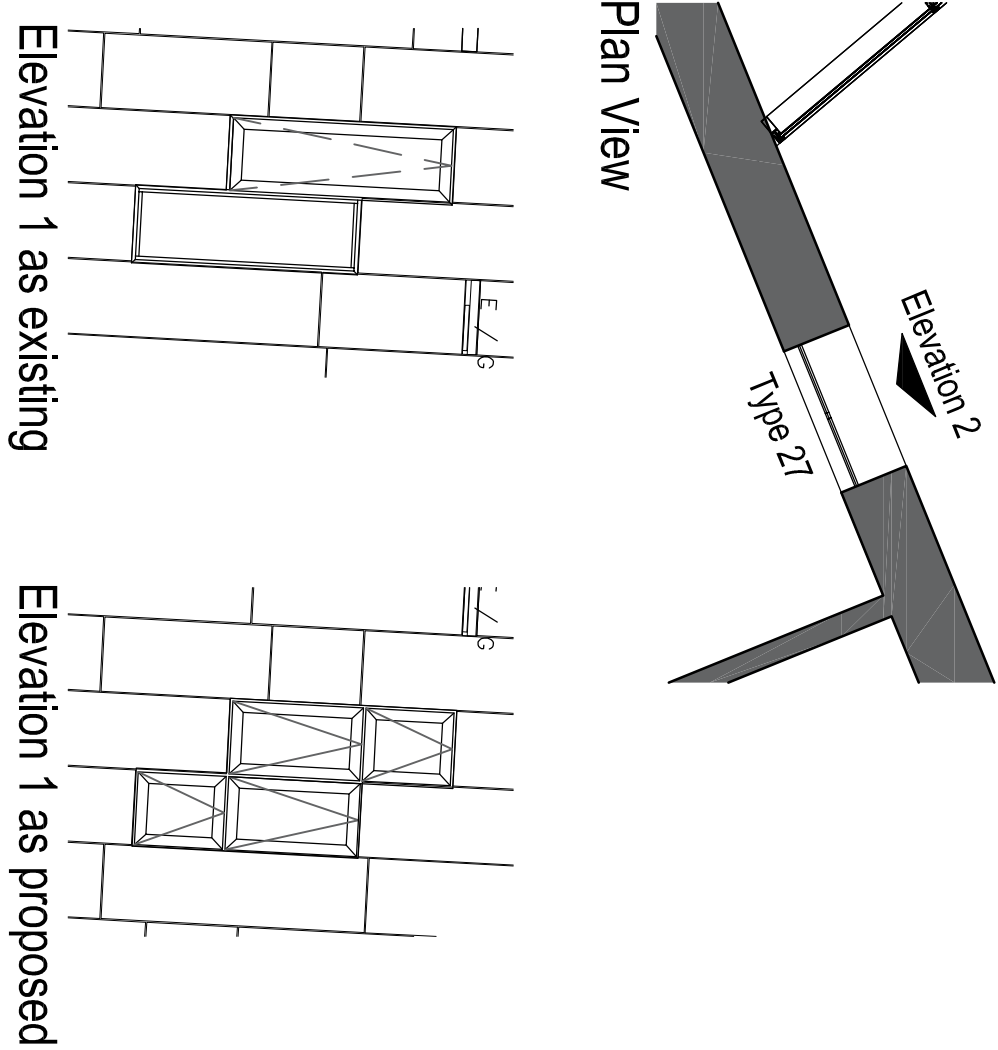

Type 27 window modification (2No.) - Replace existing windows with new 2 x 2no. stacked opening lights.

GLAZING ALTERATION TYPE G

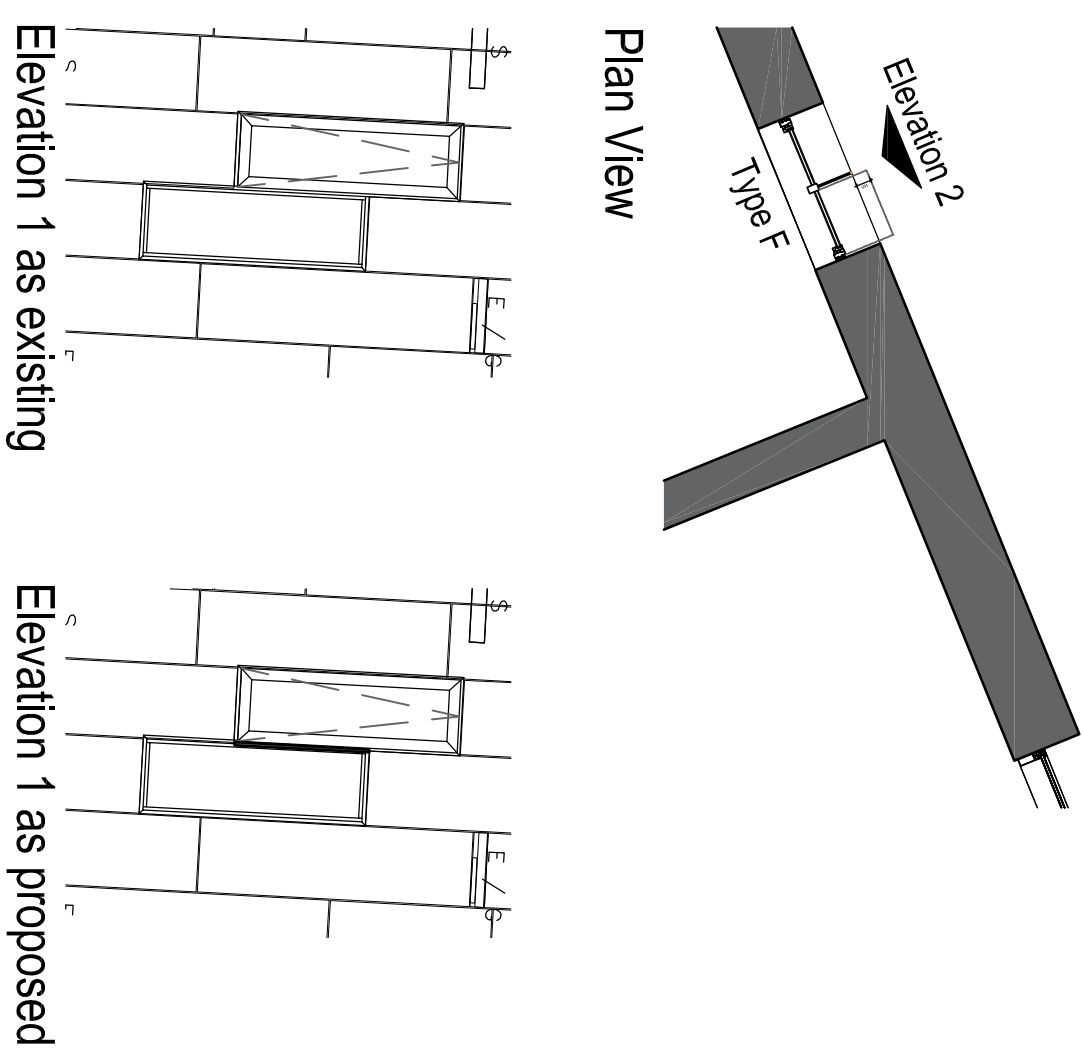

Existing 3D view

Proposed 3D view

Type G (31No.) - Additional vertical guarding to be fixed externally to allow opening windows to open 100mm beyond outside face of cladding/brick. Guarding to ensure there is no gap larger than 100mm to sides of opening windows. Detail in abeyance TBC