
Tesco Connected Display.

Express Window Screen Overview

Express Window Screens.




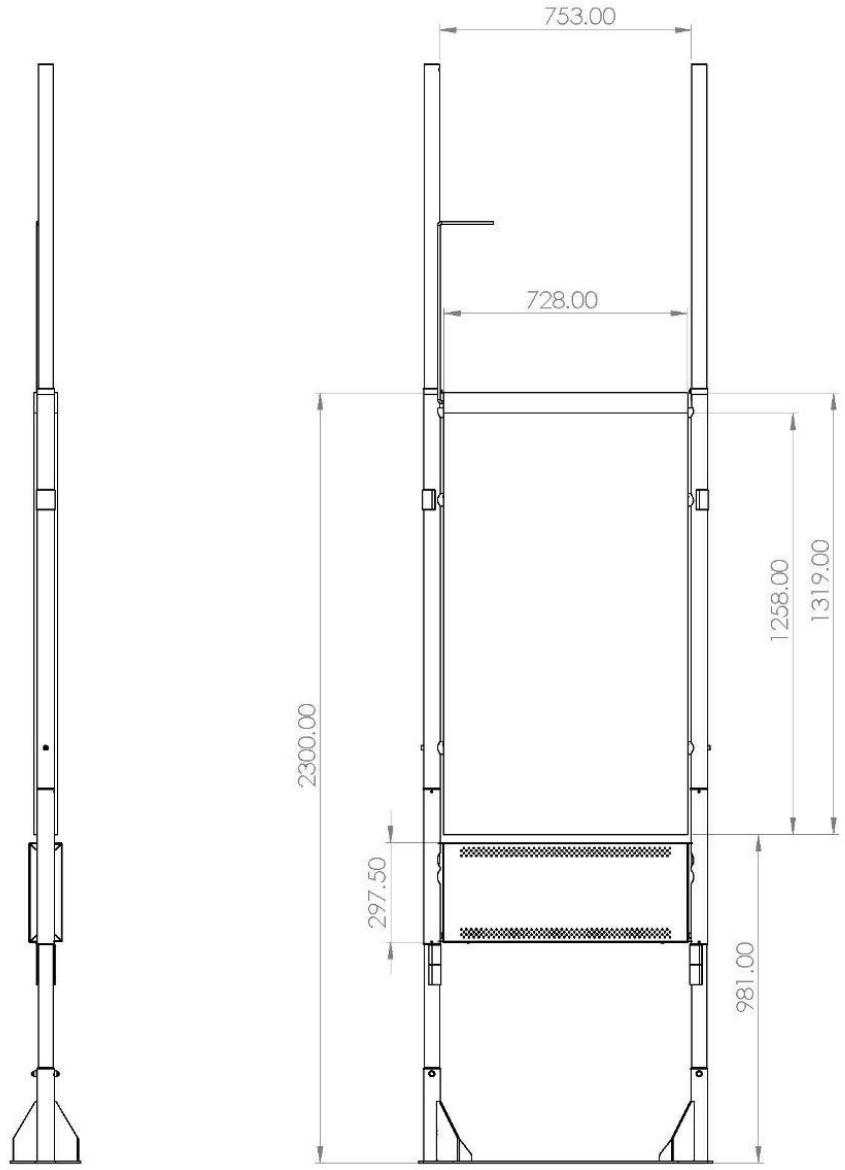

Unit construction Details

- Mild Steel Construction
- RAL code: RAL9005-S

Express Window Screens.

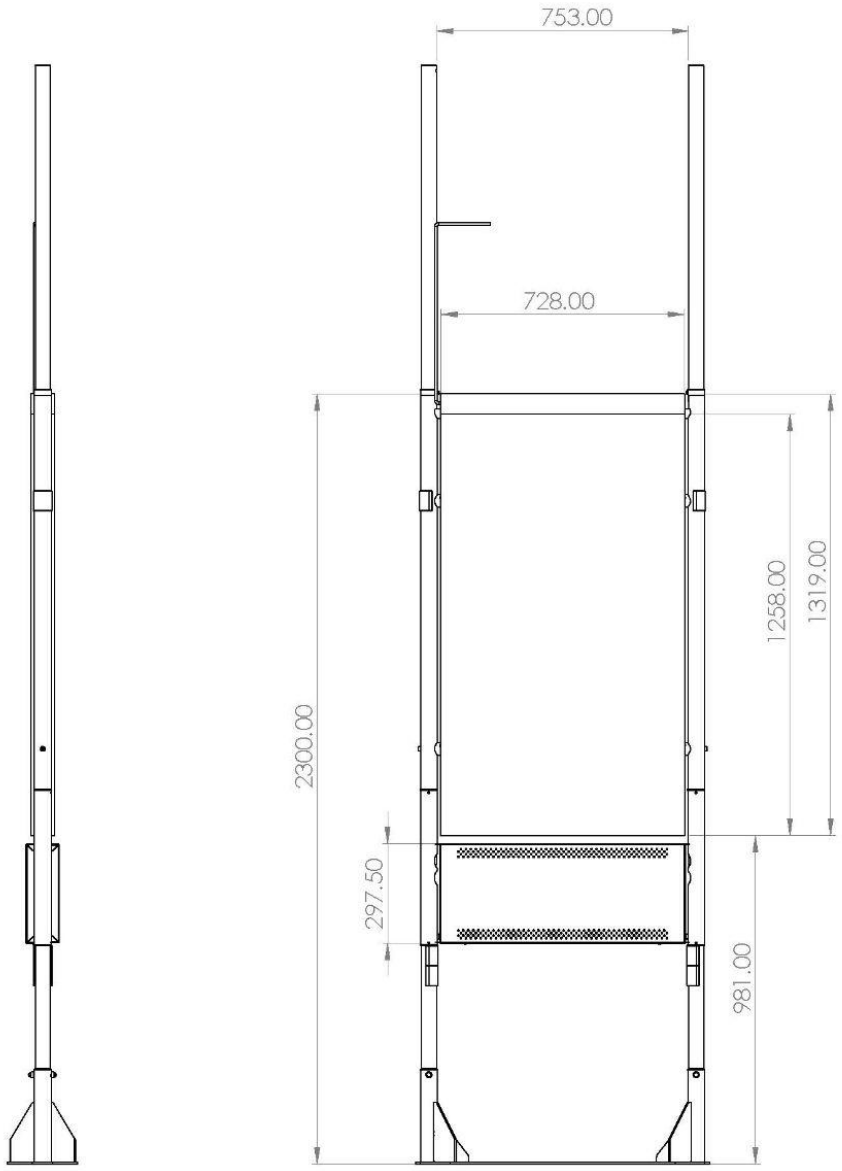

Screen brightness specification

- Brightness at max output 4000 nit (4000 cd/m2)
- 06:00 am - 12:00 am - Screen backlight set to 65% (typical 2600 cd/m2) - this is the max brightness and subject to nature of content on display
- 12:00am - 06:00am - Screen backlight set to 0% (negligible / 0 cd/m2)

Express Window Screens.

Clearance for installation in windows

When installing a semi-outdoor unit near windows, maintain the clearance to secure air flow.

- Clearance from windows (**A**):100mm or more
- Clearance from ceiling (**B**): 300mm or more
- Clearance from the floor (**C**): 100mm or more
- Ideal ambient temperature is 0 - 30°C, clear of obstacles that may affect airflow

If the unit is subjected to excess heat due to an insufficient gap, this may cause malfunctions and will not be covered by warranty.

