


LIGHTING SCHEDULE

Cut and Craft, Manchester | REV 04



14.02.2025



MISTRY LIGHTING

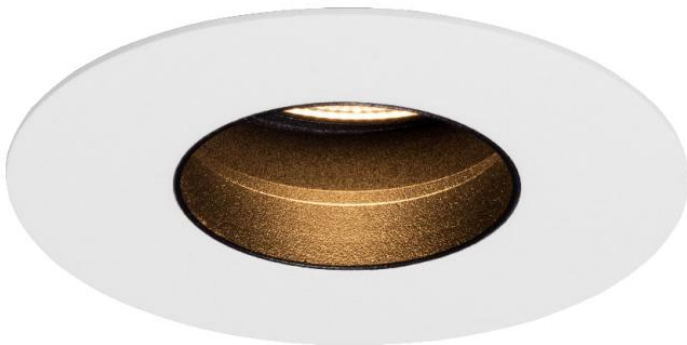**Driver**

ELDOLED SOLOdrive 360/A SL0360A6

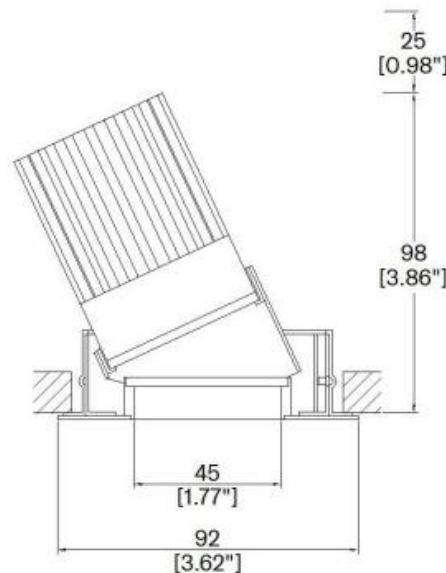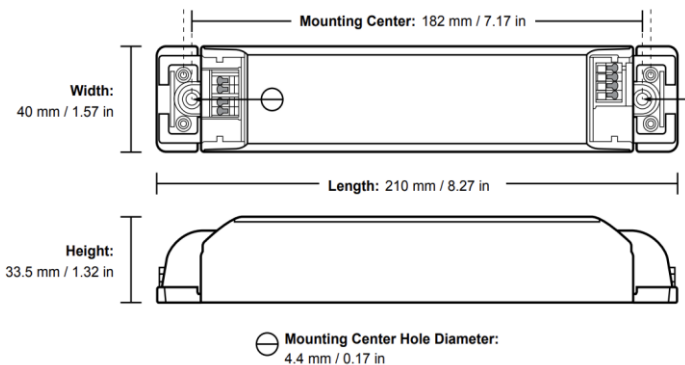

91413-A-LED + 9000-PBZ
Cut-out 83mm Ø

Product Name:	Prospex Edge 90 Accent
Product Code:	91413-A-LED-BK-54 - LED51/2-24-24-D-PBZ
Finish:	Black
Cut-out:	Ø 83mm
Dimensions:	Ø 92mm – (H) 98mm (25mm clearance)
Accessories:	Honeycomb Louvre
Wiring:	One driver per fitting
Drive Current:	350mA 33V
Wattage:	13.6W LED
Output:	759lm (24-degree Medium beam)
Lighting Controls:	Dali Dimmable
Colour Temperature:	2400K CRI 90+
IP Rating:	IP54

Application:

Ceiling recessed adjustable downlight with minimal glare. 24 degree Medium beam angle and 30 degree adjustability for accent lighting. Honeycomb Louvre required to reduce glare. Supplied with remote Dali dimmable driver from supplier.

Manufacturer: Lucent
Contact: Giovanni Premi
Email: giovanni@lucent-lighting.com
Tel: +44 20 8442 0880 / 07816171717


IMPORTANT NOTE

*ALL DIMENSIONS, ESPECIALLY CUTOUT DIMENSIONS, MUST BE CONFIRMED PRIOR TO WORKS COMMENCING ON SITE.
*ANY IMAGES PROVIDED ARE INDICATIVE, AND MAY NOT REFLECT THE COLOUR OR FINISH OF THE ACTUAL FITTING PROPOSED, OR SHOW ITEMS SUCH AS ACCESSORIES, LAMPS OR TRANSFORMERS WHICH MAY BE INCLUDED IN OUR COSTINGS AND BE REQUIRED TO OPERATE THE FITTING.

MISTRY LIGHTING



T: +44 (0)774715 3333
E: Krishna@mistrylighting.com
www.mistrylighting.com



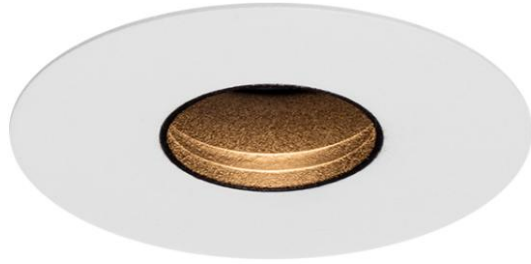

Driver

ELDOLED SOLOdrive 360/A SL0360A6

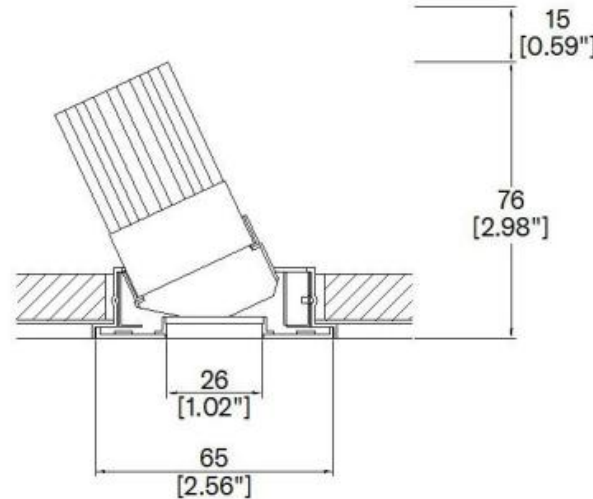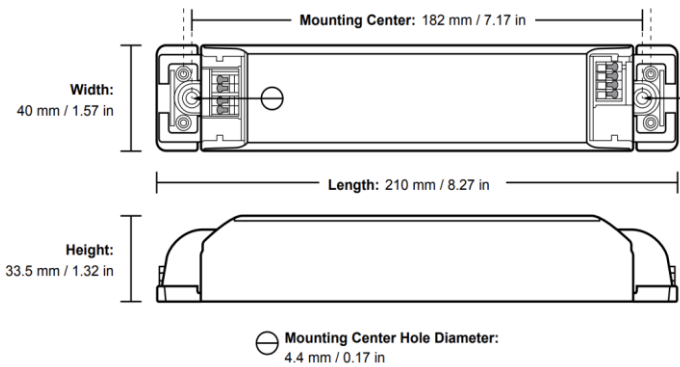

60413-A-LED + 6000-PCZ
Cut-out 60mm Ø

Product Name:	Prospex Edge 60 Accent
Product Code:	60413-A-LED-RAL-54 – LED35/2-24-15-D-PBZ
Finish:	RAL FINISH TBC
Cut-out:	Ø 60
Dimensions:	Ø 65mm – (H) 76mm (15mm clearance)
Accessories:	Honeycomb Louvre
Wiring:	One driver per fitting (Series)
Drive Current:	350mA 18V
Wattage:	7.4W LED
Output:	373lm (15 & 24-degree beam angles)
Lighting Controls:	Dali Dimmable
Colour Temperature:	2400K CRI 90+
IP Rating:	IP54

Application:

Ceiling recessed adjustable downlight with minimal glare. 15 degree Narrow beam angle and 30 degree adjustability for accent lighting. Honeycomb Louvre required to reduce glare. Supplied with remote Dali dimmable driver from supplier.

Manufacturer: Lucent

Contact: Giovanni Premi

Email: giovanni@lucent-lighting.com

Tel: +44 20 8442 0880 / 07816171717

IMPORTANT NOTE

*ALL DIMENSIONS, ESPECIALLY CUTOUT DIMENSIONS, MUST BE CONFIRMED PRIOR TO WORKS COMMENCING ON SITE.
*ANY IMAGES PROVIDED ARE INDICATIVE, AND MAY NOT REFLECT THE COLOUR OR FINISH OF THE ACTUAL FITTING PROPOSED, OR SHOW ITEMS SUCH AS ACCESSORIES, LAMPS OR TRANSFORMERS WHICH MAY BE INCLUDED IN OUR COSTINGS AND BE REQUIRED TO OPERATE THE FITTING.

MISTRY LIGHTING

T: +44 (0)774715 3333
E: Krishna@mistrylighting.com
www.mistrylighting.com





40mm (1.57") overall diameter. Fully recessed Micro40 downlight for interior installation. Up to 20° tilt. Family of matching products also available. Required depth height + 10mm[^]



ECOdrive 240/A-BIS

LED driver mechanical details

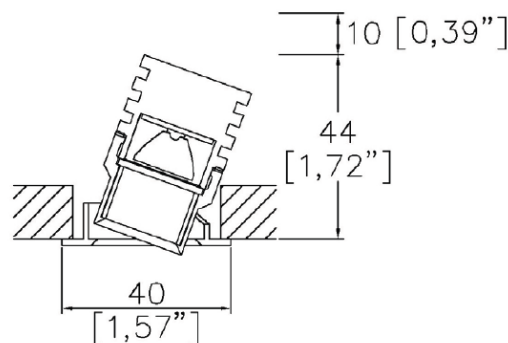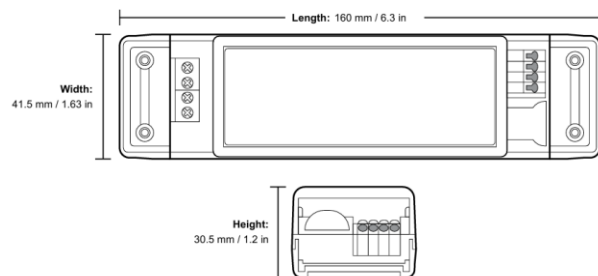

043-FA-TR
Cut-out 36mm Ø

Product Name:	Prospex Micro40 Focus Accent
Product Code:	043 FA-TR-27-RAL-25-D
Finish:	RAL FINISH TBC
Cut-out:	Ø 36mm
Dimensions:	Ø 40mm – (H) 44mm (+10mm gap)
Accessories:	EldoLED 20W Dali-2 remote driver
Wiring:	Wired in series.
Drive Current:	700mA 3V
Wattage:	2.6W LED
Output:	134lm (25 degrees)
Lighting Controls:	Dali Dimmable
Colour Temperature:	2700K
IP Rating:	IP20

Application:

A miniature round architectural downlight, utilised for accent lighting. Remote Dali driver required.

Driver runs 1-9 fittings wired in series

Please refer to manufacturers installation details for wiring. Driver to be located in an accessible and well ventilated space.

Manufacturer: Lucent

Contact: Giovanni Premi

Email: giovanni@lucent-lighting.com

Tel: +44 20 8442 0880 / 07816171717

IMPORTANT NOTE

*ALL DIMENSIONS, ESPECIALLY CUTOUT DIMENSIONS, MUST BE CONFIRMED PRIOR TO WORKS COMMENCING ON SITE.
*ANY IMAGES PROVIDED ARE INDICATIVE, AND MAY NOT REFLECT THE COLOUR OR FINISH OF THE ACTUAL FITTING PROPOSED, OR SHOW ITEMS SUCH AS ACCESSORIES, LAMPS OR TRANSFORMERS WHICH MAY BE INCLUDED IN OUR COSTINGS AND BE REQUIRED TO OPERATE THE FITTING.



T: +44 (0)774715 3333
E: Krishna@mistrylighting.com
www.mistrylighting.com

MISTRY LIGHTING



**ECodrive 240/A-BIS**

LED driver mechanical details

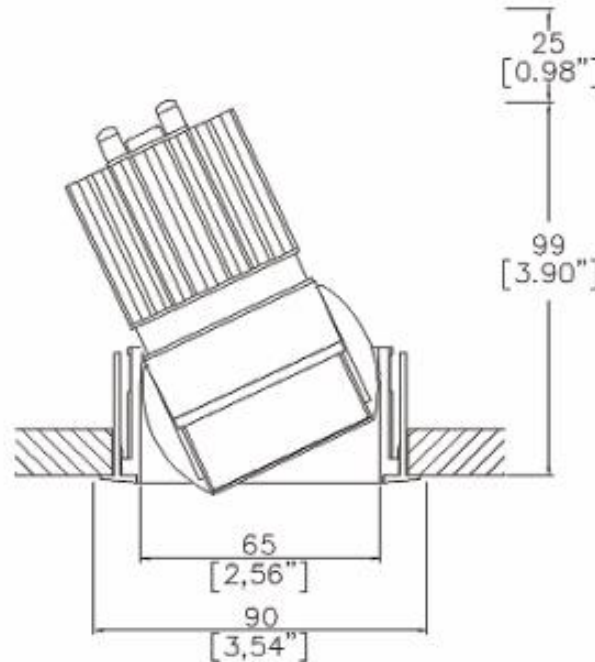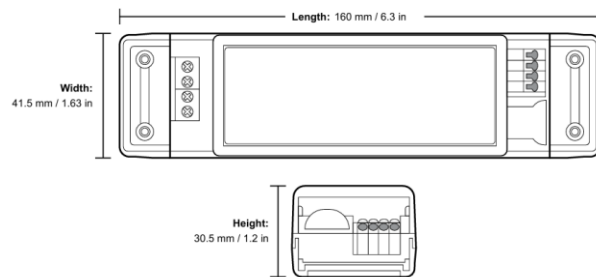

Product Name:	Occulus Accent Trim
Product Code:	OC010-TR1-BK01-BK01-LED51QO-27-FL-D
Finish:	Black
Cut-out:	Ø 82mm
Dimensions:	Ø 90mm – (H) 99+25mm
Accessories:	Honeycomb louvre
Wiring:	Remote Driver (Eldoled Ecodrive)
Drive Current:	200mA
Wattage:	8W LED
Output:	1036lm (34 degree beam angle)
Lighting Controls:	Dali Dimmable
Colour Temperature:	2700K CRI 90+
IP Rating:	IP54

Application:

A discreet round architectural downlight to illuminate art displays. Adjustable fitting with a high CRI. Honeycomb louvre to be used to reduce glare.

Manufacturer: Lucent
 Contact: Giovanni Premi
 Email: giovanni@lucent-lighting.com
 Tel: +44 20 8442 0880 / 07816171717


IMPORTANT NOTE

•ALL DIMENSIONS, ESPECIALLY CUTOUT DIMENSIONS, MUST BE CONFIRMED PRIOR TO WORKS COMMENCING ON SITE.
 •ANY IMAGES PROVIDED ARE INDICATIVE, AND MAY NOT REFLECT THE COLOUR OR FINISH OF THE ACTUAL FITTING PROPOSED, OR SHOW ITEMS SUCH AS ACCESSORIES, LAMPS OR TRANSFORMERS WHICH MAY BE INCLUDED IN OUR COSTINGS AND BE REQUIRED TO OPERATE THE FITTING.

MISTRY LIGHTING

T: +44 (0)774715 3333
 E: Krishna@mistrylighting.com
www.mistrylighting.com





Product Name:	LED Tape– 2200K
Product Code:	COB-LED-2200K
Finish:	N/A
Cut-out:	N/A
Dimensions:	As shown if used with profile.
Accessories:	Aluminium profile + PMMA opal cover
Wiring:	Remote Driver
Drive Current:	24V Ecoled driver
Wattage:	9.6W LED
Output:	920lm/m
Lighting Controls:	Dali Dimmable
Colour Temperature:	2200K CRI95
IP Rating:	IP54

Application:

Led tape mounted within a rigid profile with opal diffuser to illuminate architectural details and joinery.

Manufacturer to advise on suitable driver.

Please refer to manufacturers installation details for wiring. Driver to be located in an accessible and well ventilated space.

Manufacturer: Well Lit

Contact: Bujar




Email: bujar@lightson.design

Tel: 01484609759

IMPORTANT NOTE

*ALL DIMENSIONS, ESPECIALLY CUTOUT DIMENSIONS, MUST BE CONFIRMED PRIOR TO WORKS COMMENCING ON SITE.

*ANY IMAGES PROVIDED ARE INDICATIVE, AND MAY NOT REFLECT THE COLOUR OR FINISH OF THE ACTUAL FITTING PROPOSED, OR SHOW ITEMS SUCH AS ACCESSORIES, LAMPS OR TRANSFORMERS WHICH MAY BE INCLUDED IN OUR COSTINGS AND BE REQUIRED TO OPERATE THE FITTING.

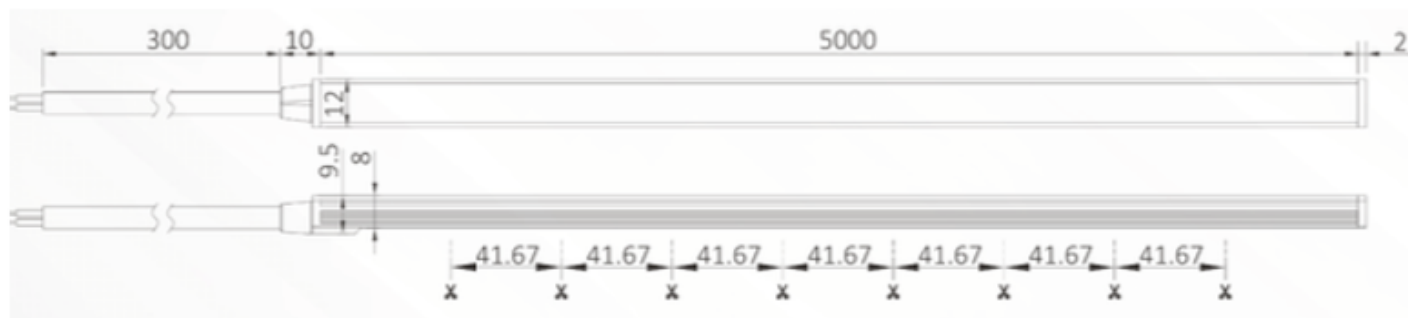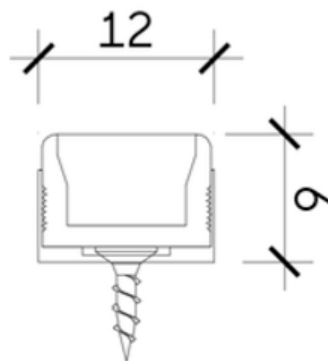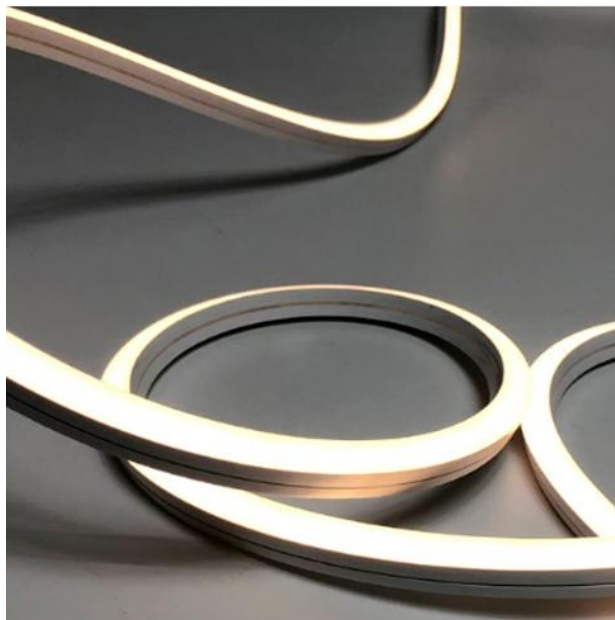

Product Name:	LED Neon Flex – 3D Top View Bendable
Product Code:	WL-NF2101
Finish:	N/A
Cut-out:	N/A
Dimensions:	12mm(W) X 9mm(H)
Accessories:	Mounting clips
Wiring:	Remote driver
Drive Current:	24V EcoLED Dali Driver
Wattage:	14.4W LED
Output:	1100lm
Lighting Controls:	Dali Dimmable
Colour Temperature:	2400K CRI90
IP Rating:	IP67

Application:

5M – Single end feed

10M – Fed from both ends

Side view homogenous encapsulated LED luminaire in 2200K colour temperature. Surface mounted using mounting clips for curved installations. Please use rigid profile for straight runs. Remote driver.

Manufacturer to advise on suitable driver.

Please refer to manufacturers installation details for wiring. Driver to be located in an accessible and well ventilated space.

Manufacturer: Well Lit

Contact: Bujar

Email: bujar@lightson.design

Tel: 01484609759


IMPORTANT NOTE

*ALL DIMENSIONS, ESPECIALLY CUTOUT DIMENSIONS, MUST BE CONFIRMED PRIOR TO WORKS COMMENCING ON SITE.

*ANY IMAGES PROVIDED ARE INDICATIVE, AND MAY NOT REFLECT THE COLOUR OR FINISH OF THE ACTUAL FITTING PROPOSED, OR SHOW ITEMS SUCH AS ACCESSORIES, LAMPS OR TRANSFORMERS WHICH MAY BE INCLUDED IN OUR COSTINGS AND BE REQUIRED TO OPERATE THE FITTING.



LD38C
Integrated linear anti-glare cowl,
supplied with special end caps
to further reduce glare from
the sides





/BSM Bracket side mounting



INSTALLATION

Measurements for mounting holes.

Allow an air gap between drivers and install in a well ventilated space.

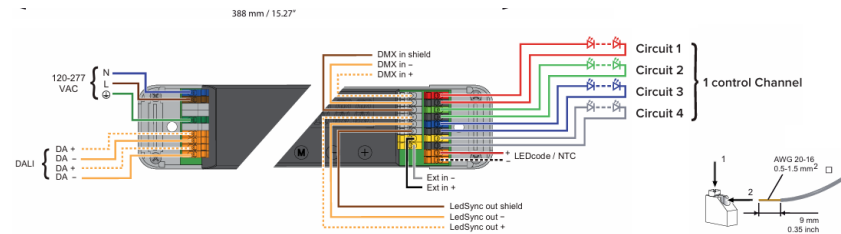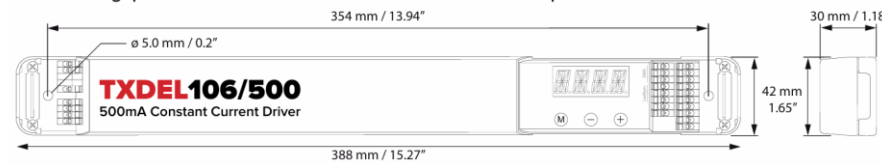

Product Name:	LD38C
Product Code:	LD38C-C1/500/LW27/OB/50/BSM/GL/PFBLK
Finish:	Black RAL9005
Cut-out:	N/A
Dimensions:	As shown
Accessories:	N/A
Wiring:	Remote Dali Driver
Drive Current:	240V 500mA
Wattage:	1000mm with 20 x 500mA 1.7W LED
Output:	2820lm/m 12° x 36° Oval Beam
Lighting Controls:	Dali Dimmable
Colour Temperature:	2700K
IP Rating:	IP67

Application:

External High Power Linear Lensed Surface Grazer & Floodlight with Integrated Anti-Glare Cowl: IP67: 500mA 1.7W LED: Extra Warm White 2700K: 12° x 36° Oval Lens: Paint Finish Black RAL9005: Linear anti-glare louvre. 1000mm and 500mm to be butted together per window.

Manufacturer to advise on suitable driver.

Please refer to manufacturers installation details for wiring. Driver to be located in an accessible and well ventilated space.

Manufacturer: Light Graphix

Contact: Dylan Parry +447340 399180

Email: Dylan@lightgraphix.biz

IMPORTANT NOTE

*ALL DIMENSIONS, ESPECIALLY CUTOUT DIMENSIONS, MUST BE CONFIRMED PRIOR TO WORKS COMMENCING ON SITE.

*ANY IMAGES PROVIDED ARE INDICATIVE, AND MAY NOT REFLECT THE COLOUR OR FINISH OF THE ACTUAL FITTING PROPOSED, OR SHOW ITEMS SUCH AS ACCESSORIES, LAMPS OR TRANSFORMERS WHICH MAY BE INCLUDED IN OUR COSTINGS AND BE REQUIRED TO OPERATE THE FITTING.

MISTRY LIGHTING

T: +44 (0)774715 3333
E: Krishna@mistrylighting.com
www.mistrylighting.com



TO BE CONFIRMED UPON JOINERY DESIGN
REQUIREMENTS.

Product Name:
Product Code:
Finish:
Cut-out:
Dimensions:
Accessories:
Wiring:
Drive Current:
Wattage:
Output:
Lighting Controls:
Colour Temperature:
IP Rating:



Application:

Manufacturer: LEDFLEX
Contact: Jessica Sewell - 0203 1377 305
Email: j.sewell@ledflexgroup.com

IMPORTANT NOTE

*ALL DIMENSIONS, ESPECIALLY CUTOUT DIMENSIONS, MUST BE CONFIRMED PRIOR TO WORKS COMMENCING ON SITE.
*ANY IMAGES PROVIDED ARE INDICATIVE, AND MAY NOT REFLECT THE COLOUR OR FINISH OF THE ACTUAL FITTING PROPOSED, OR SHOW ITEMS
SUCH AS ACCESSORIES, LAMPS OR TRANSFORMERS WHICH MAY BE INCLUDED IN OUR COSTINGS AND BE REQUIRED TO OPERATE THE FITTING.



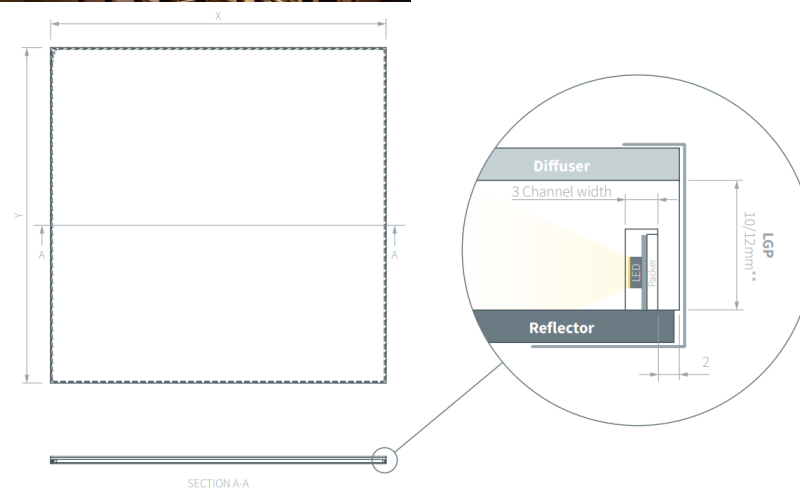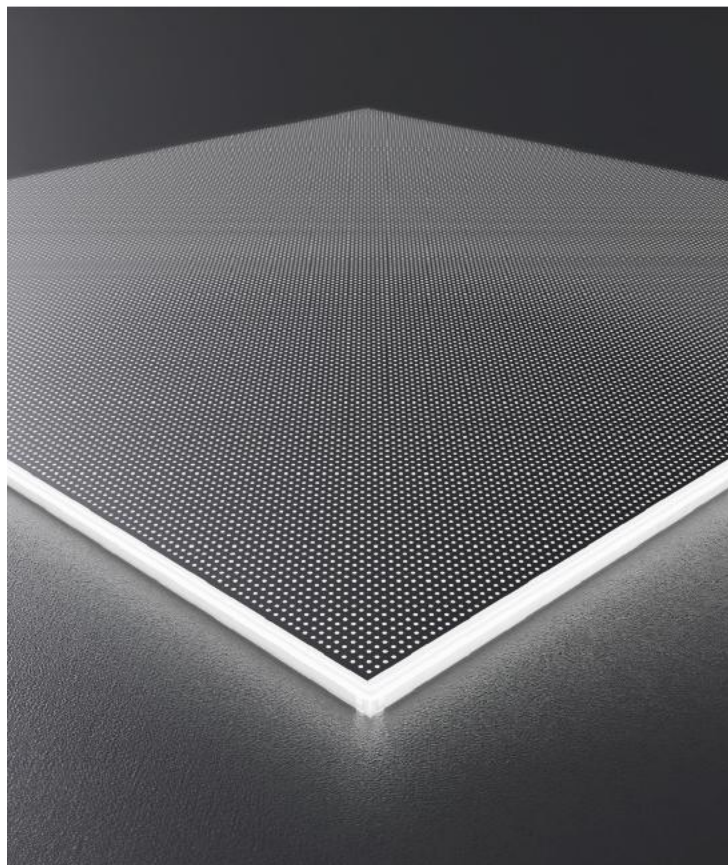

Product Name:	Light panel flux 10
Product Code:	LGP-24-14.4-2700
Finish:	Optical Grade Clear Acrylic (PMMA)
Cut-out:	N/A
Dimensions:	TBC Based on drawings.
Accessories:	N/A
Wiring:	Remote Dali driver
Drive Current:	24V
Wattage:	14.4W/m LED (per standard sheet)
Output:	1972lm/m
Lighting Controls:	Dali Dimmable
Colour Temperature:	3000K CRI 90+ (TBC on sample test)
IP Rating:	IP54

Application:

Backlit light box. Exact requirements to be discussed with the manufacturer based on joinery drawings.

Manufacturer to advise on suitable driver.

Please refer to manufacturers installation details for wiring. Driver to be located in an accessible and well ventilated space.

Manufacturer: UniBox

Contact: Matt Burns

Email: matt.burns@unibox.co.uk

Tel: +44 7891492626

IMPORTANT NOTE


*ALL DIMENSIONS, ESPECIALLY CUTOUT DIMENSIONS, MUST BE CONFIRMED PRIOR TO WORKS COMMENCING ON SITE.

*ANY IMAGES PROVIDED ARE INDICATIVE, AND MAY NOT REFLECT THE COLOUR OR FINISH OF THE ACTUAL FITTING PROPOSED, OR SHOW ITEMS SUCH AS ACCESSORIES, LAMPS OR TRANSFORMERS WHICH MAY BE INCLUDED IN OUR COSTINGS AND BE REQUIRED TO OPERATE THE FITTING.

MISTRY LIGHTING

T: +44 (0)774715 3333
E: Krishna@mistrylighting.com
www.mistrylighting.com







Honeycomb Louvre

Driver

ELDOLED SOLOdrive 360/A SL0360A6

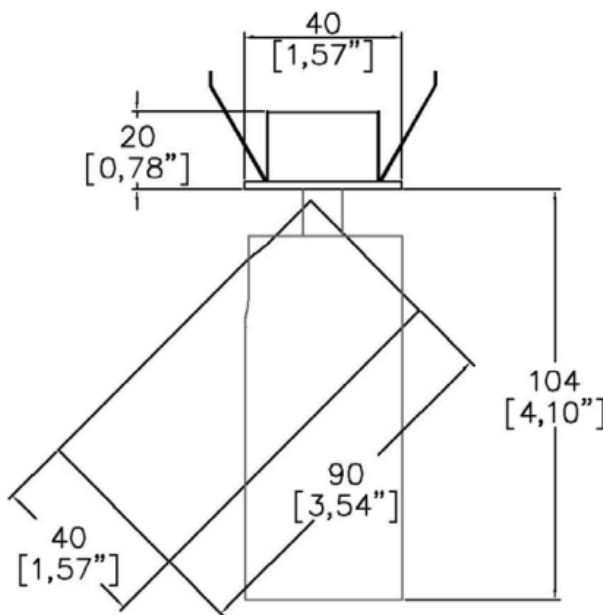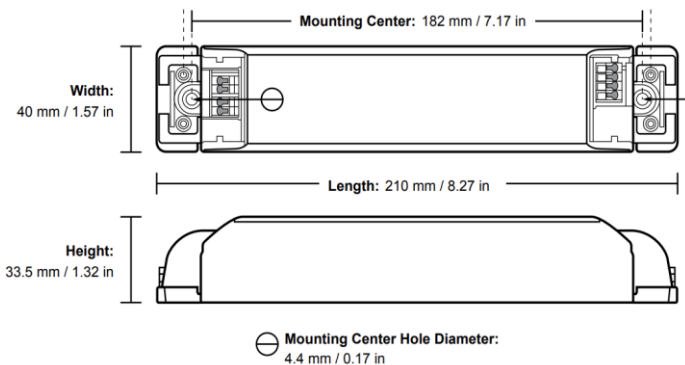

6100-LED-RMP
Cut out 35mm Ø

Product Name:	Prospex TubeLED Micro Monopoint
Product Code:	6100-24-24-D-RAL-RMP
Finish:	RAL FINISH TBC
Cut-out:	Ø 35mm
Dimensions:	Ø 40mm – (H) 104mm
Accessories:	Honeycomb louvre
Wiring:	EldoLED Dali remote driver
Drive Current:	350mA 18V
Wattage:	7.4W LED
Output:	439lm (15 & 24 degree beam angles)
Lighting Controls:	Dali Dimmable
Colour Temperature:	2400K CRI 90+
IP Rating:	IP20

Application:

Recessed adjustable spotlight with remote driver.
Honeycomb louvre is required to reduce glare

1 driver per fitting. Please refer to manufacturers installation details for wiring. Driver to be located in an accessible and well ventilated space.

Manufacturer: Lucent
Contact: Giovanni Premi
Email: giovanni@lucent-lighting.com
Tel: +44 20 8442 0880 / 07816171717

IMPORTANT NOTE

*ALL DIMENSIONS, ESPECIALLY CUTOUT DIMENSIONS, MUST BE CONFIRMED PRIOR TO WORKS COMMENCING ON SITE.
*ANY IMAGES PROVIDED ARE INDICATIVE, AND MAY NOT REFLECT THE COLOUR OR FINISH OF THE ACTUAL FITTING PROPOSED, OR SHOW ITEMS SUCH AS ACCESSORIES, LAMPS OR TRANSFORMERS WHICH MAY BE INCLUDED IN OUR COSTINGS AND BE REQUIRED TO OPERATE THE FITTING.



MISTRY LIGHTING

T: +44 (0)774715 3333
E: Krishna@mistrylighting.com
www.mistrylighting.com



**Driver**

ELDOLED SOLOdrive 360/A SL0360A6

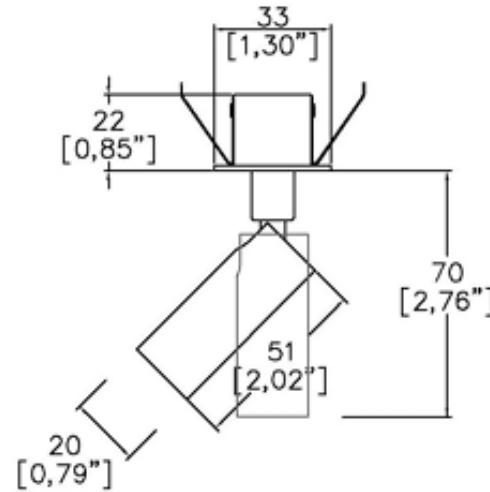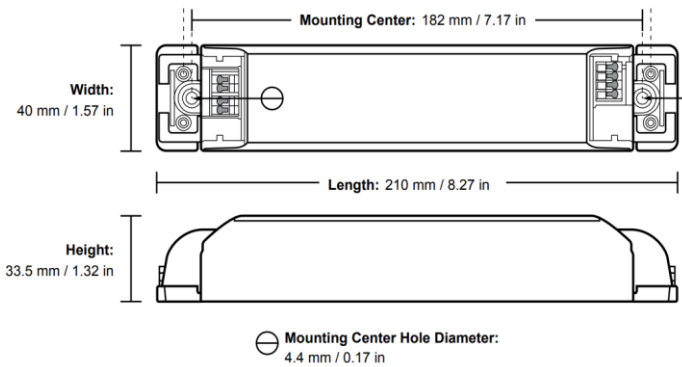**1100-LED-RMP**

Driver can be mounted max 5M away from light source

Product Name:	ProSpex TubeLED Nano (Recessed)
Product Code:	1100-LED-27-25-D-BLACK- RMP
Finish:	Black
Cut-out:	Ø 26mm
Dimensions:	As Shown
Accessories:	N/A
Wiring:	Remote Dali driver
Drive Current:	700mA 3V
Wattage:	2.6W LED
Output:	135.3 (25-degree Beam Angle)
Lighting Controls:	Dali Dimmable
Colour Temperature:	2700K CRI 90
IP Rating:	IP20

Application:

Recessed miniature spotlight to illuminate statues.
Remote driver required.

Driver runs max 4 fittings wired in series per driver

Please refer to manufacturers installation details for wiring. Driver to be located in an accessible and well ventilated space.

Manufacturer: Lucent

Contact: Giovanni Premi

Email: giovanni@lucent-lighting.com

Tel: +44 20 8442 0880 / 07816171717




IMPORTANT NOTE

*ALL DIMENSIONS, ESPECIALLY CUTOUT DIMENSIONS, MUST BE CONFIRMED PRIOR TO WORKS COMMENCING ON SITE.
*ANY IMAGES PROVIDED ARE INDICATIVE, AND MAY NOT REFLECT THE COLOUR OR FINISH OF THE ACTUAL FITTING PROPOSED, OR SHOW ITEMS SUCH AS ACCESSORIES, LAMPS OR TRANSFORMERS WHICH MAY BE INCLUDED IN OUR COSTINGS AND BE REQUIRED TO OPERATE THE FITTING.

MISTRY LIGHTING

T: +44 (0)774715 3333
E: Krishna@mistrylighting.com
www.mistrylighting.com



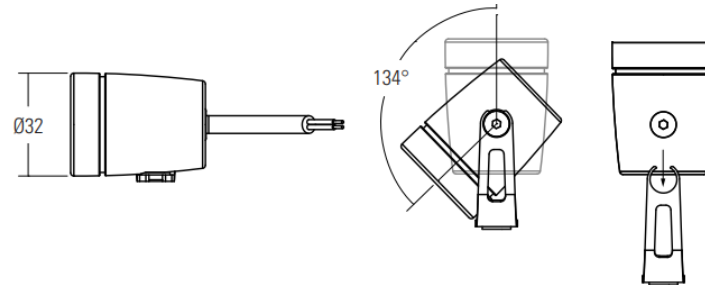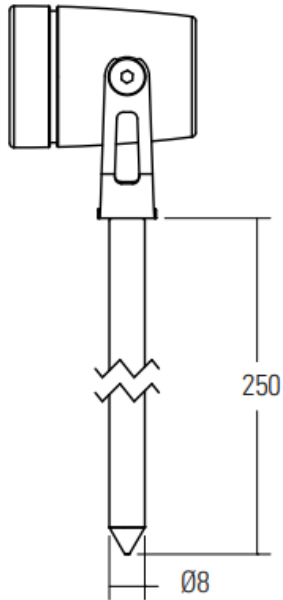


DRIVER DIMENSION - TXDEL700DALI

INSTALLATION

Measurements for mounting holes.

Allow an air gap between drivers and install in a well ventilated space.

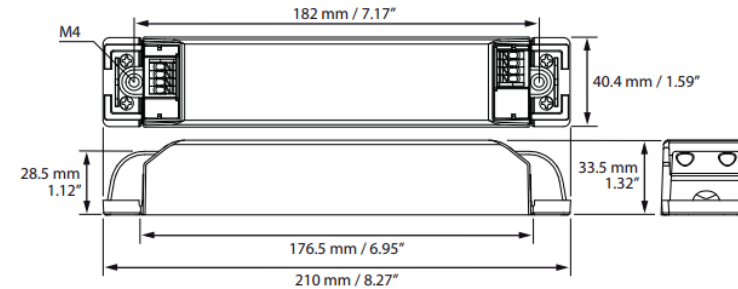

Product Name:	LD51-C1- GS
Product Code:	LED51-C1-700-LW27-MB/RAL9005-/GS
Finish:	Black – RAL9005
Cut-out:	N/A
Dimensions:	As shown
Accessories:	Cowl.
Wiring:	Constant current (series)
Drive Current:	700mA 240V
Wattage:	2.4W LED
Output:	188lm (31-degree Medium beam angle)
Lighting Controls:	Dali Dimmable
Colour Temperature:	2700K CRI 90+
IP Rating:	IP67

Application:

Spike mounted spotlight to illuminate planting inside plant pots. Remote Dali driver. Driver runs 1-13 x 2.4W LEDs.

TBC MOUNTING OPTION – depending on loose or bonded gravel.

Manufacturer to advise on suitable driver.

Please refer to manufacturers installation details for wiring. Driver to be located in an accessible and well ventilated space.

Manufacturer: Light Graphix

Contact: Dylan Parry +447340 399180

Email: Dylan@lightgraphix.biz

IMPORTANT NOTE


*ALL DIMENSIONS, ESPECIALLY CUTOUT DIMENSIONS, MUST BE CONFIRMED PRIOR TO WORKS COMMENCING ON SITE.

*ANY IMAGES PROVIDED ARE INDICATIVE, AND MAY NOT REFLECT THE COLOUR OR FINISH OF THE ACTUAL FITTING PROPOSED, OR SHOW ITEMS SUCH AS ACCESSORIES, LAMPS OR TRANSFORMERS WHICH MAY BE INCLUDED IN OUR COSTINGS AND BE REQUIRED TO OPERATE THE FITTING.




/HC51 Anti-glare half cowl

With the aid of an O-ring the aluminium cowl is securely fitted to the LD51.
This allows it to be rotated in any direction to reduce glare.

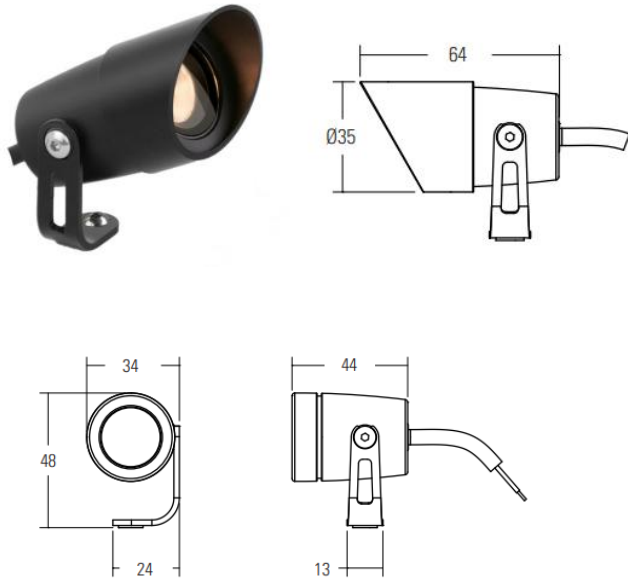**DRIVER DIMENSION - TXDEL700DALI****INSTALLATION**

Measurements for mounting holes.

Allow an air gap between drivers and install in a well ventilated space.

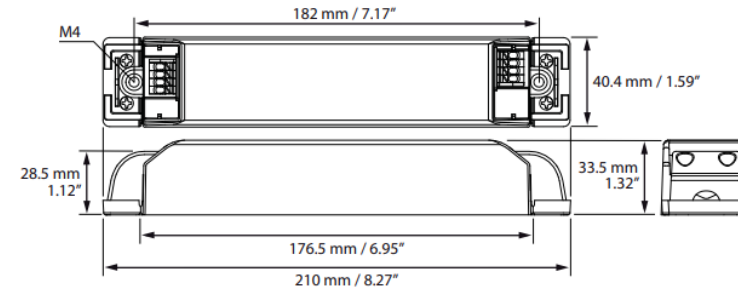

Product Name:	LD51-C1
Product Code:	LED51-C1-700-LW27-MB/RAL9005-/HC51
Finish:	Black – RAL9005
Cut-out:	N/A
Dimensions:	As shown
Accessories:	Anti-glare half cowl
Wiring:	Constant current (series)
Drive Current:	700mA 240V
Wattage:	2.4W LED
Output:	188lm (31-degree Medium beam angle)
Lighting Controls:	Dali Dimmable
Colour Temperature:	2700K CRI 90+
IP Rating:	IP67

Application:

Surface mounted spotlight to illuminate planting inside plant pots.
Remote Dali driver. Driver runs 1-13 x 2.4W LEDs.

Manufacturer to advise on suitable driver.

Please refer to manufacturers installation details for wiring. Driver to be located in an accessible and well ventilated space.

Manufacturer: Light Graphix

Contact: Dylan Parry +447340 399180

Email: Dylan@lightgraphix.biz


IMPORTANT NOTE

*ALL DIMENSIONS, ESPECIALLY CUTOUT DIMENSIONS, MUST BE CONFIRMED PRIOR TO WORKS COMMENCING ON SITE.
*ANY IMAGES PROVIDED ARE INDICATIVE, AND MAY NOT REFLECT THE COLOUR OR FINISH OF THE ACTUAL FITTING PROPOSED, OR SHOW ITEMS SUCH AS ACCESSORIES, LAMPS OR TRANSFORMERS WHICH MAY BE INCLUDED IN OUR COSTINGS AND BE REQUIRED TO OPERATE THE FITTING.

MISTRY LIGHTING

T: +44 (0)774715 3333
E: Krishna@mistrylighting.com
www.mistrylighting.com




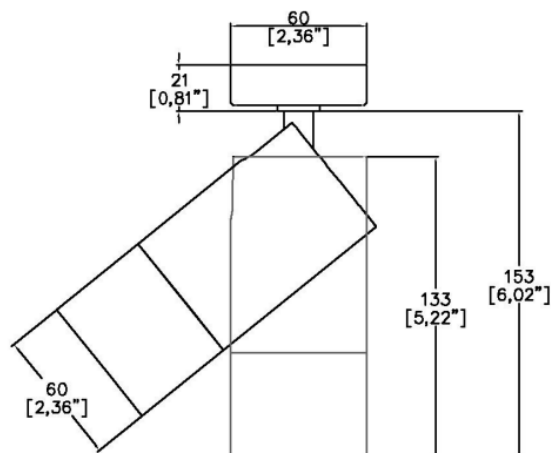

eldoLED

Datasheet
ECOdrive 240/A-BIS

LED driver mechanical details

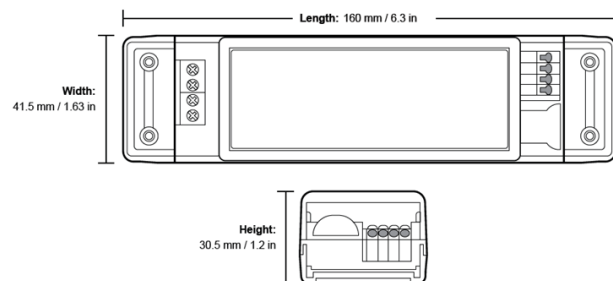

7100/2-LED-SMP
Cut out Ø15mm

Product Name:	ProspeX TubeLED Mini
Product Code:	7100/2-LED-22-12-D -BK-SMP
Finish:	Black
Cut-out:	Ø 15mm
Dimensions:	Ø 60mm – (H) 153mm
Accessories:	Honeycomb Louvre + spreader lens
Wiring:	One driver per fitting (Series)
Drive Current:	380mA 33V
Wattage:	13.6W LED
Output:	852lm (24-degree beam)
Lighting Controls:	Dali Dimmable
Colour Temperature:	2200K CRI 90
IP Rating:	IP54

Application:

Surface spotlight, 24 degree beam angle and full adjustability
Honeycomb louvre required to reduce glare. Supplied with spreader lenses to be tested on site during correct positioning of fitting within feature bar mesh.
Supplied with remote dali dim driver from supplier.

Manufacturer: Lucent
Contact: Giovanni Premi
Email: giovanni@lucent-lighting.com
Tel: +44 20 8442 0880 / 07816171717

IMPORTANT NOTE

*ALL DIMENSIONS, ESPECIALLY CUTOUT DIMENSIONS, MUST BE CONFIRMED PRIOR TO WORKS COMMENCING ON SITE.
*ANY IMAGES PROVIDED ARE INDICATIVE, AND MAY NOT REFLECT THE COLOUR OR FINISH OF THE ACTUAL FITTING PROPOSED, OR SHOW ITEMS SUCH AS ACCESSORIES, LAMPS OR TRANSFORMERS WHICH MAY BE INCLUDED IN OUR COSTINGS AND BE REQUIRED TO OPERATE THE FITTING.

MISTRY LIGHTING


T: +44 (0)774715 3333
E: Krishna@mistrylighting.com
www.mistrylighting.com



Surface Spotlight High Output

REF.

SP5

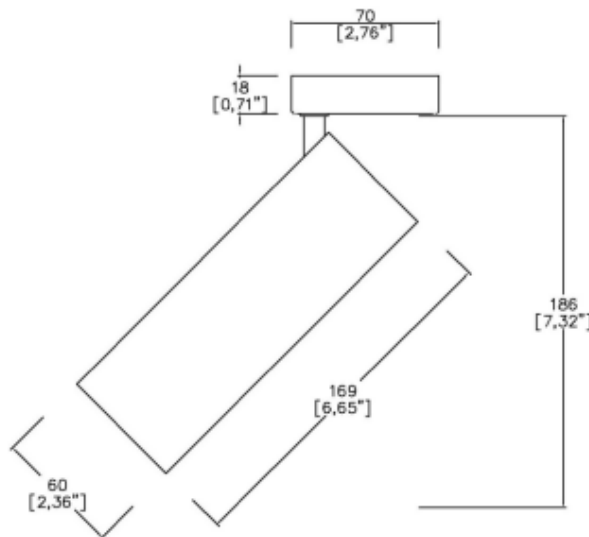

16960-LED-SMP
Cut out Ø15mm

Product Name:	Prosplex TubeLED Mini High Output
Product Code:	16960-LED-927-D-BK-SMP
Finish:	Black
Cut-out:	Ø 15mm
Dimensions:	Ø 60mm – (H) 186mm
Accessories:	N/A
Wiring:	One driver per fitting
Drive Current:	600mA 34.7V
Wattage:	24.4W LED
Output:	1900lm (55-degree beam)
Lighting Controls:	Dali Dimmable
Colour Temperature:	2700K CRI 90
IP Rating:	IP54

Application:

Surface spotlight, high output 55 degree beam angle. Integral dali driver.

Manufacturer: Lucent
Contact: Giovanni Premi
Email: giovanni@lucent-lighting.com
Tel: +44 20 8442 0880 / 07816171717


IMPORTANT NOTE

*ALL DIMENSIONS, ESPECIALLY CUTOUT DIMENSIONS, MUST BE CONFIRMED PRIOR TO WORKS COMMENCING ON SITE.
*ANY IMAGES PROVIDED ARE INDICATIVE, AND MAY NOT REFLECT THE COLOUR OR FINISH OF THE ACTUAL FITTING PROPOSED, OR SHOW ITEMS SUCH AS ACCESSORIES, LAMPS OR TRANSFORMERS WHICH MAY BE INCLUDED IN OUR COSTINGS AND BE REQUIRED TO OPERATE THE FITTING.





T: +44 (0)774715 3333
E: Krishna@mistrylighting.com
www.mistrylighting.com

MISTRY LIGHTING

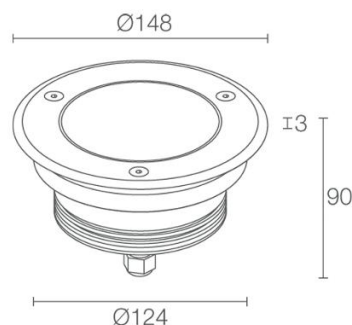

CONNECTIONS IN DALI MODE

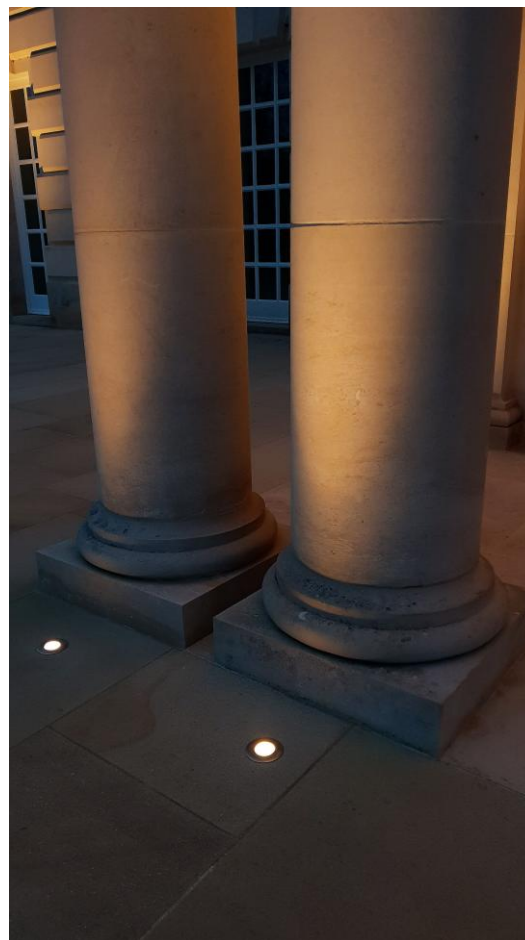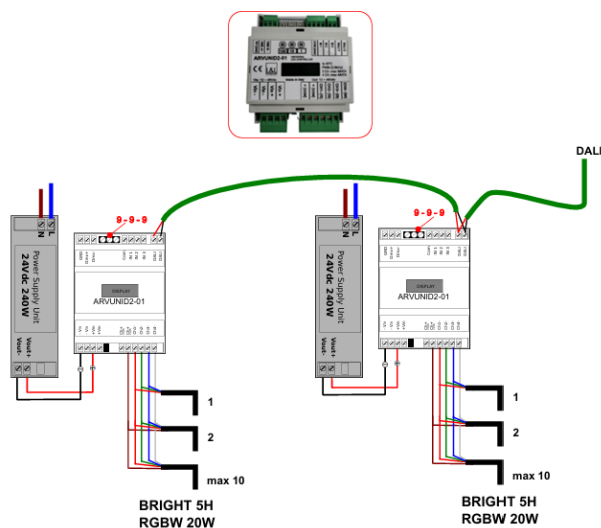

Product Name:	Bright 5.H
Product Code:	CB5H00000070SI-1
Finish:	Bronze finish
Cut-out:	Ø 124mm
Dimensions:	Ø 148mm – (H) 90mm
Accessories:	Outer case
Wiring:	Remote Driver
Drive Current:	24V dc
Wattage:	20W LED
Output:	656lm (Medium Beam 20°)
Lighting Controls:	Dali Dimmable
Colour Temperature:	RGBW
IP Rating:	IP67

Application:

Inground uplights to illuminate columns. Driver to be housed in a remote location.

Manufacturer to advise on suitable driver.

Please refer to manufacturers installation details for wiring. Driver to be located in an accessible and well ventilated space.

Manufacturer: Luce and Light

Contact: Riccardo De Luca

Email: keyaccount10@lucelight.it

IMPORTANT NOTE

*ALL DIMENSIONS, ESPECIALLY CUTOUT DIMENSIONS, MUST BE CONFIRMED PRIOR TO WORKS COMMENCING ON SITE.

*ANY IMAGES PROVIDED ARE INDICATIVE, AND MAY NOT REFLECT THE COLOUR OR FINISH OF THE ACTUAL FITTING PROPOSED, OR SHOW ITEMS SUCH AS ACCESSORIES, LAMPS OR TRANSFORMERS WHICH MAY BE INCLUDED IN OUR COSTINGS AND BE REQUIRED TO OPERATE THE FITTING.




MISTRY LIGHTING

T: +44 (0)774715 3333
E: Krishna@mistrylighting.com
www.mistrylighting.com



/484S First Fix Sleeve

The fitting is supplied as standard with a fixing sleeve; this is bonded into mounting surface first. The LD151 is secured into the sleeve by 2 'O' ring; the body. When pushed into the sleeve it creates a watertight seal.

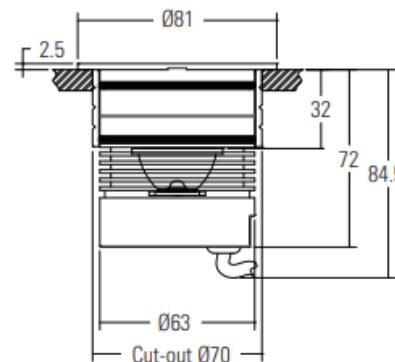


TXDEL500DALI

500mA Constant Current Driver

Measurements for mounting holes.

Allow an air gap between drivers and install in a well ventilated space.

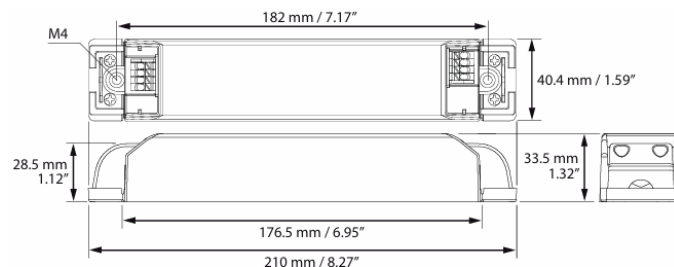

Driver can be mounted max 30M away using a 1mm cable.

Product Name:	LD151
Product Code:	LD151-E3-500-LW27/NB/GS/RAL/484S
Finish:	Flamed Bronze
Cut-out:	Ø 70mm
Dimensions:	Ø 81mm – (H) 84.5mm
Accessories:	First fix sleeve and anti glare shield
Wiring:	Remote Dali Driver
Drive Current:	500mA 14V
Wattage:	7W LED
Output:	477lm (Narrow Beam 12°)
Lighting Controls:	Dali Dimmable
Colour Temperature:	2700K CRI 85+
P Rating:	IP67/IK08

Application:

Inground uplights to illuminate architectural features. Anti glare shield required to reduce glare.

First fix sleeve to be ordered for installation and remote Dali driver required.

Manufacturer to advise on suitable driver.

Please refer to manufacturers installation details for wiring. Driver to be located in an accessible and well ventilated space.

Manufacturer: Light Graphix

Contact: Dylan Parry

Email: dylan@lightgraphix.biz

Tel: +44 (0)1322 527629 | 07340 399180

IMPORTANT NOTE

*ALL DIMENSIONS, ESPECIALLY CUTOUT DIMENSIONS, MUST BE CONFIRMED PRIOR TO WORKS COMMENCING ON SITE.

*ANY IMAGES PROVIDED ARE INDICATIVE, AND MAY NOT REFLECT THE COLOUR OR FINISH OF THE ACTUAL FITTING PROPOSED, OR SHOW ITEMS SUCH AS ACCESSORIES, LAMPS OR TRANSFORMERS WHICH MAY BE INCLUDED IN OUR COSTINGS AND BE REQUIRED TO OPERATE THE FITTING.

MISTRY LIGHTING

T: +44 (0)774715 3333
E: Krishna@mistrylighting.com
www.mistrylighting.com



TBC BY STUDIO TWO INTERIORS

Product Name: N/A
Product Code: N/A
Finish: N/A
Cut-out: N/A
Dimensions: N/A
Accessories: N/A
Wiring: Mains Dimmable
Drive Current: N/A
Wattage: N/A
Output: N/A
Lighting Controls: LED
Colour Temperature: 2400K
IP Rating: N/A

Application:
Decorative Pendant

IMPORTANT NOTE

*ALL DIMENSIONS, ESPECIALLY CUTOUT DIMENSIONS, MUST BE CONFIRMED PRIOR TO WORKS COMMENCING ON SITE.
*ANY IMAGES PROVIDED ARE INDICATIVE, AND MAY NOT REFLECT THE COLOUR OR FINISH OF THE ACTUAL FITTING PROPOSED, OR SHOW ITEMS SUCH AS ACCESSORIES, LAMPS OR TRANSFORMERS WHICH MAY BE INCLUDED IN OUR COSTINGS AND BE REQUIRED TO OPERATE THE FITTING.



T: +44 (0)774715 3333
E: Krishna@mistrylighting.com
www.mistrylighting.com

MISTRY LIGHTING

TBC BY STUDIO TWO INTERIORS

Product Name: N/A
Product Code: N/A
Finish: N/A
Cut-out: N/A
Dimensions: N/A
Accessories: N/A
Wiring: Mains Dimmable
Drive Current: N/A
Wattage: N/A
Output: N/A
Lighting Controls: LED
Colour Temperature: 2400K
IP Rating: N/A

Application:
Decorative Floor Lamp

IMPORTANT NOTE

*ALL DIMENSIONS, ESPECIALLY CUTOUT DIMENSIONS, MUST BE CONFIRMED PRIOR TO WORKS COMMENCING ON SITE.
*ANY IMAGES PROVIDED ARE INDICATIVE, AND MAY NOT REFLECT THE COLOUR OR FINISH OF THE ACTUAL FITTING PROPOSED, OR SHOW ITEMS SUCH AS ACCESSORIES, LAMPS OR TRANSFORMERS WHICH MAY BE INCLUDED IN OUR COSTINGS AND BE REQUIRED TO OPERATE THE FITTING.



T: +44 (0)774715 3333
E: Krishna@mistrylighting.com
www.mistrylighting.com

MISTRY LIGHTING

TBC BY STUDIO TWO INTERIORS

Product Name: N/A
Product Code: N/A
Finish: N/A
Cut-out: N/A
Dimensions: N/A
Accessories: N/A
Wiring: Mains Dimmable
Drive Current: N/A
Wattage: N/A
Output: N/A
Lighting Controls: LED
Colour Temperature: 2400K
IP Rating: N/A

Application:
Decorative Table Lamp

IMPORTANT NOTE

*ALL DIMENSIONS, ESPECIALLY CUTOUT DIMENSIONS, MUST BE CONFIRMED PRIOR TO WORKS COMMENCING ON SITE.
*ANY IMAGES PROVIDED ARE INDICATIVE, AND MAY NOT REFLECT THE COLOUR OR FINISH OF THE ACTUAL FITTING PROPOSED, OR SHOW ITEMS SUCH AS ACCESSORIES, LAMPS OR TRANSFORMERS WHICH MAY BE INCLUDED IN OUR COSTINGS AND BE REQUIRED TO OPERATE THE FITTING.



T: +44 (0)774715 3333
E: Krishna@mistrylighting.com
www.mistrylighting.com

MISTRY LIGHTING

TBC BY STUDIO TWO INTERIORS

Product Name: N/A
Product Code: N/A
Finish: N/A
Cut-out: N/A
Dimensions: N/A
Accessories: N/A
Wiring: Mains Dimmable
Drive Current: N/A
Wattage: N/A
Output: N/A
Lighting Controls: LED
Colour Temperature: 2400K
IP Rating: N/A

Application:
Decorative Wall Light

IMPORTANT NOTE

*ALL DIMENSIONS, ESPECIALLY CUTOUT DIMENSIONS, MUST BE CONFIRMED PRIOR TO WORKS COMMENCING ON SITE.
*ANY IMAGES PROVIDED ARE INDICATIVE, AND MAY NOT REFLECT THE COLOUR OR FINISH OF THE ACTUAL FITTING PROPOSED, OR SHOW ITEMS SUCH AS ACCESSORIES, LAMPS OR TRANSFORMERS WHICH MAY BE INCLUDED IN OUR COSTINGS AND BE REQUIRED TO OPERATE THE FITTING.



T: +44 (0)774715 3333
E: Krishna@mistrylighting.com
www.mistrylighting.com

MISTRY LIGHTING

TBC BY STUDIO TWO INTERIORS

Product Name: N/A

Product Code: N/A

Finish: N/A

Cut-out: N/A

Dimensions: N/A

Accessories: N/A

Wiring: Mains Dimmable

Drive Current: N/A

Wattage: N/A

Output: N/A

Lighting Controls: LED

Colour Temperature: 2400K

IP Rating: N/A

Application:

Decorative Picture Light

IMPORTANT NOTE

*ALL DIMENSIONS, ESPECIALLY CUTOUT DIMENSIONS, MUST BE CONFIRMED PRIOR TO WORKS COMMENCING ON SITE.
*ANY IMAGES PROVIDED ARE INDICATIVE, AND MAY NOT REFLECT THE COLOUR OR FINISH OF THE ACTUAL FITTING PROPOSED, OR SHOW ITEMS SUCH AS ACCESSORIES, LAMPS OR TRANSFORMERS WHICH MAY BE INCLUDED IN OUR COSTINGS AND BE REQUIRED TO OPERATE THE FITTING.



T: +44 (0)774715 3333
E: Krishna@mistrylighting.com
www.mistrylighting.com

MISTRY LIGHTING

TBC BY STUDIO TWO INTERIORS

Product Name: N/A
Product Code: N/A
Finish: N/A
Cut-out: N/A
Dimensions: N/A
Accessories: N/A
Wiring: Mains Dimmable
Drive Current: N/A
Wattage: N/A
Output: N/A
Lighting Controls: LED
Colour Temperature: 2400K
IP Rating: N/A

Application:
Decorative Wall Light

IMPORTANT NOTE

*ALL DIMENSIONS, ESPECIALLY CUTOUT DIMENSIONS, MUST BE CONFIRMED PRIOR TO WORKS COMMENCING ON SITE.
*ANY IMAGES PROVIDED ARE INDICATIVE, AND MAY NOT REFLECT THE COLOUR OR FINISH OF THE ACTUAL FITTING PROPOSED, OR SHOW ITEMS SUCH AS ACCESSORIES, LAMPS OR TRANSFORMERS WHICH MAY BE INCLUDED IN OUR COSTINGS AND BE REQUIRED TO OPERATE THE FITTING.



T: +44 (0)774715 3333
E: Krishna@mistrylighting.com
www.mistrylighting.com

MISTRY LIGHTING

WWW.MISTRYLIGHTING.COM



MISTRY LIGHTING

