


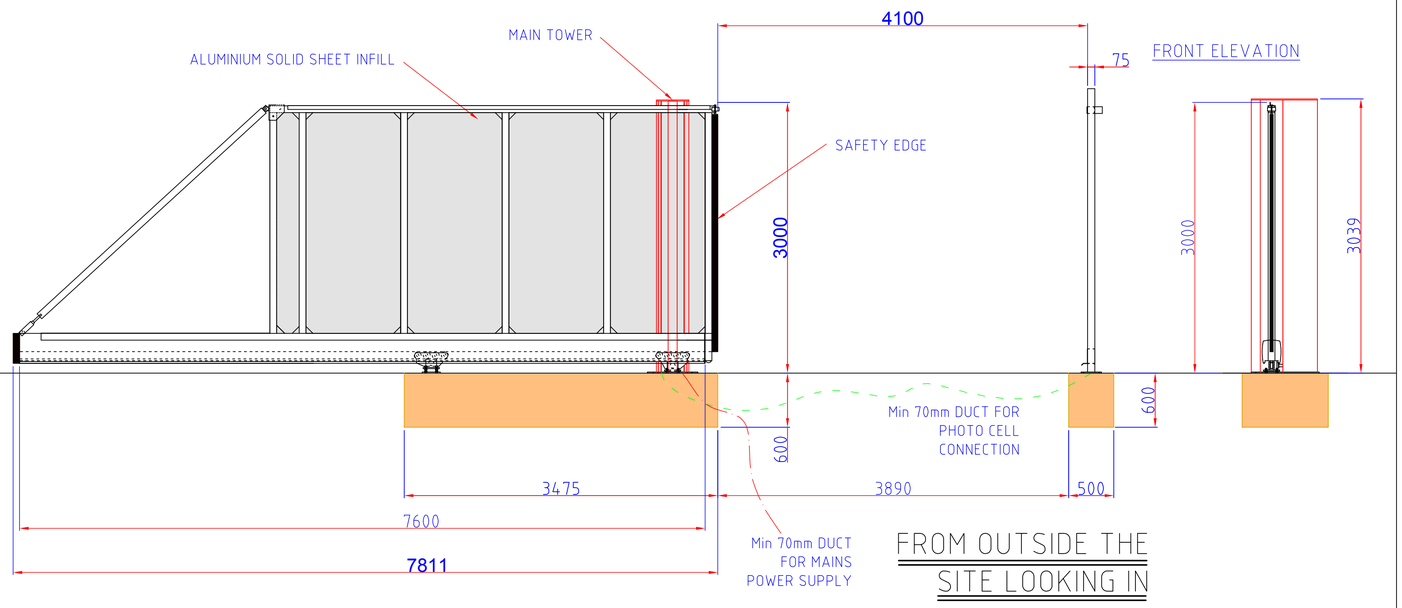


FROM OUTSIDE THE SITE LOOKING IN

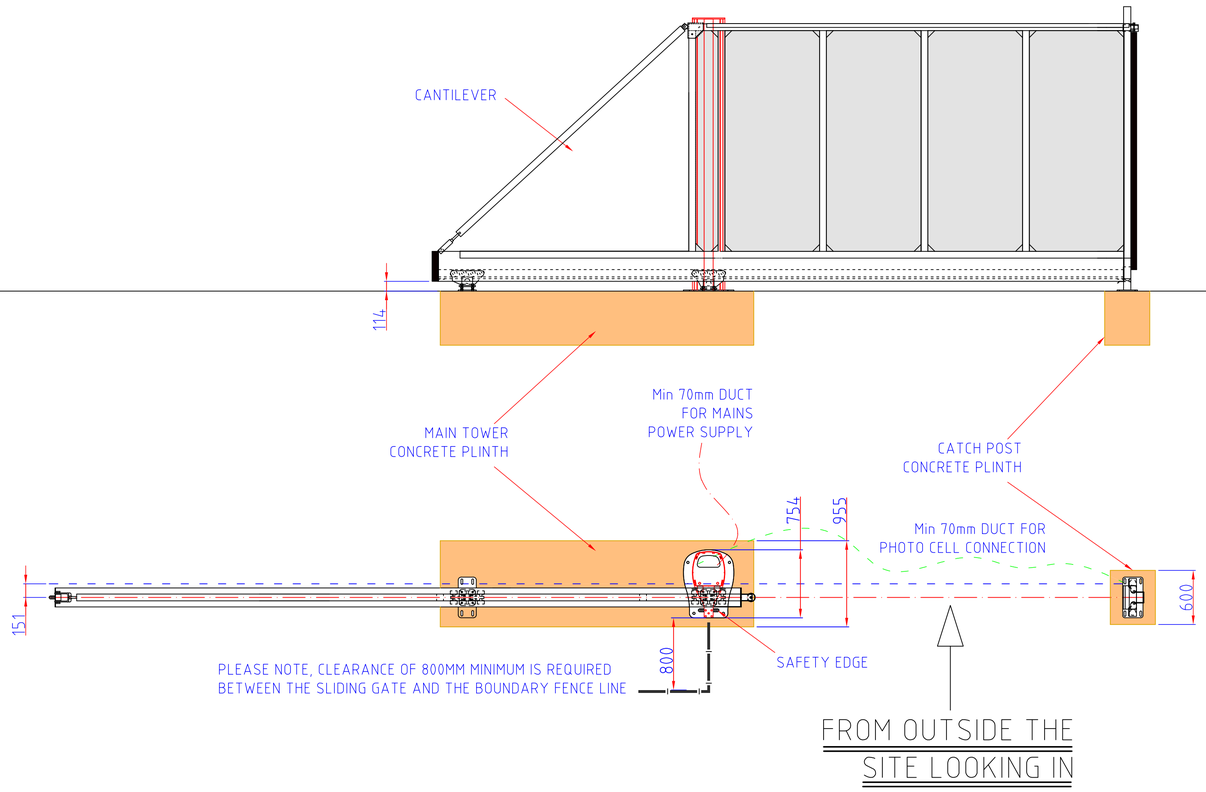

FROM OUTSIDE THE SITE LOOKING IN

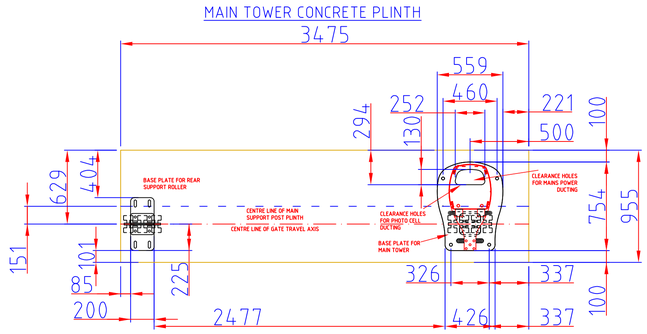

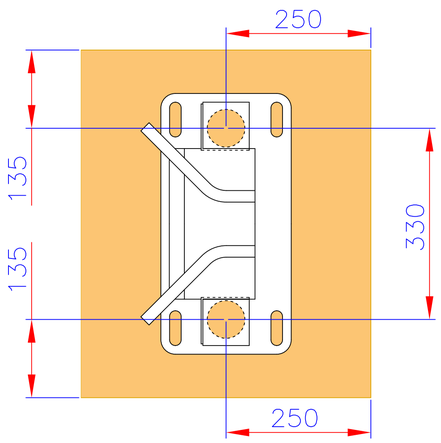

GENERAL NOTES

1. FOUNDATIONS MUST BE LEVEL/IN–LINE.
2. GATE MUST RUN LEVEL.
3. THERE MUST BE A MINIMUM CLEARANCE OF 114mm FROM THE ROAD TO THE BOTTOM OF THE BEAM.
4. DUCT MUST BE RUN TO RECEIVER FROM PHOTOCELL.
5. IF IN DOUBT, PLEASE ASK!

DIMENSIONS & SPECIFICATIONS

FOUNDATIONS:
RECOMMENDED CONCRETE:
C40 MIX.
CATCHPOST:
L = 500mm.
H = 600mm.
W = 600mm.
MAIN TOWER:
L = DEPENDS ON BEAM LENGTH
H = 600mm.
W = 955mm.
REAR SUPPORT ROLLER:
L = 350mm.
H = 400mm (BOLT DOWN).
H = 700mm (CAST IN).
W = 475mm.

POWER REQUIREMENTS

240v SINGLE PHASE,
50Hz 10 Amps
PER GATE, MCB NOT RCD.


BOLT INFORMATION

INCLUDED–

MAIN TOWER:
4 x M20 x 160MM
THRU BOLTS


REAR ROLLER:
4 x M16 x 160MM
THRU BOLTS

CATCH POST:
4 x M16 x 160MM
THRU BOLTS



OPTIONS

SPIKES OPTION AVAILABLE



DRAWING DETAILS

4.1M OPENING X 2.4M HEIGHT LH
ALUMINIUM SOLID SHEET INFILL

CLD Fencing Systems
Unit 11, Springvale Business Centre
Millbuck Way, Sandbach
Cheshire, CW11 3HY

ORIGINAL GATE DESIGN COVERED BY COPYRIGHT ©2012 ONWARDS