




- 01 NON-ORIGINAL STAIRCASE, BALUSTRADE/
RAILING TO BE REMOVED. ALL FIXING HOLES
INTO ORIGINAL FABRIC AND STRUCTURE TO
BE MADE GOOD
- 02 NON-ORIGINAL INTERIOR PARTITIONS TO
BE REMOVED
- 03 NON-ORIGINAL INFILL BOARDING TO BE
REMOVED
- 04 NEW TIMBER JOIST FLOOR STRUCTURE
TO INFILL STAIR OPENING. NEW FLOOR
AND CEILING FINISHES TO BE PROVIDED.
- 05 NEW LADDER ACCESS HATCH TO BE
PROVIDED WITHIN NON-ORIGINAL
OPENING
- 06 NEW LADDER ACCESS HATCH TO BE
PROVIDED WITHIN NEW OPENING. HATCH
POSITION INDICATIVE ONLY - TO BE
COORDINATED WITH EXISTING FLOOR
STRUCTURE WHERE POSSIBLE
- 07 NEW GLAZED BALUSTRADE
- 08 NEW TIMBER BALUSTRADE
- 09 NEW DRYLINING PARTITION

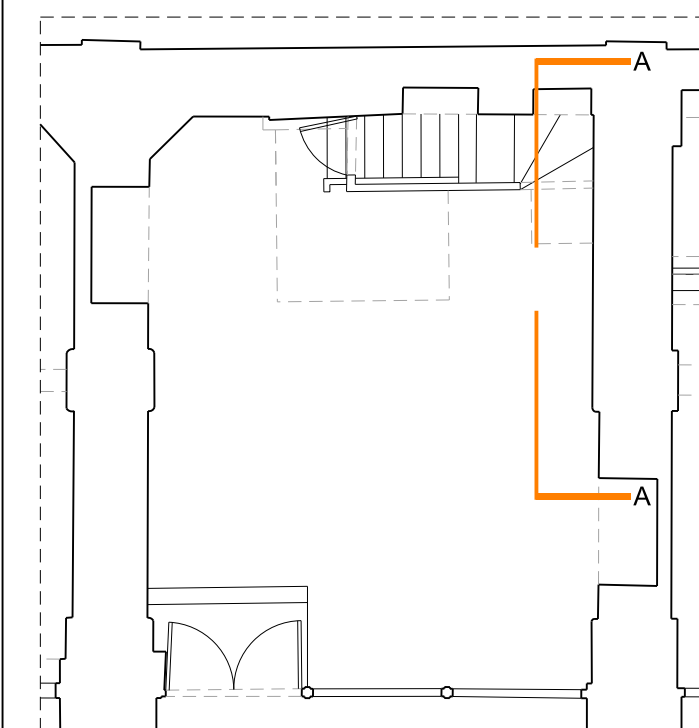

This drawing should not be used for setting out for construction.