
ALL FRAMES AS VIEWED FROM OUTSIDE BUILDING




3 No.Total

Type LE

LE.L10.01
LE-L10.02
LE-L10.03

Dantzic St. Elevation




3 No.Total

Type M

W10.01
W10.02
W10.03

Hanover St. Elevation




2 No.Total

Type M.1

W10.05
W10.06

Federation St. Elevation




1 No.Total

Type N

W10.04


Hanover St. Elevation

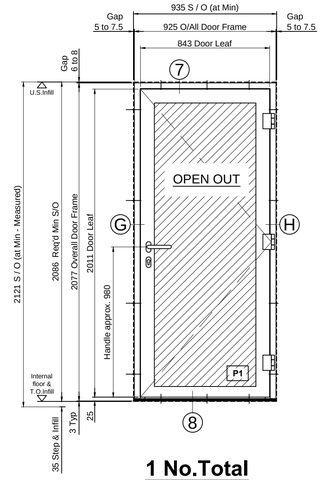

1 No.Total

Type DE
DE-L10-02

Manual Access Door
to Lift over run
Federation St. Elevation

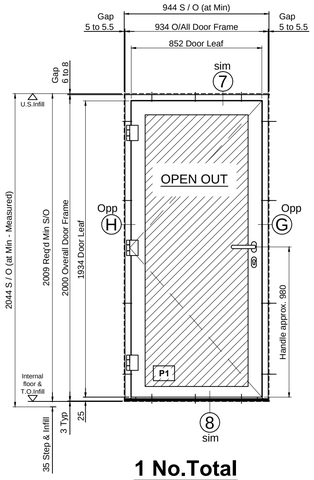



1 No.Total


Type DE
DE-L10-01


Manual Access Door
to Lift over run
Dantzic St. Elevation

KEY:
S / O = Structure Opening
Sim = Similar detail
Opp = Opposite hand detail shown
H.C.P = Horizontal Centre Pivot

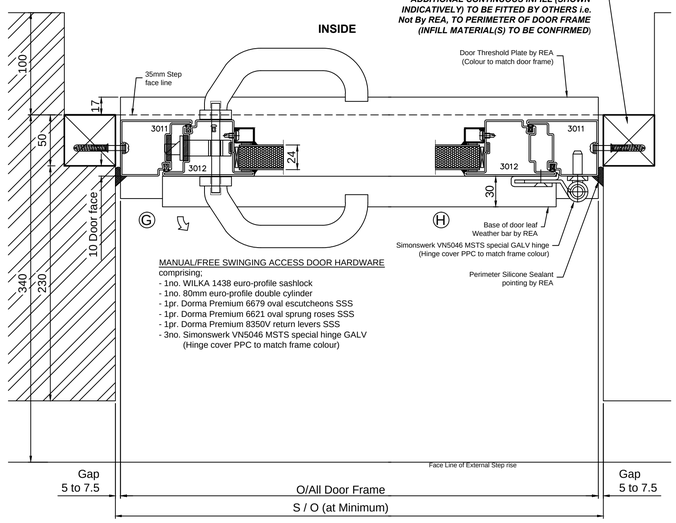


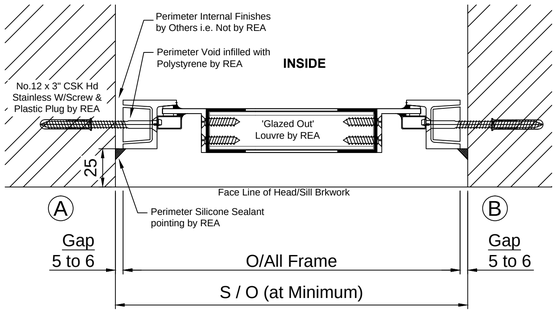


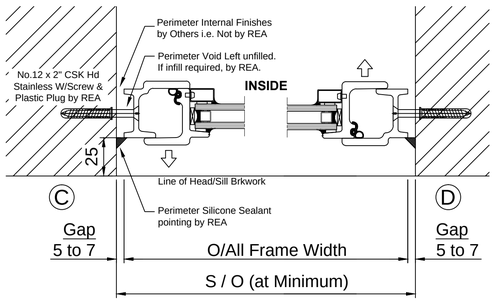


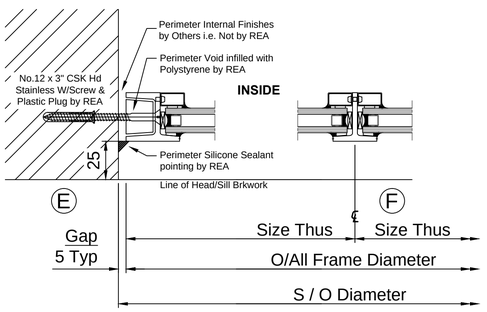


IF IN DOUBT - ASK

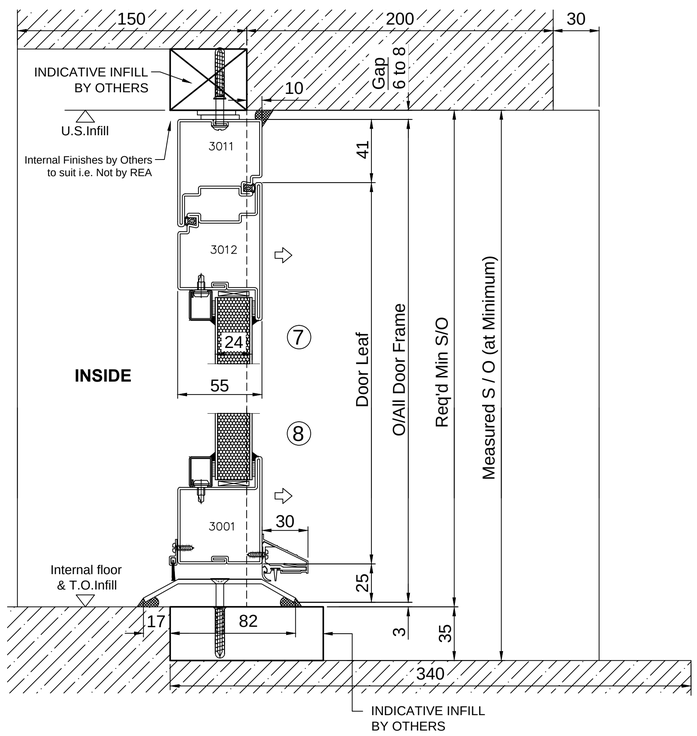

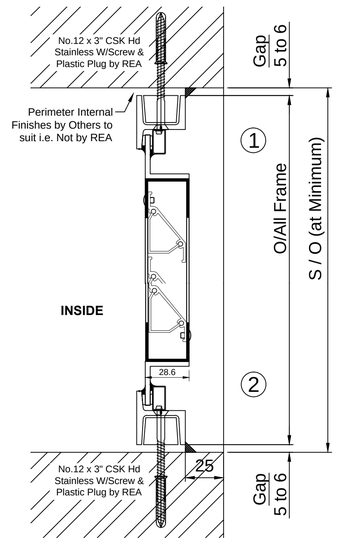


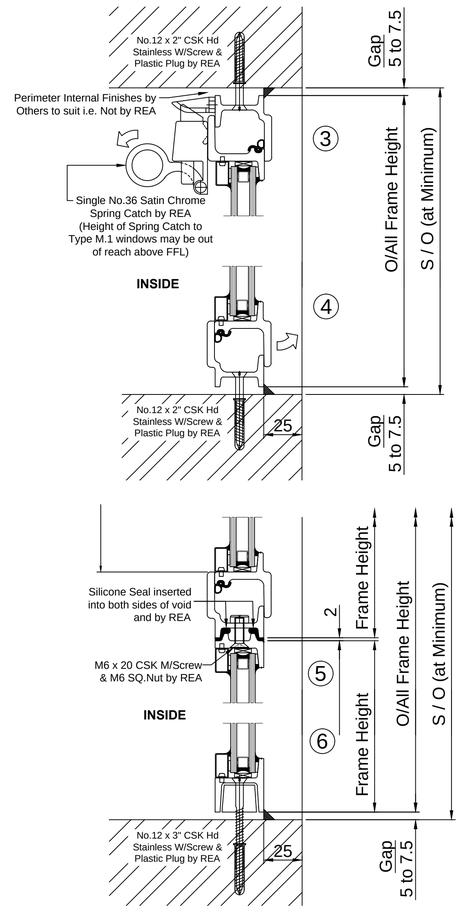




Glazing Spec 'B1'


16mm Double Glazing Unit comprising:-
Outside Pane - 4mm Clear Float
Cavity - 8mm Krypton gas filled c/w Alum SILVER spacer.
Inside Pane - 4mm Clear Float (without Low E)




Glazing Spec - 'P1'

24mm INFILL PANEL comprising:-
2mm Aluminium (PPC Colour to Match frame)
20mm Rigid Insulation Core
2mm Aluminium (PPC Colour to Match frame)







Location Plan

All installation teams are to ensure that the holes in the corner of the outer frame of all opening vents are sealed during site assembly operations

SPECIAL NOTE TO BUILDER

CLEANING is part of our fixing and glazing practice but will be limited to the removal of surplus mastic or putty and rubbing over all significant surfaces with a dry cloth as work proceeds. We cannot accept responsibility for dirt accumulated by site conditions or weather.
HOLES pierced for manufacture are not all intended to receive fixing screws but will be sealed with mastic during installation.
FIXING SCREWS and nuts are all rustproof. We DO NOT paint them.
STOVED POLYESTER FACTORY FINISHES are tough but can be damaged by sharp edges and scrapes from other building components. TAKE CARE when unloading, handling, storing and finishing surrounds.
Small areas of damage can be made good with air drying touch up paint to give a close (but not exact) match.
Galvanised coatings on rolled steel are not smooth. Allow for unevenness of the substrate when assessing surface appearance.
To maintain the finish, wash at three to six monthly intervals with water, mild detergent and soft cloth or sponge. Rinse on completion.
SITE PAINTING of galvanised steel needs calcium plumbate or degreasing, etching primer and zinc phosphate. Do not paint fittings or weatherseals.

FINISH

Hot Dip Galvanised & Stoved RAL 9001 SEMI-GLOSS (Cream)

FIXING

By REA METAL WINDOWS

GLAZING

By REA METAL WINDOWS

Glazing bead if supplied must be bedded against the glass and rebate in accordance with BS 6262 See our glazing instructions sheet

Rev	Date	AMENDMENT
A	03.10.17	Updated to Manufacture Issue; Louvre now 'Glazed Out', Louvre references added and Louvre Spec box amended (as Rev Clouds); Door Type, References & description added.
B	05.10.17	Types M and M.1 amended to match existing fenestration, and Detail 9 added

PROJECT

DANTZIC BUILDING

Dantzic Street, Manchester. M4 4DE

Drawing Title

Elevation & Section Details on Windows & Doors
Roof Level 10: Plant Rooms

For Manufacture

Copyright © The content of this drawing should not be reproduced in whole or part without prior consent in writing from this company

REA METAL WINDOWS LTD.
126/136 GREEN LANE
LIVERPOOL L13 7ED
TEL: 0151 228 6373
FAX: 0151 254 1828

SCALE	Not to Scale
DRAWN BY	Fadi Hanna
DATE	15-09-17
APPRO FOR MANUF R	
ESTIMATE REF	2016 / 065 Rev 3
ESTIMATE DATE	25-08-2017

DRAWING No.
3072 - 01
REVISION B