




Flush floor hatch BTP-50

Bar tread plate metal cover



hidex.co.uk

info@hidex.co.uk

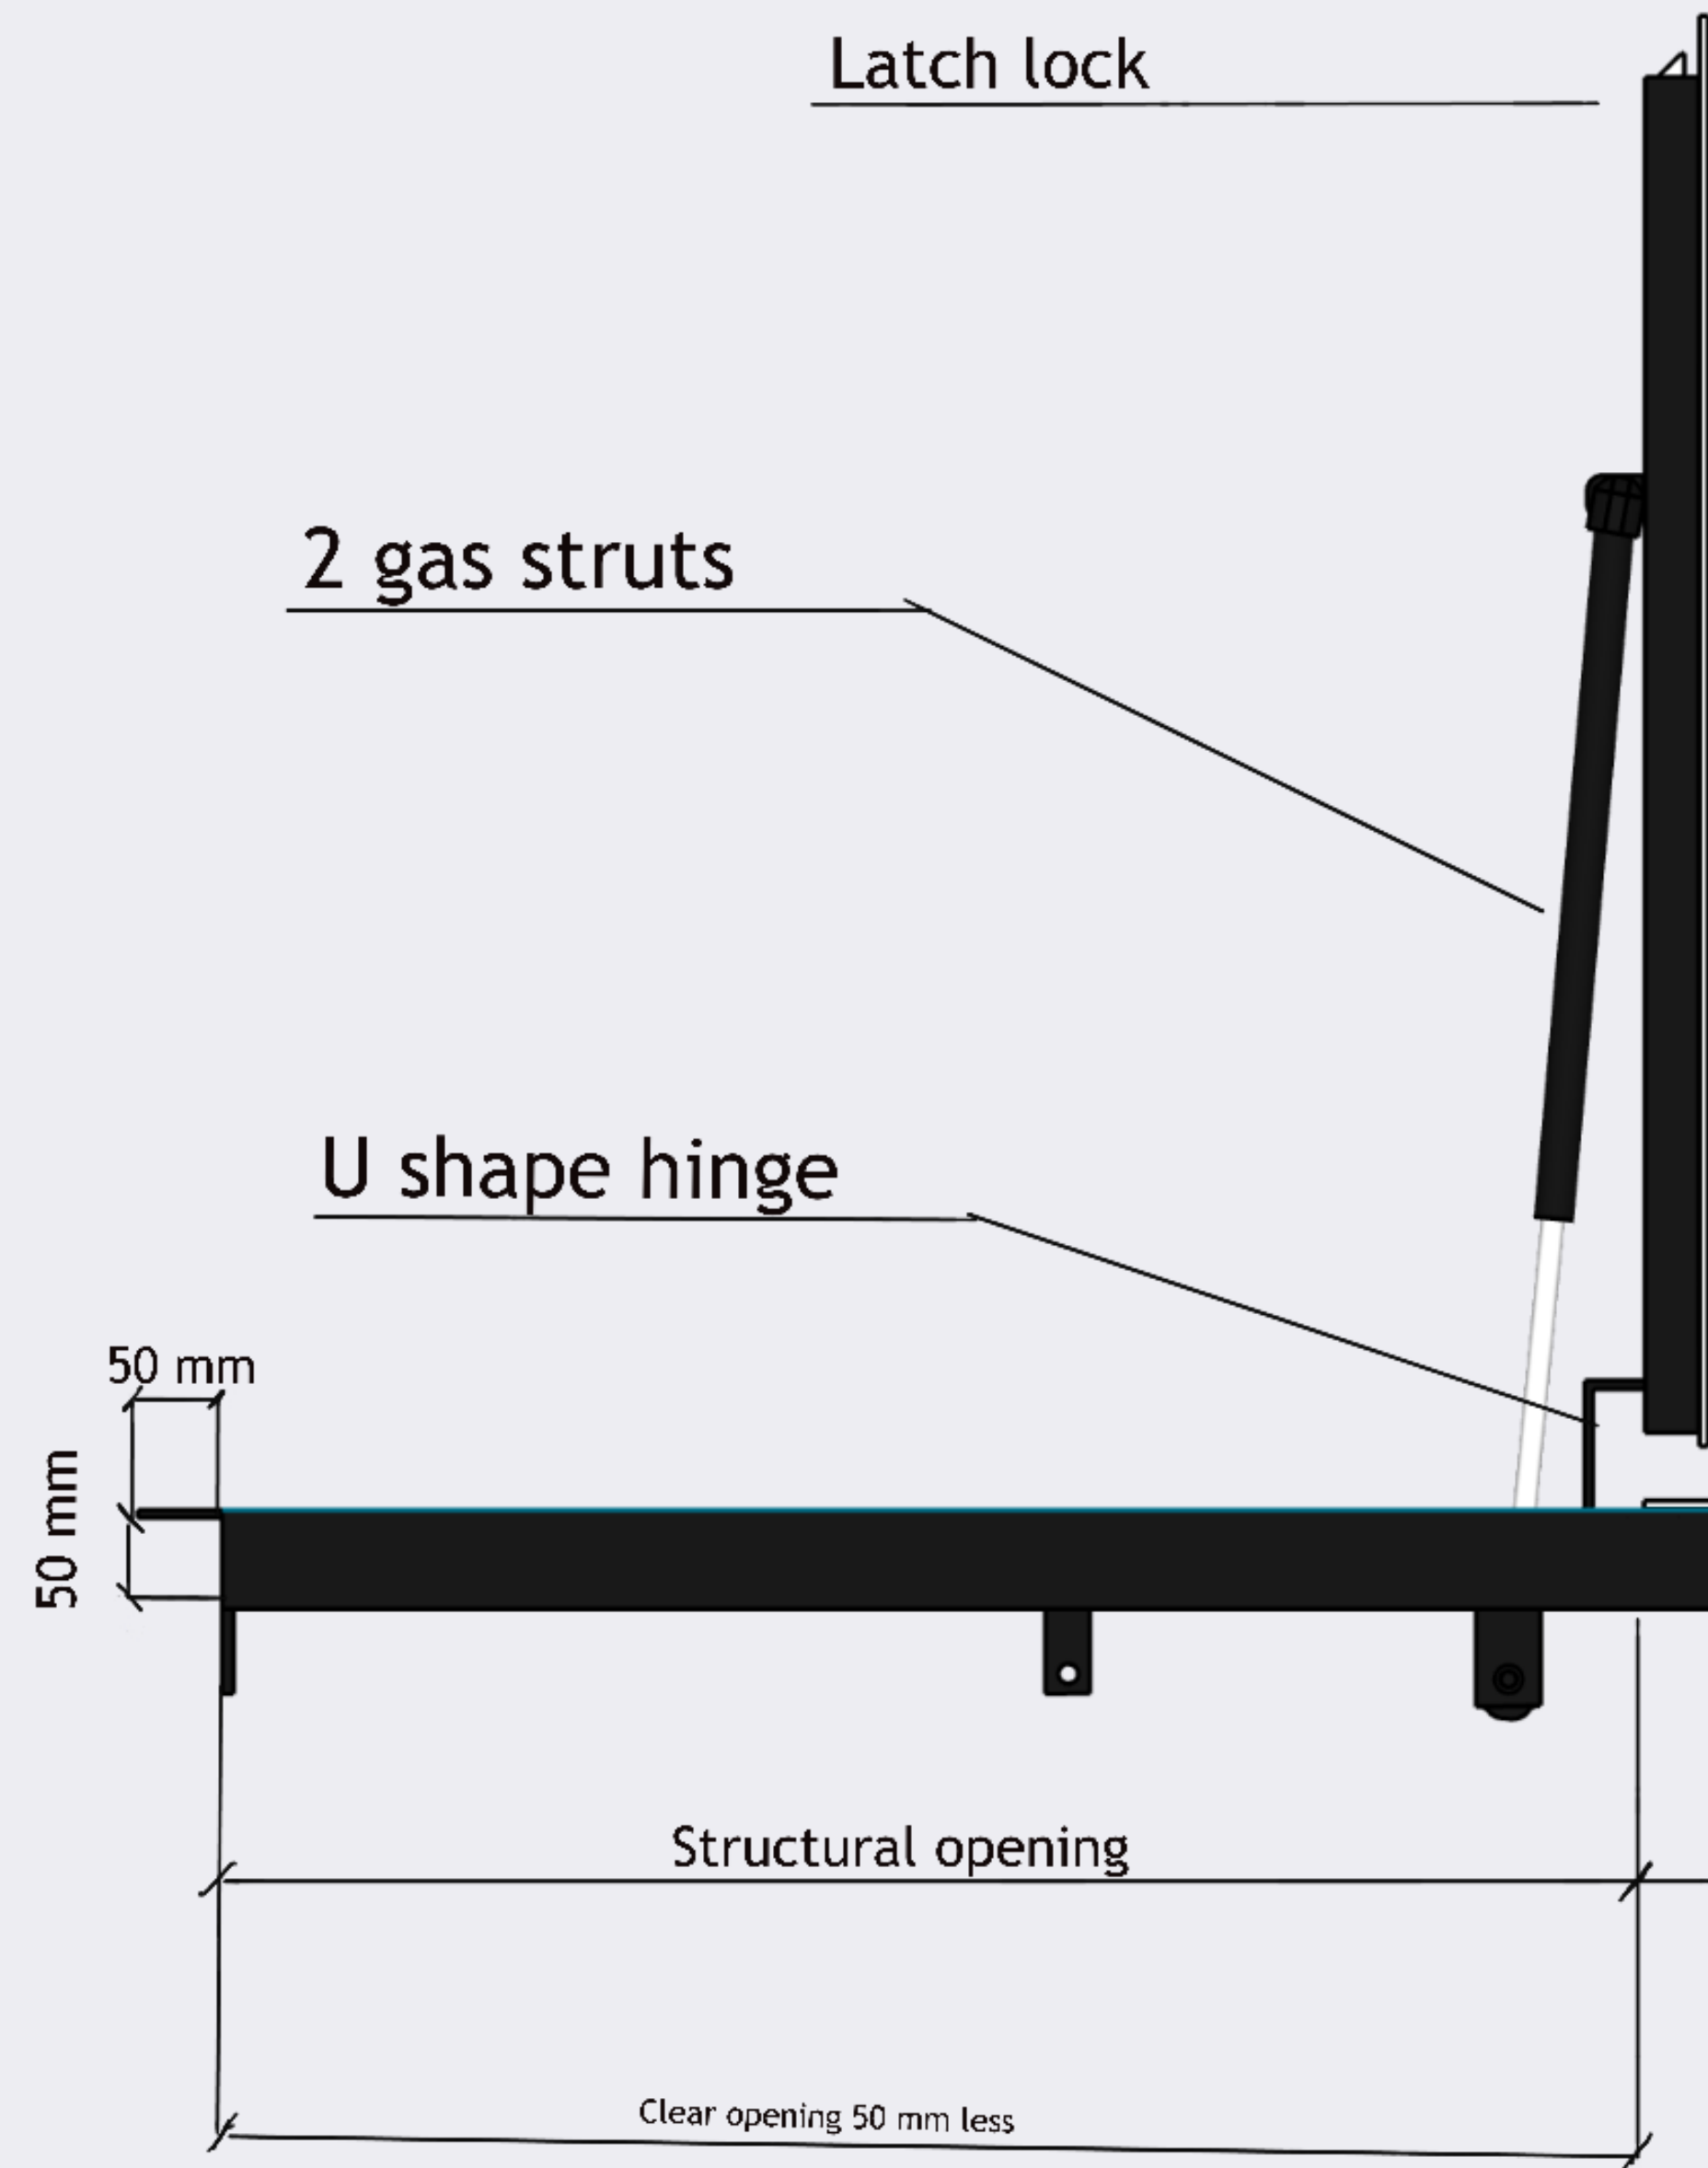

Standard sizes (mm)

600x500	700x500	800x800
600x600	700x700	800x900
600x700	700x800	800x1000
600x800	700x900	900x900
600x900	700x1000	900x1000
600x1000	800x500	1000x1000

Custom made to any size



Specification data

Main frame: 4mm thick 50x50 mm steel angle welded in accordance with EN10217-7 quality standards.

Door lid frame: rectangular steel box profile 30x20 mm 1.5 mm thick welded in accordance with EN10217-7 quality standards

Door lid: bar treaded steel plate 3 mm thick


Brackets: 4 mm thick steel brackets with 8 mm/d hole for anchor screws.

Hinges: U shape steel hinges made of 5 mm thick high quality steel welded in accordance with EN10217-7 quality standards

Operation: Gas spring assisted lift. The lid locks safely into the open position with help of gas struts preventing against accidental closure. To close the door some pressure has to be applied.

Finish: Black colour anti corrosion powder coating

Load Bearing: 600 kg. Pedestrian.

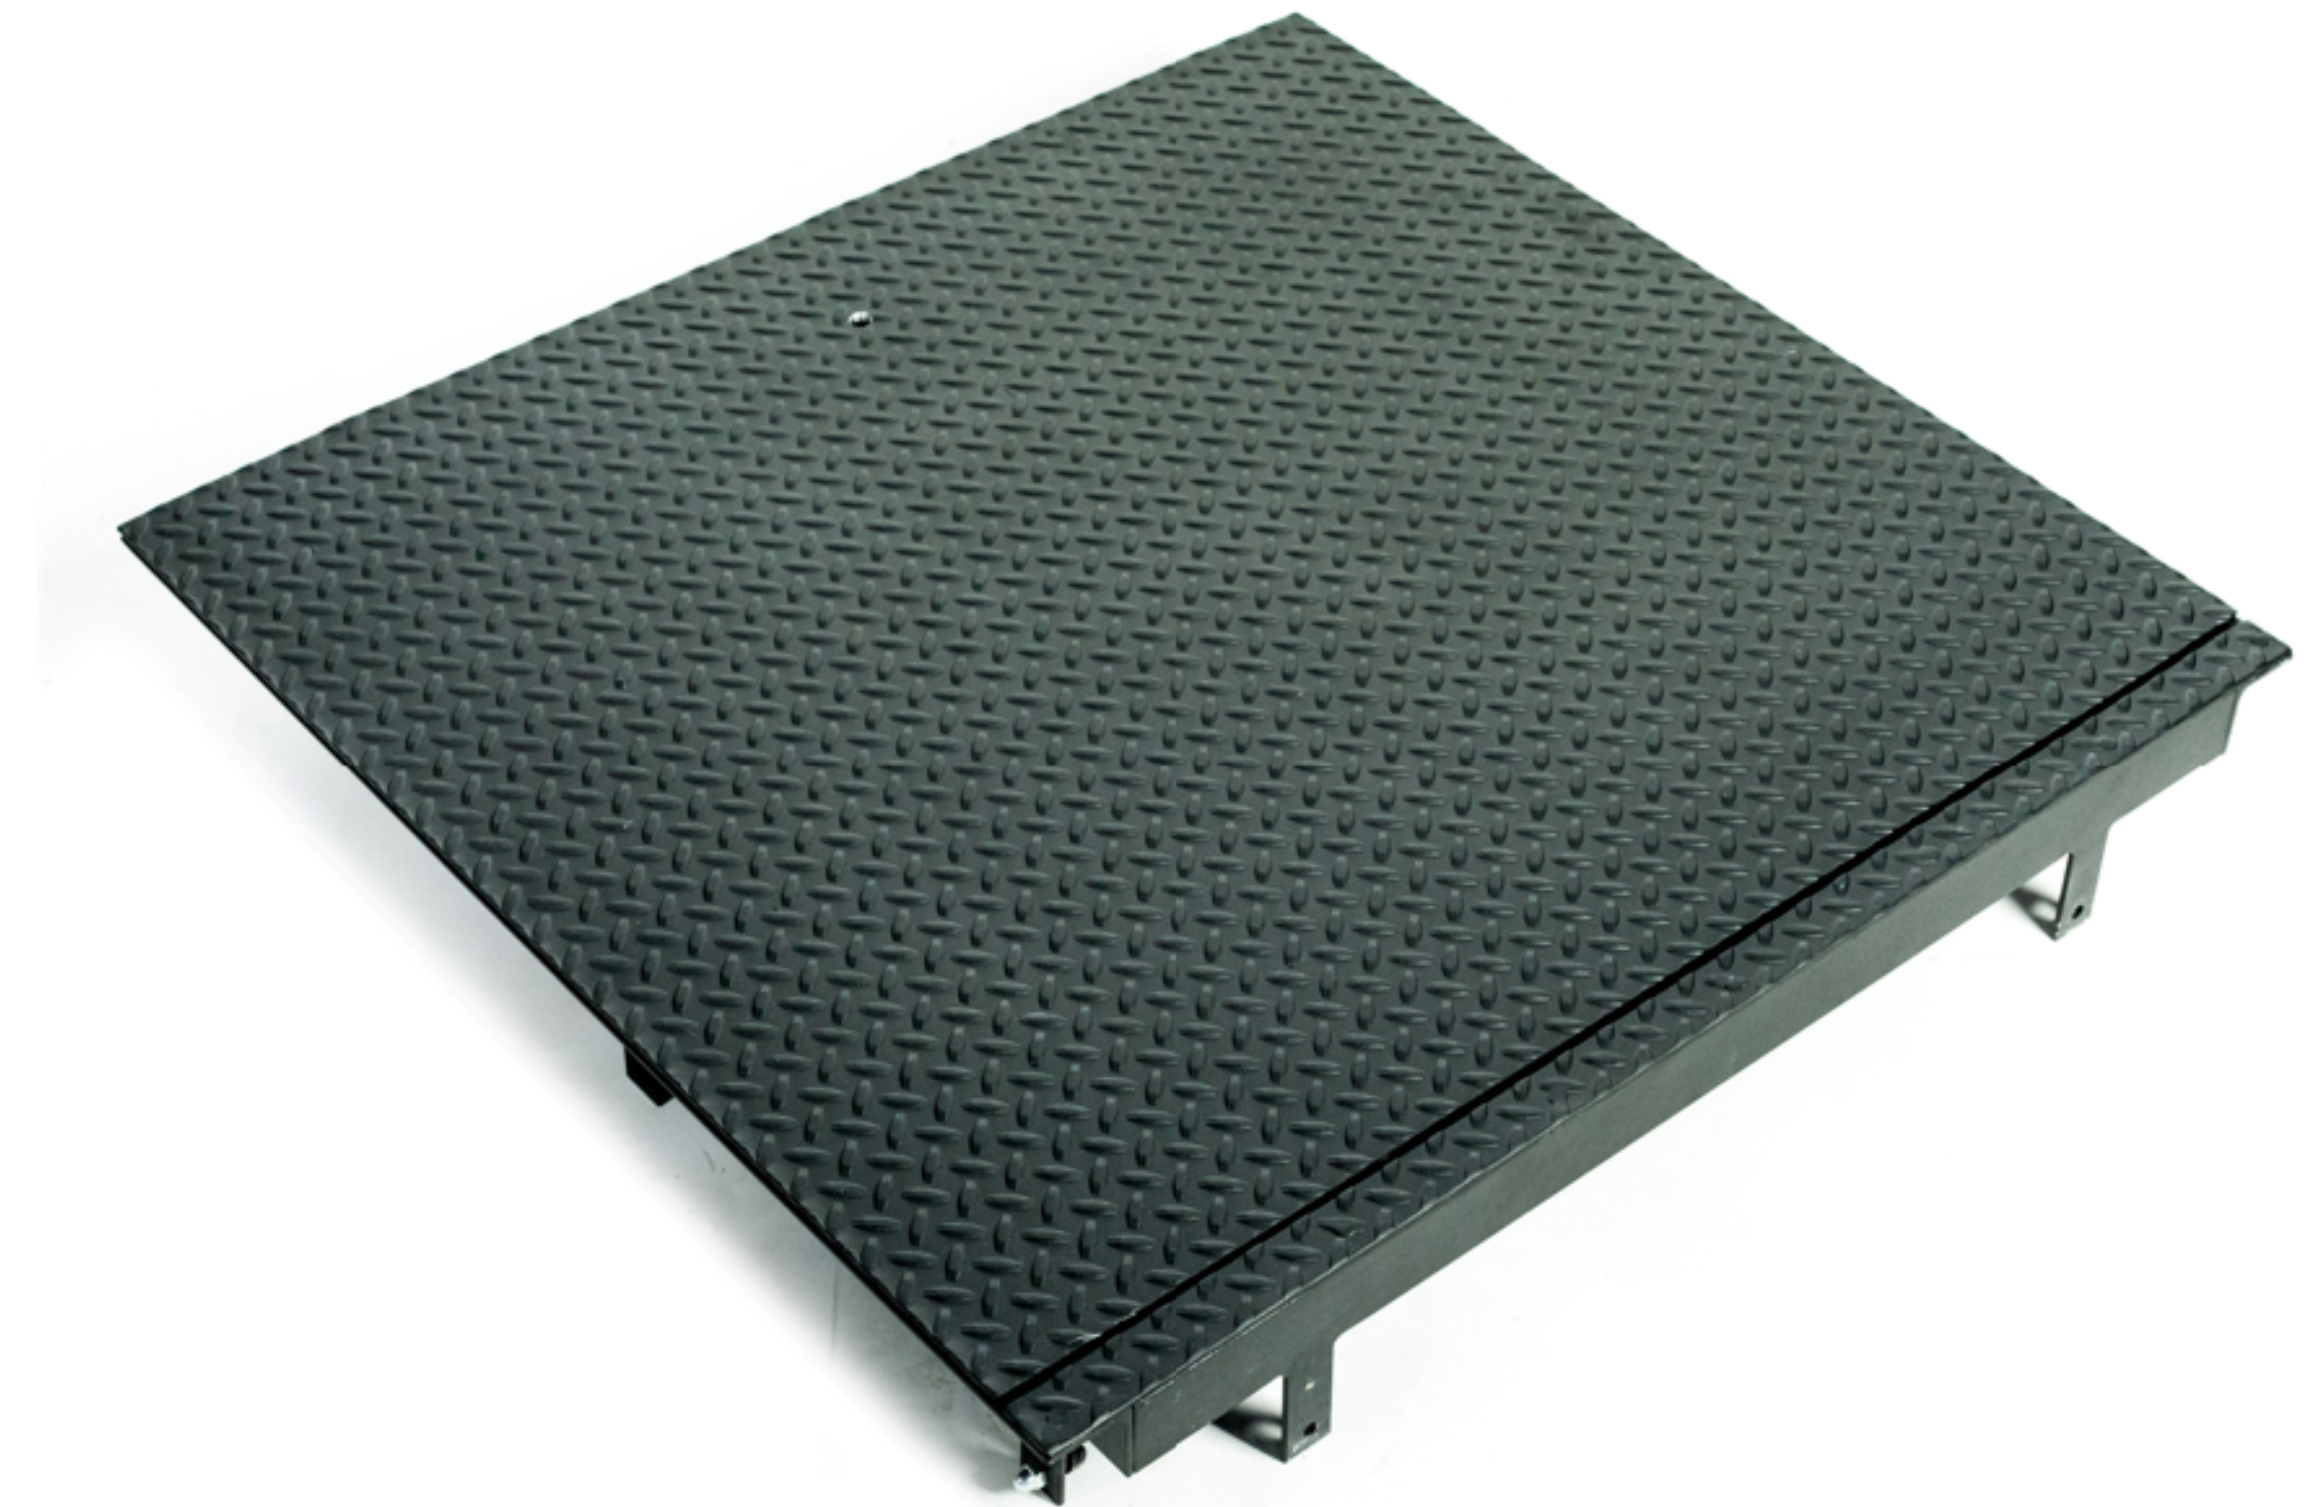

Format: single door leaf

Position: flush

Accessories: T bar square key,
stainless steel key hole threaded plug.

CAWS

P30/301 Access covers, manhole tops and
frames

L20/630 Hatches



Locking

Latch with T bar square key.
Can be opened from above
and from below.

