


Lighting Information

MIG



MIG

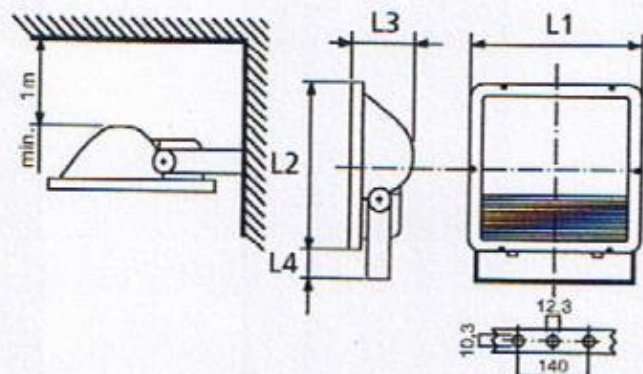

FEATURES

- Protective system **IP 65**  
- Solid and functional design
- Diecast aluminium housing and lid with cooling ribs
- Pure aluminium reflector
- With integrated ballast, ignitor and capacitor
- Wind exposed surface
ACT: 0,110 m²; MIG: 0,180 m²

APPLICATION

- Monuments/bridges
- Industrial areas
- Big building sites
- Small sports fields

LIGHT SOURCES

- For ACT: Metal-halide lamps double-ended RX7s and Fc2 (> see BLV catalogue)
- For MIG: Metal-halide lamps single-ended E40 (> see BLV catalogue)