Project name	Location	Type	Revision number	Date

Outdoor | Surface facade luminaires | JET

JET 36 (JE-30361)

JET 36 - JE-30361 - 1 & 1 COB - 28 W - 71° (DOWN) - 71° (UP) - 3000K CRI80 - DALI - BLACK

JE-30361-VW-VW-W30-DA-01

IP65 IK08

Luminaire Structure

- Die-cast aluminium housing
- Pre-treated before powder coating ensuring high corrosion resistance
- Single cable entry
- Two cable entries for through wiring
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- High-efficiency optical reflector
- Clear toughened glass
- Integral control gear
- Optional surface mounting box for easy wiring or conduit connection when wiring from behind is not possible
- JET luminaires with uplight and colder than 3000K CCT do not meet the IDA certification requirements

JET 36
JE-30361



Product description

102x102 mm - 218 mm - Down (Optic) & Up (Optic 2nd) - Square

Compatible with EN/ IEC 60598-2-22: Suitable for emergency installations as central supply, non-maintained (Z0)

Light symbol

VW / VW

Product colour

- 01
Black
RAL 9011

Technical information

Light source	1 & 1 COB
Light source type	COB
Dimming type	DALI
Material	Aluminium
Weight	2.7 kg
Operating temperature	-20 °C to 40 °C

Technical information

Luminaire	
Power (Luminaire)	28 W
Lumen (Luminaire)	1898 lm
Efficacy	68 lm/W
CCT / CRI	3000K CRI80
Drive current	350 mA
Driver option	Integral control gear
Driver	Constant current (CC)
Input voltage	220-240 V 50/60 Hz

Optic	VW
Optic value	71°
Optic (Up)	VW
Optic value (Up)	71°

Light source	
MacAdam Ellipse	3 SDCM
Lifetime L90B10 (hours)	55,000

We reserve the right to make technical and design changes.

10:43, 08-07-2022

https://www.ligman.com/je-30361-vw-vw-w30-da-01/

Europe
LIGMAN EUROPE s.r.o.
VGP Park Ústí nad Labem
P 2 120
40317, Přestanov
Czech Republic
+420 477 071 500
sales.cz@ligman.com

ASIA PACIFIC
LIGMAN Lighting Co.,Ltd.
17/2 Moo4 Monthong
Bangnampreaw
24150, Chachoengsao
Thailand
+66 2 108 6700
info@ligman.com

JET 36 - JE-30361 - 1 & 1 COB - 28 W - 71° (DOWN) - 71° (UP) - 3000K CRI80 - DALI - BLACK

JE-30361-VW-VW-W30-DA-01

Cone diagram

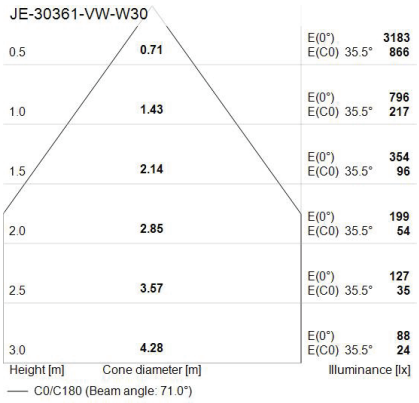

Polar diagram

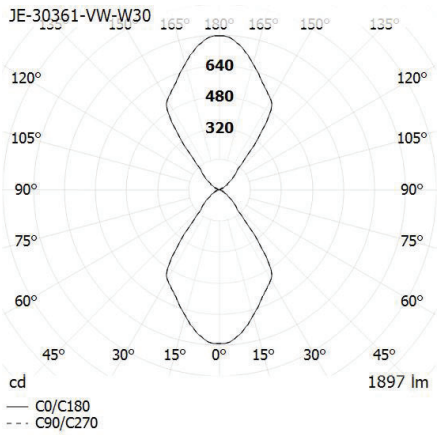

Accessories

Surface mounting box for easy cabling (JET 36)
SCE-JET-36

DALI Control System
Control-DALI

Inrush current

Inrush current	5 A / 50 µs

Maximum number of luminaires of this variant per miniature circuit breaker:

B 10A	31 luminaires
B 16A	50 luminaires
B 20A	62 luminaires
C 10A	52 luminaires
C 16A	85 luminaires
C 20A	104 luminaires

We reserve the right to make technical and design changes.

10:43, 08-07-2022

https://www.ligman.com/je-30361-vw-vw-w30-da-01/

Europe
LIGMAN EUROPE s.r.o.
VGP Park Ústí nad Labem
P 2 120
40317, Přestanov
Czech Republic
+420 477 071 500
sales.cz@ligman.com

ASIA PACIFIC
LIGMAN Lighting Co.,Ltd.
17/2 Moo4 Monthong
Bangnampreaw
24150, Chachoengsao
Thailand
+66 2 108 6700
info@ligman.com