
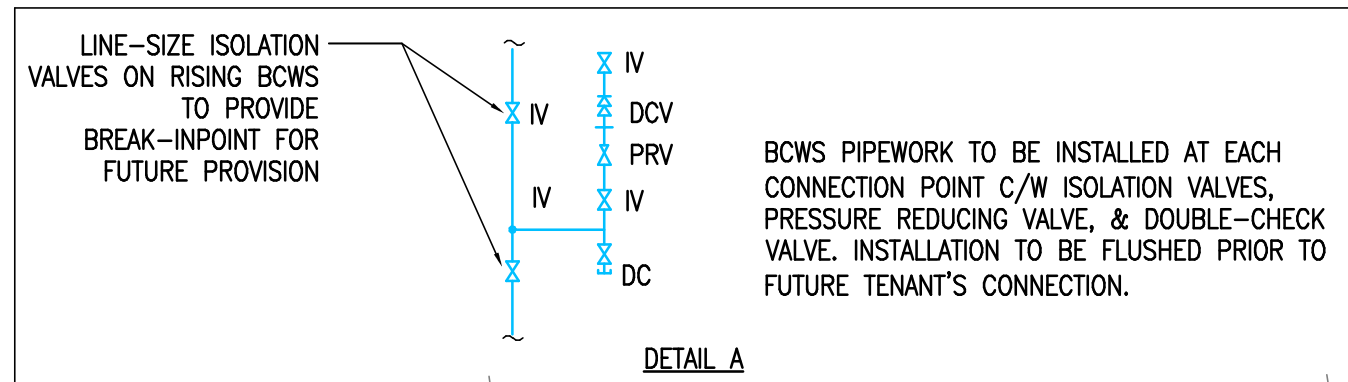


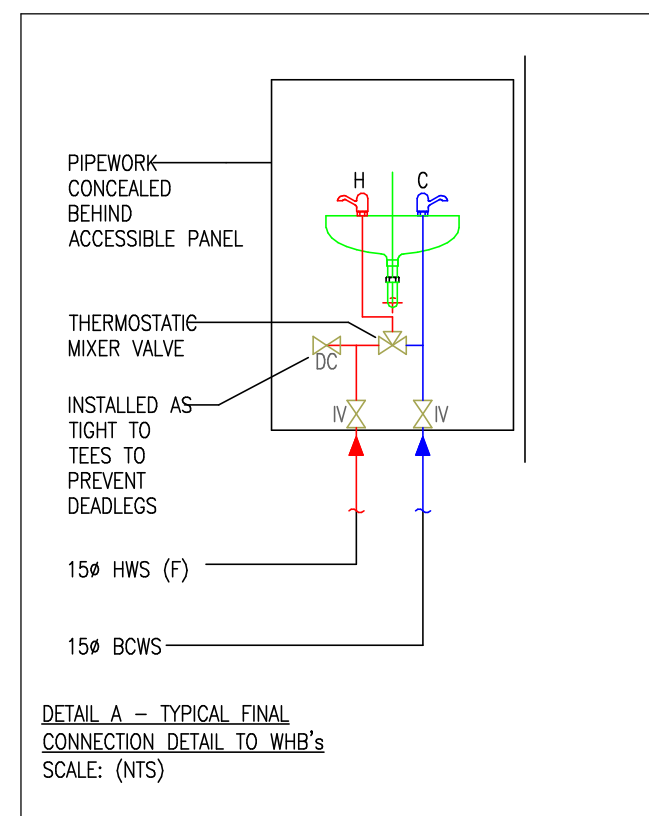

THIS DRAWING IS FOR INFORMATION ONLY. DO NOT SCALE			
COM REGULATIONS			
REMARKS	DATE	DATE ISSUED	ISS. AUTHORIZED DATE
<p><u>DOMESTIC WATER SUPPLY NOTES:</u></p> <ol style="list-style-type: none"> 1. DRAWING TO BE USED IN CONJUNCTION WITH SPECIFICATIONS & SCHEMATICS. 2. REPORT ANY DISCREPANCIES TO THE DRAWING ORIGINATOR IMMEDIATELY. 3. ALL MATERIALS TO BE 100% UNLESS STATED OTHERWISE. 4. DOMESTIC SERVICES SHALL COMPLY WITH THE ASH ENR, CIBSE & ALL DOMESTIC PIPING REGULATIONS & HSE ACOP FOR LEGISLATION PROTECTION. 5. SUITABLE COLD FLOW PREVENTION MUST BE PROVIDED. 6. ALL DOMESTIC PIPING SHALL BE COPPER TO BS EN 1057 (FORMERLY L8). 7. ALL PIPING SHALL BE TO 100% UNLESS STATED OTHERWISE. 8. ALL FINAL CONNECTIONS SHALL BE COMPLETE WITH FINAL SERVICE VALVE. 9. FLOW RESTRICTORS SHALL BE FITTED TO ALL TAPS TO ACHIEVE A FLOW RATE OF 12 LITRES PER MINUTE. 10. TAPS (THERMOSTATIC MIXING VALVES) SHALL BE PROVIDED TO ALL WASH BASINS. APPLIANCES WITHOUT THIS SHALL HAVE WARNING NOTICES TO INFORM USERS THAT WATER IS HOT AND MAY SCALD. 11. ALL LOW POINTS SHALL BE PROVIDED WITH DRAIN COCKS. 12. PIPESWORK SHALL BE THERMALLY INSULATED, EXCEPT ON EXPOSED FINAL CONNECTIONS, WITH VARIOUS BARRIERS FOR COLD SERVICES. 13. ANY EXTERNAL PIPESWORK SHALL BE TRACE HEATED. 14. ALL PIPERS SHALL BE REMOVED DURING FLUSHING & REPLACED WITH STOP COCKS. 15. ALL PIPING SHALL BE ROOFED IN. 16. VALVES LOCATED ABOVE SLOPE CELINGS SHALL BE PROVIDED WITH SUITABLE ACCESS. 17. ALL PENETRATIONS OF FLOOR COMPARTMENTS SHALL BE TIGHTENED TO PREVENT FLOOD AFFILIANCE. 18. KITCHENETTE & TAPPOINT CONNECTIONS SHALL BE TERMINATED AT THE FINAL AFFILIANCE, WITH FINAL CONNECTION BY OTHERS. 			

LEGEND	
	BOOSTED COLD WATER SERVICE (BCWS)
	MAINS COLD WATER SERVICE (MCWS)
	HOT WATER FLOW (HWS F)
	HOT WATER RETURN (HWS R)
	CAT 5
	SPRINKLER MAIN
	TRACE HEATING
IV D=	ISOLATION VALVE
PRV H=	PRESSURE REDUCING VALVE
	TEMPERATURE SENSOR
	PUMP
	DRAIN COCK
DCV H=	DOUBLE CHECK VALVE
	METER
SV H=	SAFETY RELIEF VALVE
NRV H=	NON RETURN VALVE
	EXPANSION BELLOWS
	ANCHOR POINTS
	PRESSURE DETECTOR
BB	BALL VALVE
FG	FLUSHING VALVE
PG	PRESSURE GAUGE
BMS	BUILDING MANAGEMENT SYSTEM
AAS	AUTOMATIC AIR VENT
TRPV	TEMPERATURE / PRESSURE GAUGE
TRPR	TEMPERATURE / PRESSURE RELIEF
LBV	VALVE LEVER BALL VALVE
LSV	LOCKSHIELD VALVE
TS	TEMPERATURE SENSOR
DF	WATER FOUNTAIN (DRINKING)
WB	WATER BOILER
DW	DEHWASHER
WM	WASHING MACHINE
TBV	THERMAL BALANCING VALVE
MI	ICE MACHINE
FC	FUME CUPBOARD
DS	DOCKING STATION
WB	WATER BOILER
FS	FLOW SWITCH
SV	SOLENOID VALVE
DTL	DOWN TO LOW LEVEL
	WATER HEATER

P01	24.07.24	ISSUED FOR COMMENT & APPROVAL	DB	SH
REV	DATE	AMENDMENTS	BY	CKD

**FOR COMMENT
& APPROVAL**

Commercial Services Design Ltd
Unit 5
Woodside Court
Clayton Wood Rise
Leeds
LS16 8RF
Tel: 0113 3223190
Web: www.csdesign.uk.com



CLIENT
G&H BUILDING SERVICES

PROJECT
**SUNLIGHT HOUSE
LITTLE QUAY STREET
MANCHESTER M3 3HP**

TITLE
**MECHANICAL SERVICES DOMESTIC WATER
LAYOUT BASEMENT**

SCALE @ A0: 1:100	CSD REF: CSD 1298
DRAWN: MW	ENGINEER: DB
STARTED: MAY 24	ISSUED: JULY 24
CHECKED: DB	APPROVED: BW
DRAWING NO. 1298-CSD-XX-B1-DR-M-5300	
REV: P01	

Project-Originator-Volume-Level-Type-Discipline-DrawingNumber