© Copyright: All rights reserved. This drawing must not be reproduced without permission.
Do not scale from this drawing. All dimension are in millimetres unless otherwise stated.
Any discrepancies should be reported to the Architect.

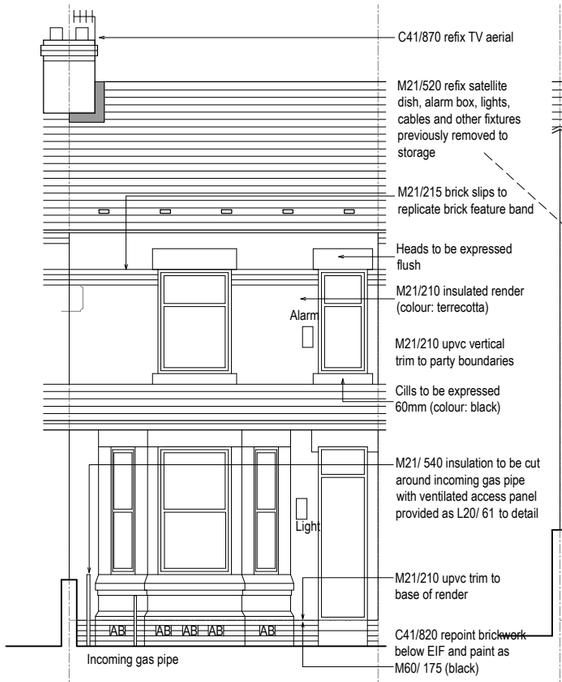

FRONT ELEVATION (A)

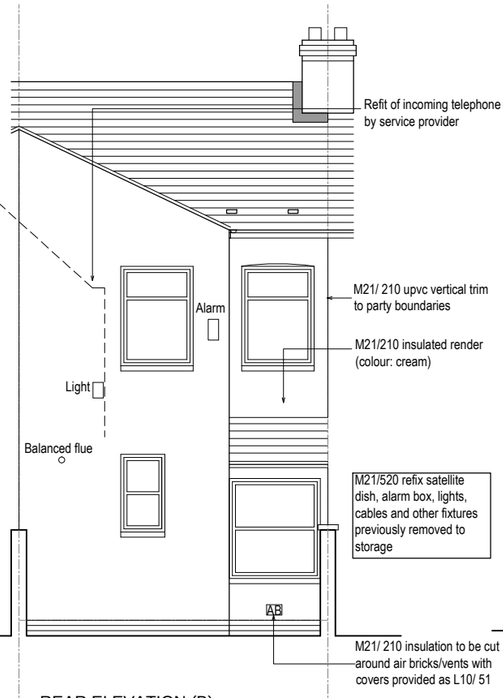

REAR ELEVATION (B)

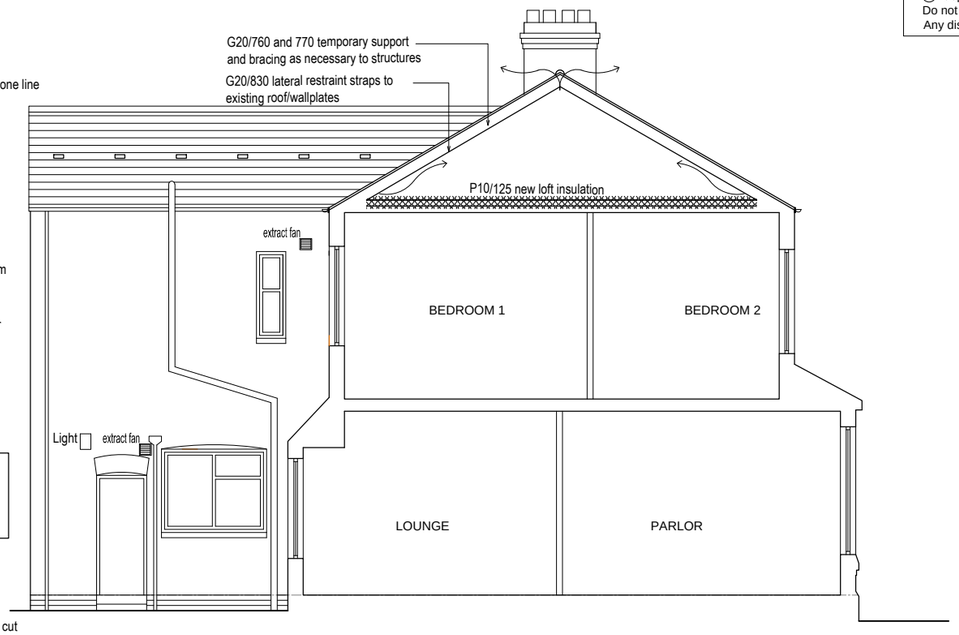

SECTION / ELEVATION (C)

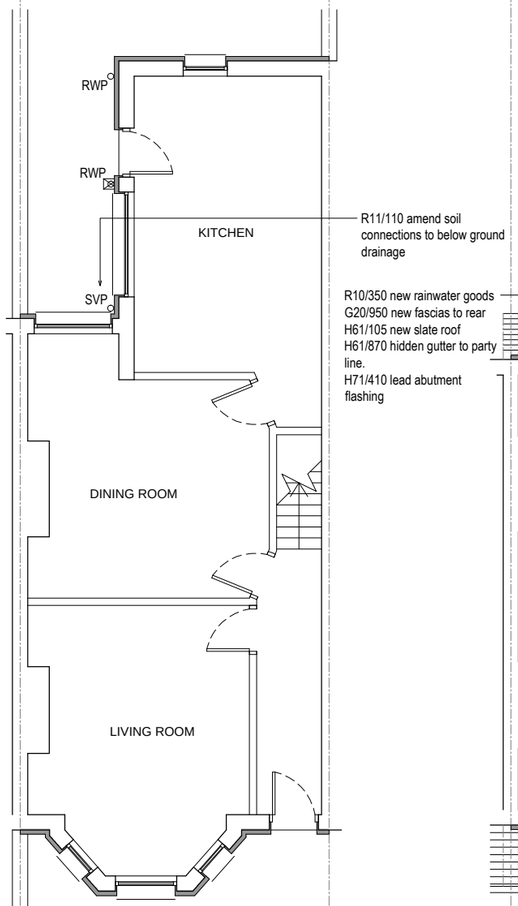

GROUND FLOOR PLAN

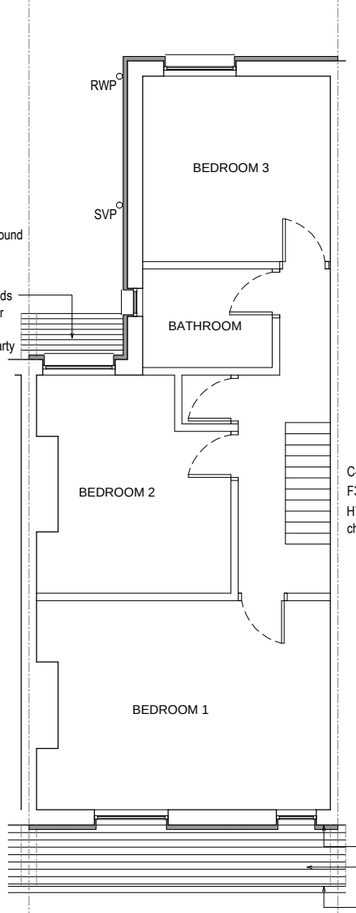

FIRST FLOOR PLAN

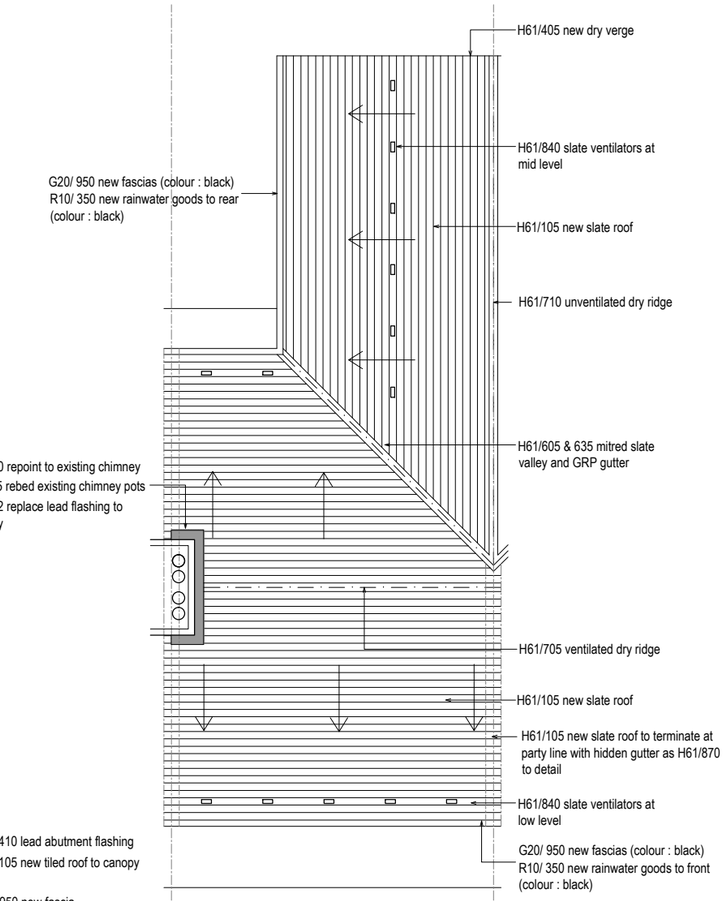

ROOF PLAN

GENERAL NOTES

All work is to be in accordance with Current Building Regulations. relevant British Standards, Codes of Practice and to the approval of the Local Authority.

Figured dimensions are to take preference over those scaled. All dimensions are to be checked on site prior to commencement of work on site.

The Contractor shall be responsible for checking all component references and sizes prior to ordering materials. The manufacturers recommendations with regards to handling, storage, and installation must be strictly adhered to.

The requirements of the Construction (Design and Management) Regulations 1994 will apply to this contract.

The contractor is to visit all properties during the tender process to ascertain the extent of works as described in the tender documents.

CONSTRUCTION NOTES

Previous Works:
The property has been subject to a previous refurbishment contract which included but was not limited to the following;
- Replacement PVC-U doors and windows
- Replacement of soil, waste and rainwater goods to front and rear.
- Provision of new kitchen and bathroom
- Installation of new DPC to front and rear

Proposed Works:
In general terms, and subject to the full investigation, the works carried out under this contract shall include but not may be limited to the undernoted:

Demolition/Strip Out:
Generally the following works are to be undertaken in as NBS C20:
- Remove and dispose of all existing rainwater goods
- Remove and dispose of all existing soil and waste goods
- Remove and dispose of all timber fascias and barge boards
- Carefully remove all lights, satellite dishes, wall brackets, handrails etc and store for re-use.
- Carefully remove and dispose of all coverings to main and ancillary roofs.
- Temporary removal of fixing brackets for incoming telephone service by service provider.

Damp Proof Course:
No damp issues reported. Extent of any dpc and associated works shall be determined on site as NBS C11 if instructed by CA.
- Installation of dpc shall be in accordance with NBS C45
- Replastering to affected areas as NBS N20

External Wall:
Works to front and rear solid walls shall include the following:
- Repairs and removal of fittings as NBS C41
- Repointing below DPC/EIF level as NBS C41
- Installation of EIF system as NBS M21
- Painting exposed brickwork below DPC/EIF level as NBS M60
- Refixing/reinstating previously removed items (inc incoming telephone service) as NBS M21

Windows/ Doors
- Retain existing UPVC windows.
- Existing stone/brick cills shall be expressed (60mm projection) to front only
- Profile of existing stone/brick lintels to window/door heads shall be expressed (flush) to front only
- Extended pvc-u cills to be provided to rear windows only

Roof:
- Repairs to roof timbers deemed necessary following survey as NBS C51and C52
- Remedial works to roof as NBS G20
- Installation of slate and ridge ventilation to main roof as NBS H61
- Installation of slatet ventilators to rear ancillary roof as NBS H61
- Replacement of coverings to the main and ancillary roofs NBS H61
- Replacement of timber fascias to rear with PVC-U items as NBS G20

Chimneys:
- Repointing and re-flaunching shared chimney stacks to client side as NBS C41
- Provision of new new flashing's as NBS H71
- Rebedding previously replaced chimney pots/vent terminals as NBSC41
- Works to shared stacks to Client side only

Loft Insulation:
- Installation of thermal insulation to the main and ancillary roof spaces as NBS P10

Drainage:
- Replace all rainwater goods as NBS R10
- Replace soil and waste goods as NBS R11
- Amend existing below ground drainage to suit new SVP position as NBS R12

Kitchen:
Not applicable unless dpc works are required. In which case the base units and worktops must be carefully removed, stored and refixed

Bathroom:
Not applicable

Revision	Description	Date	Drawn	Checked
-	First Issue. Issued for Comment/Approval.	25.01.13	MB	DW

P LANNING

Halliday Meecham Architects Limited
111 Piccadilly, Manchester M1 2HY
t: +44 (0)161 661 5566
f: +44 (0)161 661 5567
e: hma@hallidaymeecham.com
w: www.hallidaymeecham.com

architecture
interior design
space planning
urban planning
project management
planning supervisors

Halliday Meecham

Client:	EASTLANDS HOMES
Project:	Eastlands Homes Miscellaneous Properties
Phase / Location:	External Refurbishment
Drawing:	18 Borwell Street, M18 8FH As Proposed

Scale @ A1	Scale @ A3	Date:	Drawn:	Checked:	Job No.	Drawing No.	Revision
1:50	1:100	22.01.13	MB	DW	4398	(2-) 92	