



Technical Submission

Project	Sunlight House, Manchester	Project Ref.	1394
Tech Sub Ref.	TS-M- 0016	Issued By	Lee Holland
Date	12/07/2024	Authorised	Daniel Broxhome

Technical Submission	Sump Pumps Rev 1		
SPECIFICATION COMPLIANCE	✓	CSD1298-ZZ-ZZ-SH-M-52001	
DEROGATIONS		N/A	
CALCULATIONS PROVIDED		N/A	

This technical submission has been issued by G&H Building Services Ltd for the approval of Sump Pumps

Sump Pumps

WC and WHB - Saniflo - Sanibest Pro
Kittionettes - Saniflo - Sanispeed +

Information Required From	Myco
Latest Date Required	26/07/2024

Acceptance/Refusal			
STATUS A	STATUS B	STATUS C	

Response From	
Response Date	

SUMP PUMP SCHEDULE	
--------------------	--

Project:	Sunlight House - Manchester
Project No:	CSD1298
Revision:	Rev 1 (selections updated to align with Saniflo recommendations & BMS fault omitted)
Schedule No:	1298-CSD-ZZ-ZZ-SH-M-52001
Date:	28.06.2024

[illegible]

Notes:

Sanibest Pro



7 m
110 m



PRODUCT BENEFITS

- High performance macerator
- Suitable for commercial premises
- Can deal with occasional obstructions
- Easy maintenance with access from the top of the unit

CONNECTIONS

← Discharge diameter ext. : 22/28/32 mm

→ External inlet diameter : 40/100 mm

- Access directly to the electrics via the lid



Pro X K2 grinder



TECHNICAL FEATURES

Number of inlets	4
External inlet diameter	40/100 mm
Discharge diameter ext.	22/28/32 mm
Max. incoming temperature	35°C
Min. shower tray height	150 mm
Activation level	85 mm
Voltage / Frequency	220-240 V / 50-60 Hz
Motor power	1100 W
IP Rating	IP44
Electrical class	I
Identification and logistics	
Gross weight	12 kg
EAN code	3308815013039
Product code	1053

PACK CONTAINS


Sanibest Pro, non-return valve, connectors, activated carbon filter included to neutralise odours

OPTIONAL EXTRAS


Sanialarm
Barcode: 3308810042799
Product code: 1095



CURVE

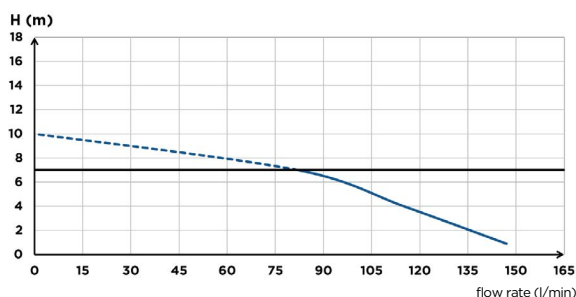

DIMENSIONS

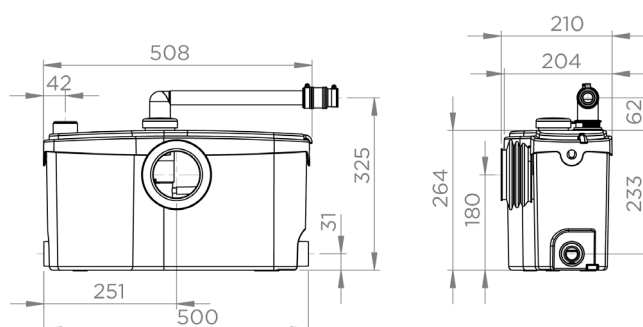

Sanispeed +



7 m
70 m



PRODUCT BENEFITS

- Pump suitable for commercial kitchen installation
- Low activation level
- Compatible with water softeners

CONNECTIONS

← Discharge diameter ext. : 32 mm

→ External inlet diameter : 40 mm



TECHNICAL FEATURES

Number of inlets	4
External inlet diameter	40 mm
Discharge diameter ext.	32 mm
Max. incoming temperature	75°C intermittently (max. 5 min)
Min. shower tray height	150 mm
Activation level	95 mm
Voltage / Frequency	220-240 V / 50-60 Hz
Motor power	400 W
IP Rating	IP44
Electrical class	I
Noise level	42 dB(A)
Identification and logistics	
Gross weight	7 kg
EAN code	3308815074054
Product code	6045

PACK CONTAINS


Sanispeed +, non-return valve, connectors, activated carbon filter included to neutralise odours

OPTIONAL EXTRAS

Sanialarm
Barcode: 3308810042799
Product code: 1095



CURVE

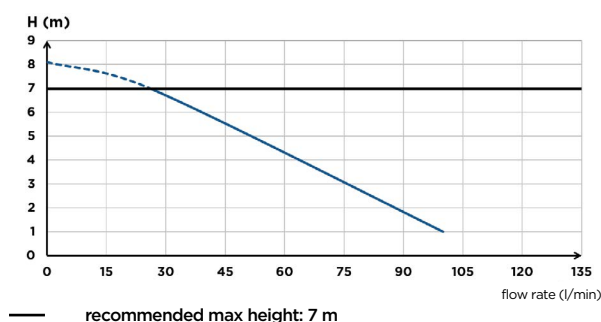

DIMENSIONS

