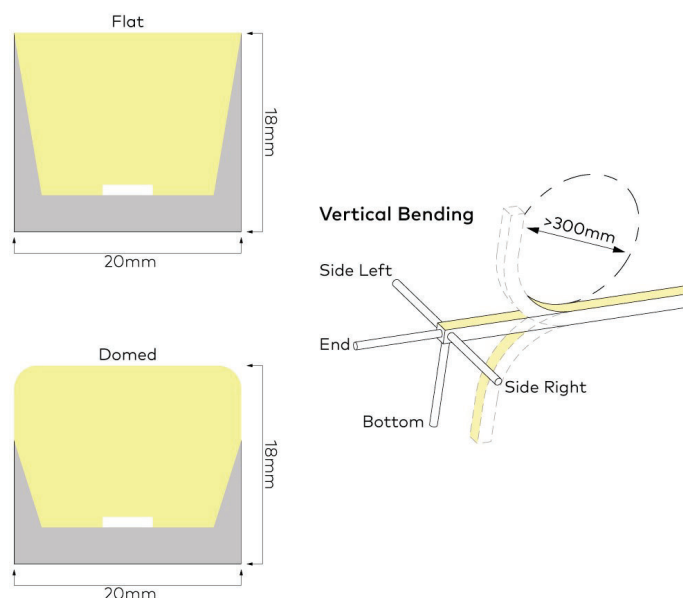




Luminaire Specification

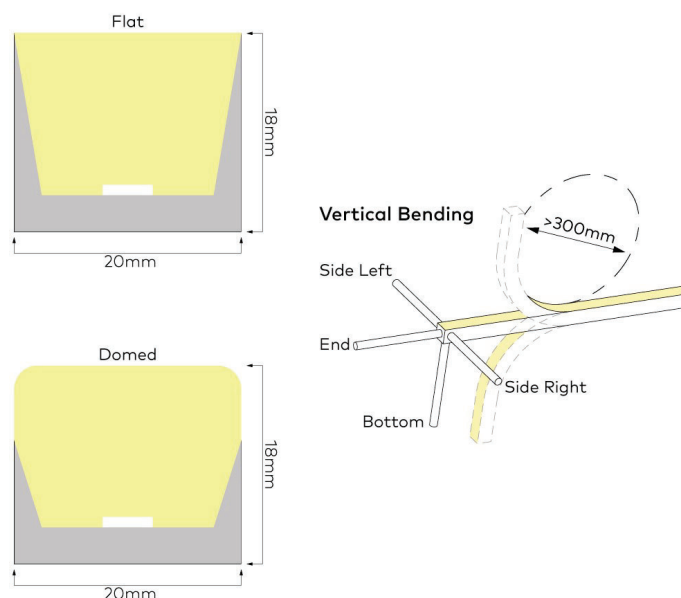
Driver	24VDC - To be ordered separately	Bending Plane	Vertical High Output
Material	Silicone	Jacket Colour	White
LED Binning	3 Step MacAdam ellipse	LED CRI/CCT	3000K CRI >80
Minimum Bend Diameter	Ø300mm	LED Type	13.5W/m (5m max.)
IP Rating	IP67	Cable Entry	End
Protection	UV, flame, salt and chlorine resistant	Connector IP	IP67
		Cable Length	10m
		Length	5005 mm
		LED Cut Point	62.5mm

Ordering Information

PERGOLA 11M (2 X 5.5M)

63S20HOV.1B30S13E7100.5005

Flex 20V - Mono - Vertical High Output : White : 3000K CRI >80 : 13.5W/m (5m max.) : End : IP67 : 10m : 5005 mm



Luminaire Specification

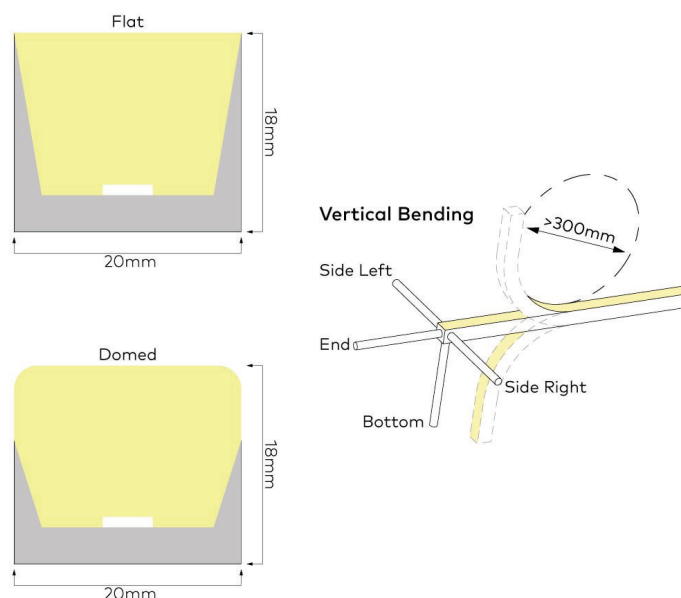
Driver	24VDC - To be ordered separately	Bending Plane	Vertical High Output
Material	Silicone	Jacket Colour	White
LED Binning	3 Step MacAdam ellipse	LED CRI/CCT	3000K CRI >80
Minimum Bend Diameter	Ø300mm	LED Type	13.5W/m (5m max.)
IP Rating	IP67	Cable Entry	End
Protection	UV, flame, salt and chlorine resistant	Connector IP	IP67
		Cable Length	10m
		Length	3005 mm
		LED Cut Point	62.5mm

Ordering Information

PERGOLA 3M

63S20HOV.1B30S13E7100.3005

Flex 20V - Mono - Vertical High Output : White : 3000K CRI >80 : 13.5W/m (5m max.) : End : IP67 : 10m : 3005 mm



Luminaire Specification

Driver	24VDC - To be ordered separately	Bending Plane	Vertical High Output
Material	Silicone	Jacket Colour	White
LED Binning	3 Step MacAdam ellipse	LED CRI/CCT	3000K CRI >80
Minimum Bend Diameter	Ø300mm	LED Type	13.5W/m (5m max.)
IP Rating	IP67	Cable Entry	End
Protection	UV, flame, salt and chlorine resistant	Connector IP	IP67
		Cable Length	10m
		Length	4755 mm
		LED Cut Point	62.5mm

Ordering Information

PERGOLA 8.5M (2 X 4.75M)

63S20HOV.1B30S13E7100.4755

Flex 20V - Mono - Vertical High Output : White : 3000K CRI >80 : 13.5W/m (5m max.) : End : IP67 : 10m : 4755 mm



Specification

Dimming Output Type	Voltage reducing	Model	DALI Dimming
Driver	Constant voltage		
Output Power	150W		
Input Supply	90-265VAC		
Output Voltage	24V		
Power Factor	> 0.95		
Dimming Type	DALI		
IP Rating	IP67		

Expected failure rate & life-time

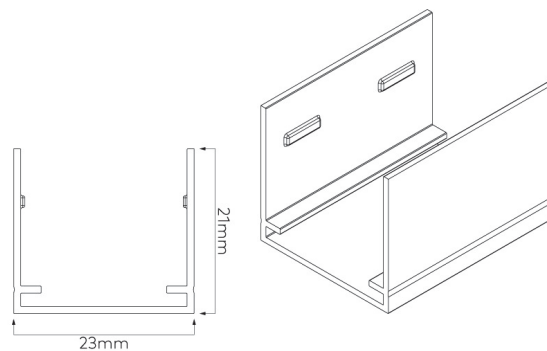
Failure rate	tc @ Max 80°C : <0.2% / 1000hrs
Life-time	ta 35°C : >70,000hrs, ta 50°C: >50,000hrs
	The LED Driver is designed for a minimum life-time stated above with a probability of less than 10% failure.

Ordering Information

PERGOLA DVR

47415.24167

150W / 24V CV / IP67 - DALI Dimming



Luminaire Specification

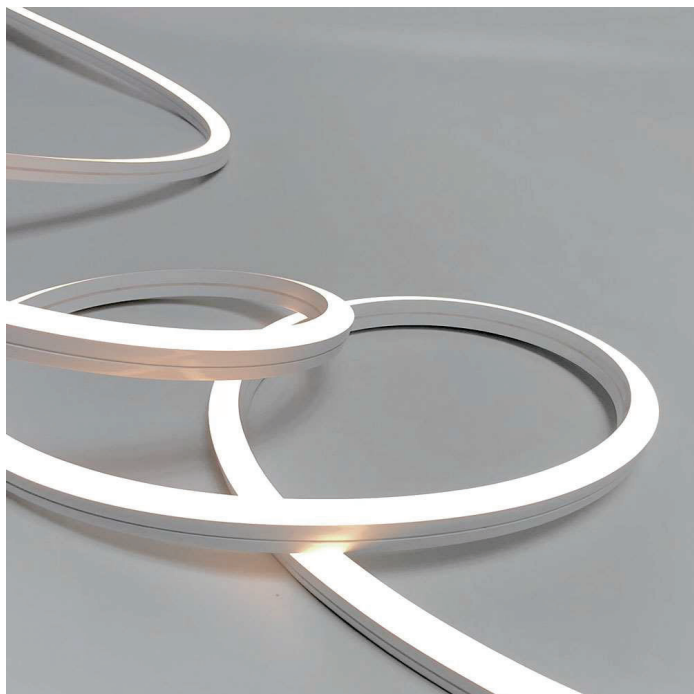

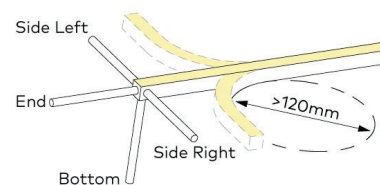
Material	Aluminium	Type	Aluminium Profile
Mounting Type	Surface mount	Length	1000mm

Ordering Information

PERGOLA SURFACE PROFILE 1M

63S20V.AP.1000

Flex 20V - Aluminium Profile - Aluminium Profile : 1000mm

**Horizontal Bending****Luminaire Specification**

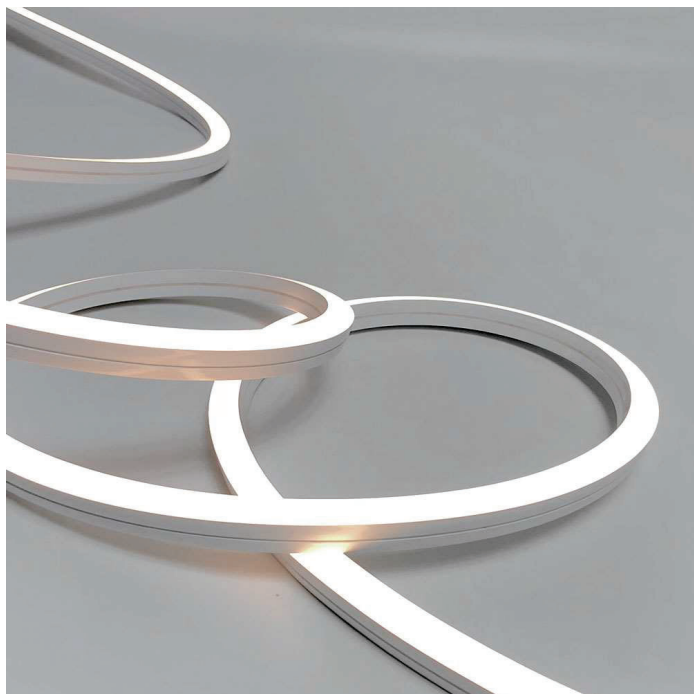

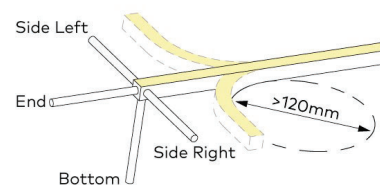
Driver	24VDC - To be ordered separately	Bending Plane	Horizontal High Output
Material	Silicone	Jacket Colour	White
LED Binning	3 Step MacAdam ellipse	LED CRI/CCT	3000K CRI >80
Minimum Bend Diameter	Ø120mm	LED Type	12W/m (15m max.)
IP Rating	IP67	Cable Entry	End
Protection	UV, flame, salt and chlorine resistant	Connector IP	IP67
		Cable Length	10m
		Length	14706 mm
		LED Cut Point	50mm

Ordering Information

PLANTERS/BENCHES 14.7M

63S15HOH.1B30S12E7100.14706

Flex 15H - Mono - Horizontal High Output : White : 3000K CRI >80 : 12W/m (15m max.) : End : IP67 : 10m : 14706 mm

**Horizontal Bending****Luminaire Specification**

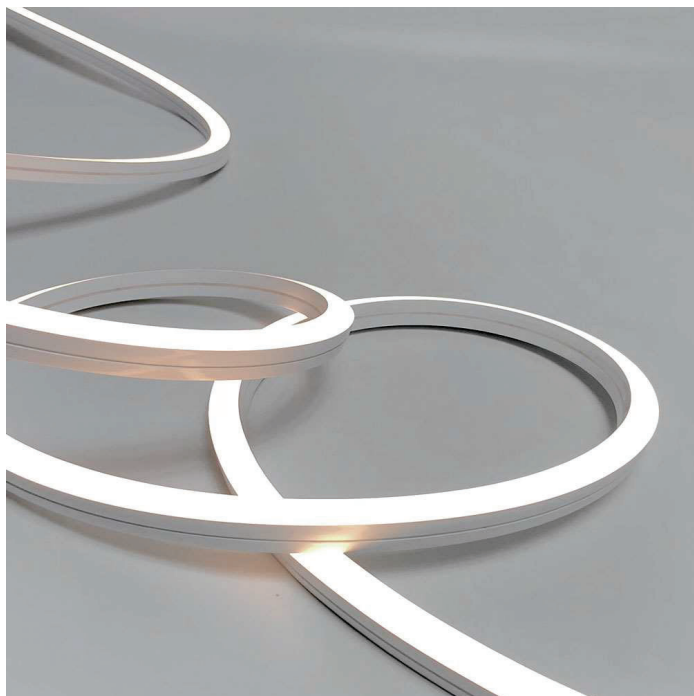

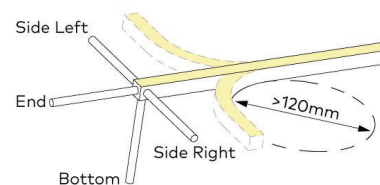
Driver	24VDC - To be ordered separately	Bending Plane	Horizontal High Output
Material	Silicone	Jacket Colour	White
LED Binning	3 Step MacAdam ellipse	LED CRI/CCT	3000K CRI >80
Minimum Bend Diameter	Ø120mm	LED Type	12W/m (15m max.)
IP Rating	IP67	Cable Entry	End
Protection	UV, flame, salt and chlorine resistant	Connector IP	IP67
		Cable Length	10m
		Length	9256 mm
		LED Cut Point	50mm

Ordering Information

PLANTERS/BENCHES 18.5M (2X9.25M)

63S15HOH.1B30S12E7100.9256

Flex 15H - Mono - Horizontal High Output : White : 3000K CRI >80 : 12W/m (15m max.) : End : IP67 : 10m : 9256 mm

**Horizontal Bending****Luminaire Specification**

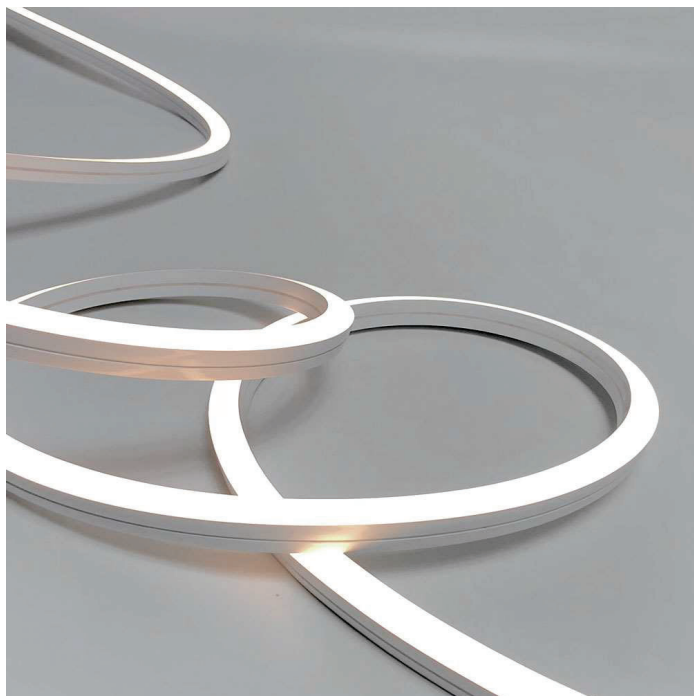

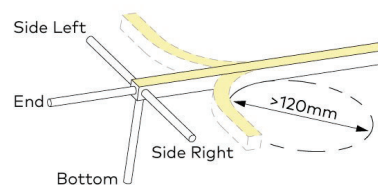
Driver	24VDC - To be ordered separately	Bending Plane	Horizontal High Output
Material	Silicone	Jacket Colour	White
LED Binning	3 Step MacAdam ellipse	LED CRI/CCT	3000K CRI >80
Minimum Bend Diameter	Ø120mm	LED Type	12W/m (15m max.)
IP Rating	IP67	Cable Entry	End
Protection	UV, flame, salt and chlorine resistant	Connector IP	IP67
		Cable Length	10m
		Length	14506 mm
		LED Cut Point	50mm

Ordering Information

PLANTERS/BENCHES 29M (2X14.5M)

63S15HOH.1B30S12E7100.14506

Flex 15H - Mono - Horizontal High Output : White : 3000K CRI >80 : 12W/m (15m max.) : End : IP67 : 10m : 14506 mm

**Horizontal Bending****Luminaire Specification**

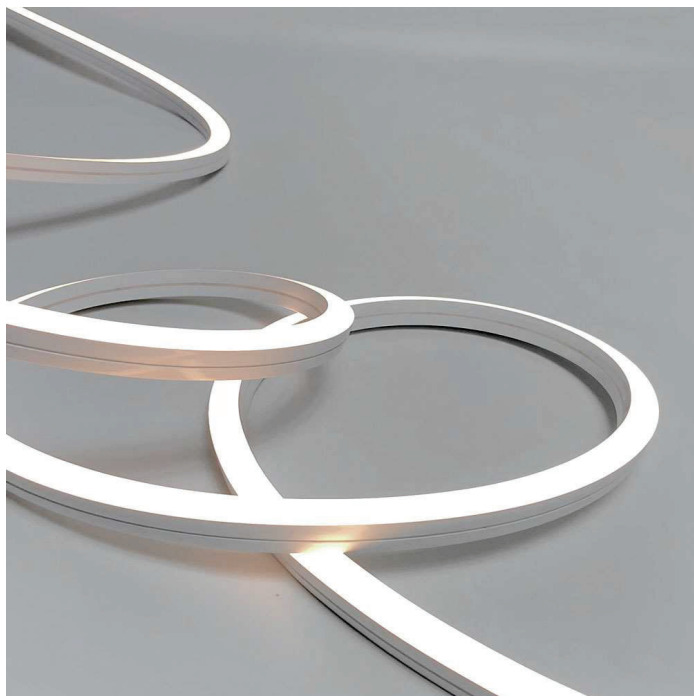

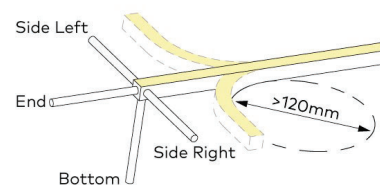
Driver	24VDC - To be ordered separately	Bending Plane	Horizontal High Output
Material	Silicone	Jacket Colour	White
LED Binning	3 Step MacAdam ellipse	LED CRI/CCT	3000K CRI >80
Minimum Bend Diameter	Ø120mm	LED Type	12W/m (15m max.)
IP Rating	IP67	Cable Entry	End
Protection	UV, flame, salt and chlorine resistant	Connector IP	IP67
		Cable Length	10m
		Length	15006 mm
		LED Cut Point	50mm

Ordering Information

PLANTERS/BENCHES 33.9M (15M)

63S15HOH.1B30S12E7100.15006

Flex 15H - Mono - Horizontal High Output : White : 3000K CRI >80 : 12W/m (15m max.) : End : IP67 : 10m : 15006 mm

**Horizontal Bending****Luminaire Specification**

Driver	24VDC - To be ordered separately	Bending Plane	Horizontal High Output
Material	Silicone	Jacket Colour	White
LED Binning	3 Step MacAdam ellipse	LED CRI/CCT	3000K CRI >80
Minimum Bend Diameter	Ø120mm	LED Type	12W/m (15m max.)
IP Rating	IP67	Cable Entry	Side Left
Protection	UV, flame, salt and chlorine resistant	Connector IP	IP67
		Cable Length	10m
		Length	3905 mm
		LED Cut Point	50mm

Ordering Information

PLANTERS/BENCHES 33.9M (3.9M)

63S15HOH.1B30S12SL7100.3905

Flex 15H - Mono - Horizontal High Output : White : 3000K CRI >80 : 12W/m (15m max.) : Side Left : IP67 : 10m : 3905 mm



Specification

Dimming Output Type	Voltage reducing	Model	DALI Dimming
Driver	Constant voltage		
Output Power	200W		
Input Supply	90-265VAC		
Output Voltage	24V		
Power Factor	> 0.95		
Dimming Type	DALI		
IP Rating	IP67		

Expected failure rate & life-time

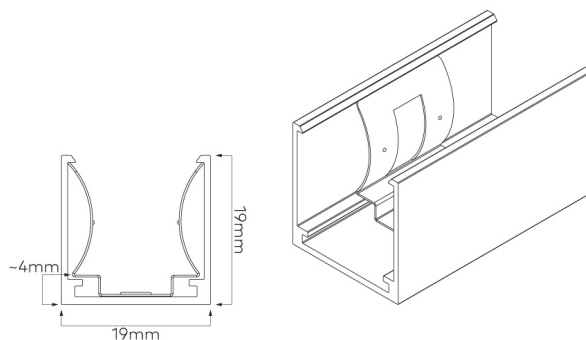
Failure rate	tc @ Max 80°C : <0.2% / 1000hrs
Life-time	ta 35°C : >70,000hrs, ta 50°C: >50,000hrs
	The LED Driver is designed for a minimum life-time stated above with a probability of less than 10% failure.

Ordering Information

PLANTERS/BENCHES DVR 15M MAX

47420.24167

200W / 24V CV / IP67 - DALI Dimming



Luminaire Specification

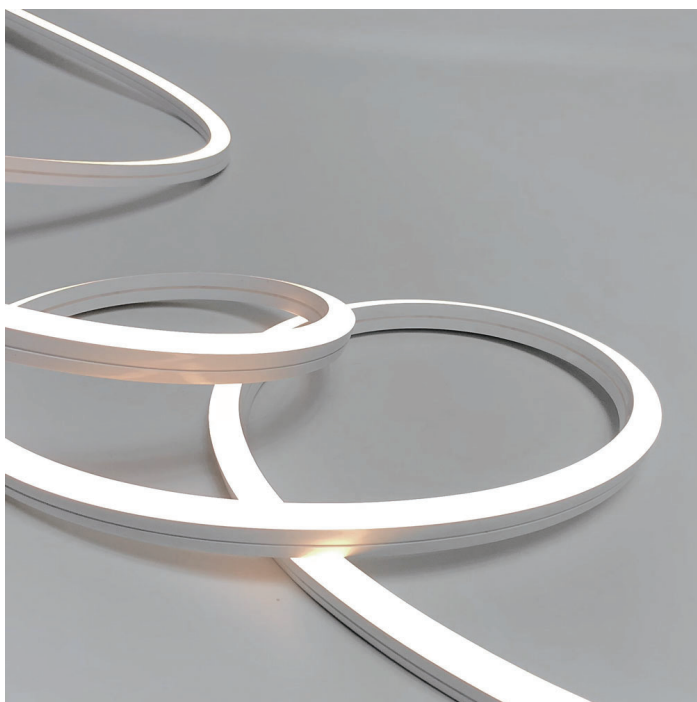

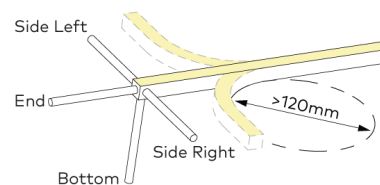
Material	Aluminium	Type	Locking Profile
Mounting Type	Surface mount	Length	1000mm

Ordering Information

PLANTERS/BENCHES PROFILE 1M

63S15X.LP.1000

Flex 15 - Locking Profile - Locking Profile : 1000mm

**Horizontal Bending**

Luminaire Specification

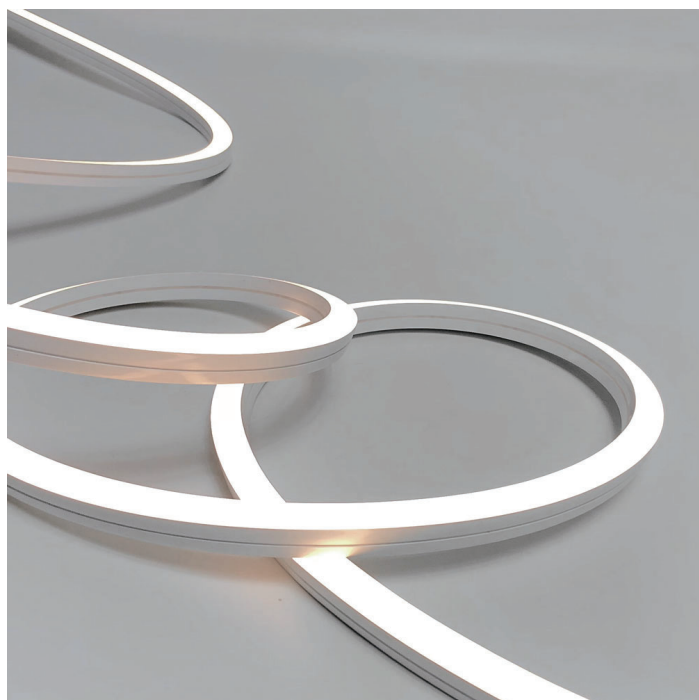

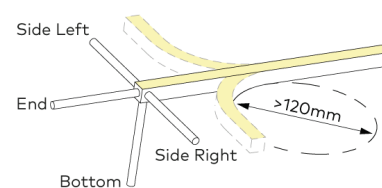
Driver	24VDC - To be ordered separately	Bending Plane	Horizontal High Output
Material	Silicone	Jacket Colour	White
LED Binning	3 Step MacAdam ellipse	LED CRI/CCT	3000K CRI >80
Minimum Bend Diameter	Ø120mm	LED Type	12W/m (15m max.)
IP Rating	IP67	Cable Entry	End
Protection	UV, flame, salt and chlorine resistant	Connector IP	IP67
		Cable Length	5m
		Length	1005 mm
		LED Cut Point	50mm

Ordering Information

COAT OF ARMS

63S15HOH.1B30S12E7050.1005

Flex 15H - Mono - Horizontal High Output : White : 3000K CRI >80 : 12W/m (15m max.) : End : IP67 : 5m : 1005 mm

**Horizontal Bending**

Luminaire Specification

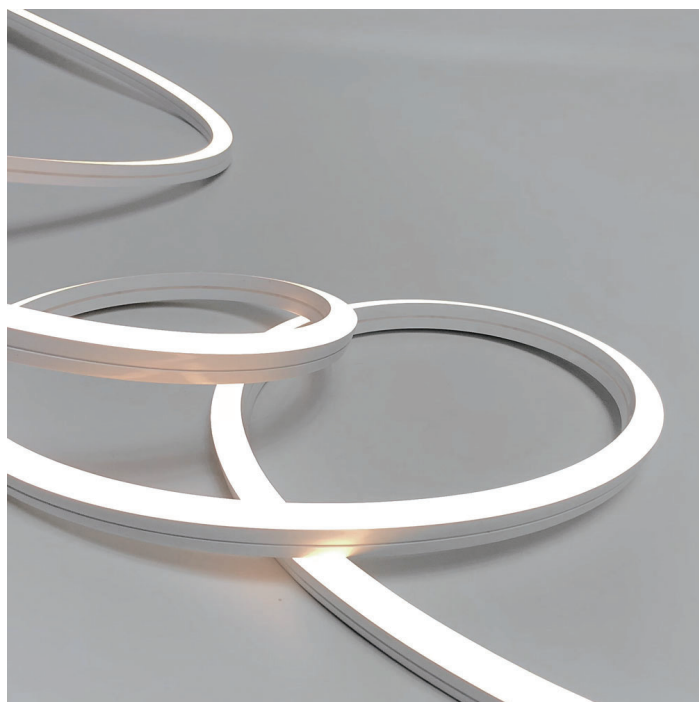

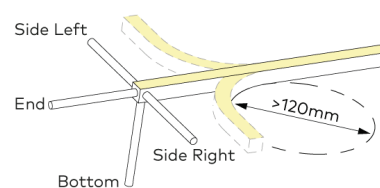
Driver	24VDC - To be ordered separately	Bending Plane	Horizontal High Output
Material	Silicone	Jacket Colour	White
LED Binning	3 Step MacAdam ellipse	LED CRI/CCT	3000K CRI >80
Minimum Bend Diameter	Ø120mm	LED Type	12W/m (15m max.)
IP Rating	IP67	Cable Entry	End
Protection	UV, flame, salt and chlorine resistant	Connector IP	IP67
		Cable Length	5m
		Length	10006 mm
		LED Cut Point	50mm

Ordering Information

FACADE 10M

63S15HOH.1B30S12E7050.10006

Flex 15H - Mono - Horizontal High Output : White : 3000K CRI >80 : 12W/m (15m max.) : End : IP67 : 5m : 10006 mm

**Horizontal Bending**

Luminaire Specification

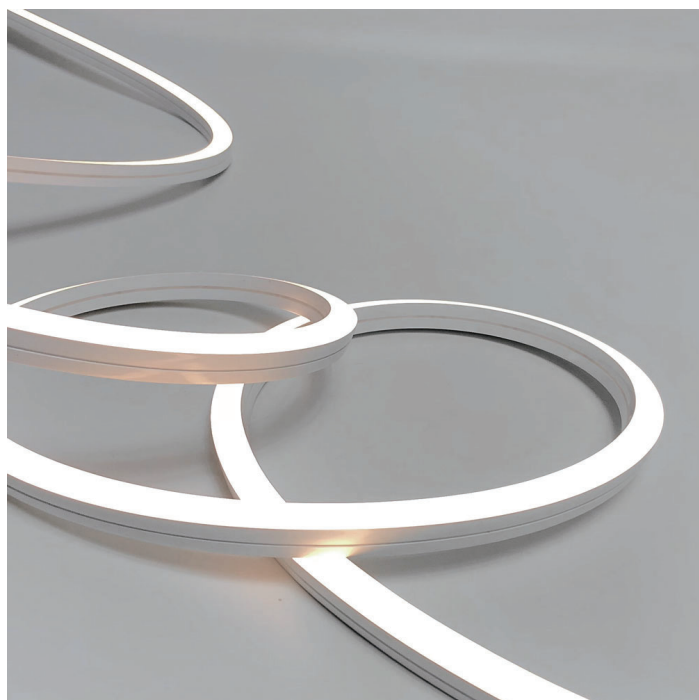

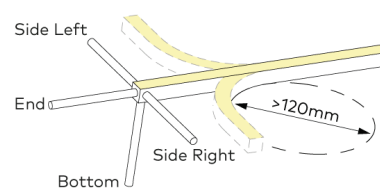
Driver	24VDC - To be ordered separately	Bending Plane	Horizontal High Output
Material	Silicone	Jacket Colour	White
LED Binning	3 Step MacAdam ellipse	LED CRI/CCT	3000K CRI >80
Minimum Bend Diameter	Ø120mm	LED Type	12W/m (15m max.)
IP Rating	IP67	Cable Entry	End
Protection	UV, flame, salt and chlorine resistant	Connector IP	IP67
		Cable Length	5m
		Length	5506 mm
		LED Cut Point	50mm

Ordering Information

FACADE 5.5M

63S15HOH.1B30S12E7050.5506

Flex 15H - Mono - Horizontal High Output : White : 3000K CRI >80 : 12W/m (15m max.) : End : IP67 : 5m : 5506 mm

**Horizontal Bending****Luminaire Specification**

Driver	24VDC - To be ordered separately	Bending Plane	Horizontal High Output
Material	Silicone	Jacket Colour	White
LED Binning	3 Step MacAdam ellipse	LED CRI/CCT	3000K CRI >80
Minimum Bend Diameter	Ø120mm	LED Type	12W/m (15m max.)
IP Rating	IP67	Cable Entry	End
Protection	UV, flame, salt and chlorine resistant	Connector IP	IP67
		Cable Length	5m
		Length	8506 mm
		LED Cut Point	50mm

Ordering Information

FACADE 8.5M

63S15HOH.1B30S12E7050.8506

Flex 15H - Mono - Horizontal High Output : White : 3000K CRI >80 : 12W/m (15m max.) : End : IP67 : 5m : 8506 mm



Specification

Dimming Output Type	Voltage reducing	Model	DALI Dimming
Driver	Constant voltage		
Output Power	150W		
Input Supply	90-265VAC		
Output Voltage	24V		
Power Factor	> 0.95		
Dimming Type	DALI		
IP Rating	IP67		

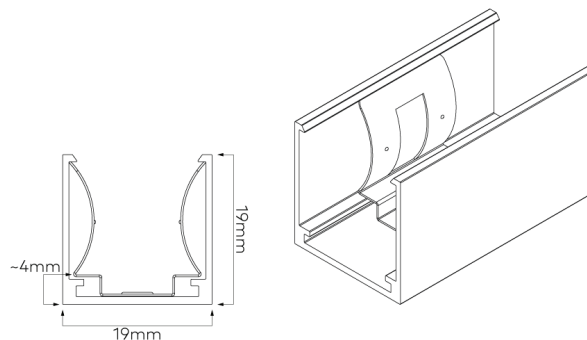
Expected failure rate & life-time

Failure rate	tc @ Max 80°C : <0.2% / 1000hrs
Life-time	ta 35°C : >70,000hrs, ta 50°C: >50,000hrs
	The LED Driver is designed for a minimum life-time stated above with a probability of less than 10% failure.

Ordering Information

FACADE DVR 1 PER 10M

47415.24167
150W / 24V CV / IP67 - DALI Dimming



Luminaire Specification

Material	Aluminium	Type	Locking Profile
Mounting Type	Surface mount	Length	1000mm

Ordering Information

FACADE PROFILE (COLOUR TBC)

63S15X.LP.1000

Flex 15 - Locking Profile - Locking Profile : 1000mm