

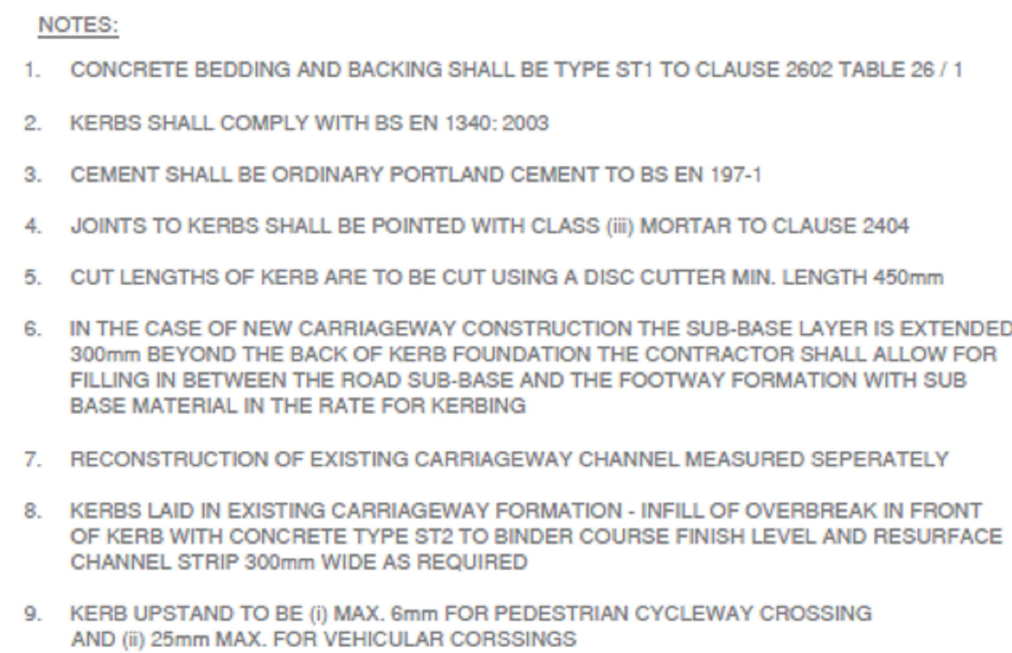
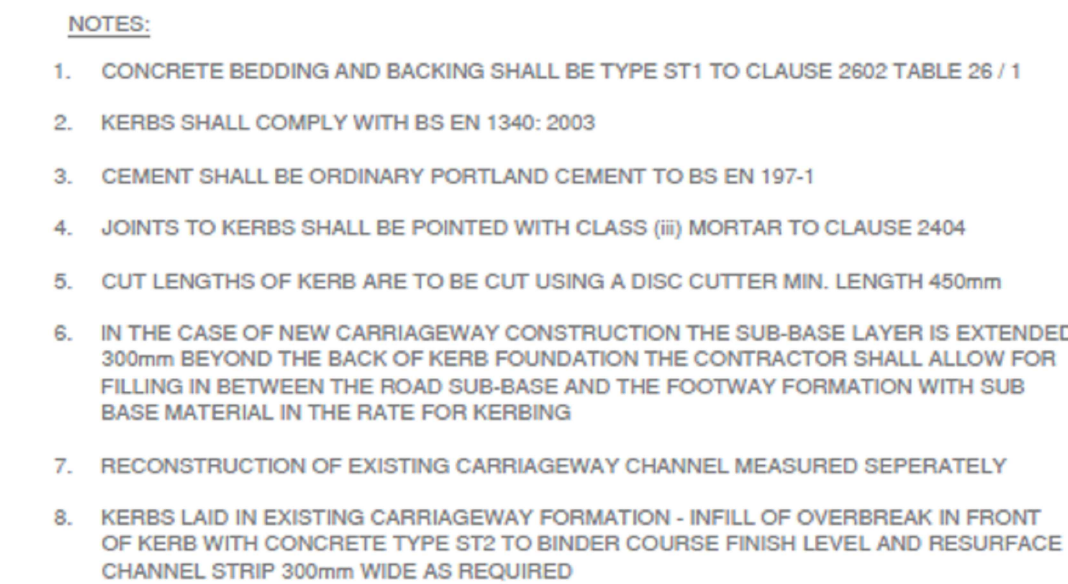
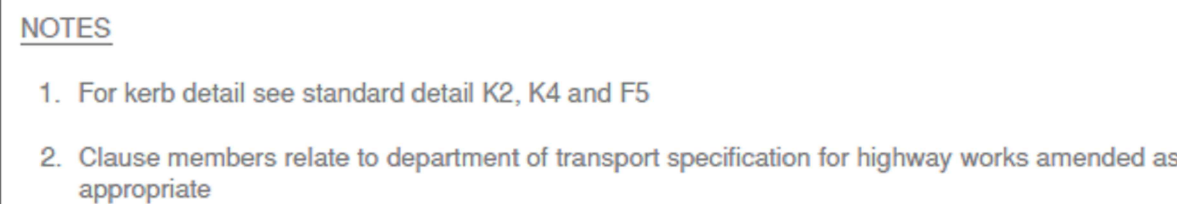
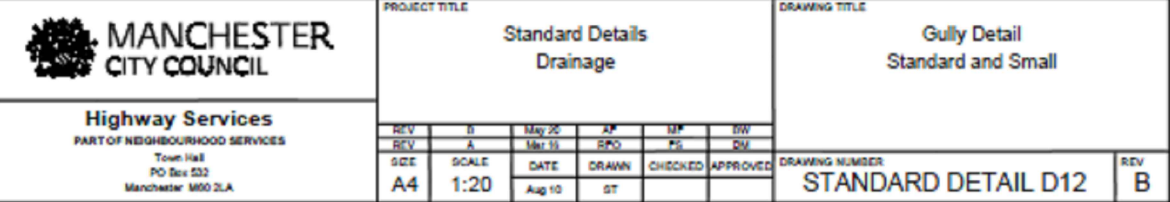
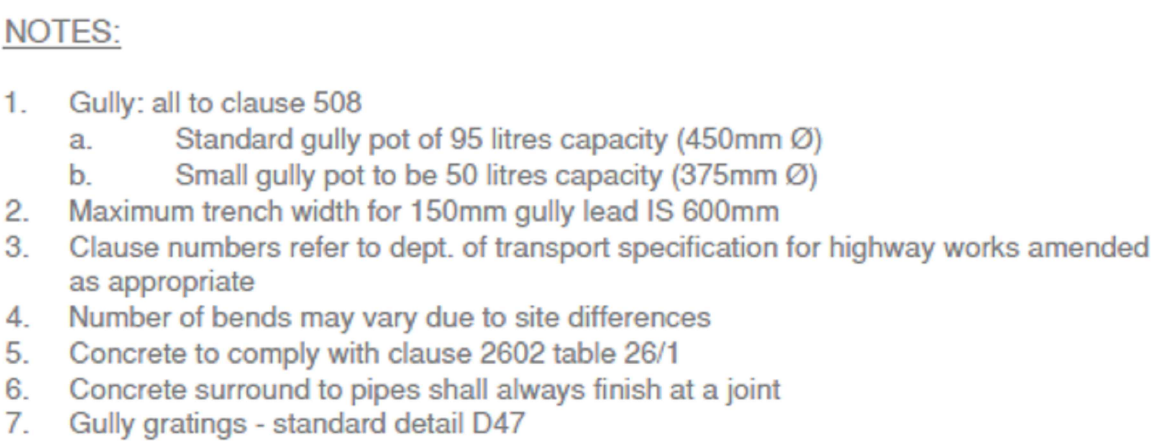


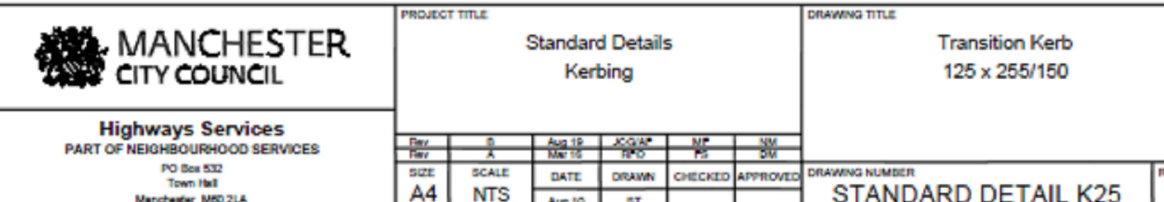

8. THE DUCTING SHALL CONFORM TO A DENSITY OF 0.9/cm3 DIN53479 WITH A BREAKINGPOINT OF 23-30N/mm2 DIN53455. THE DUCTING SHALL BE COMPATIBLE WITH THE APPROVED ACCESS CHAMBERS PRE-TREPANED KNOCKOUT. WHERE THE DUCTS NEED TO BE JOINED A MANUFACTURER APPROVED CONNECTOR MUST BE USED AND APPROVED BY THE OVERSEEING ORGANISATION.

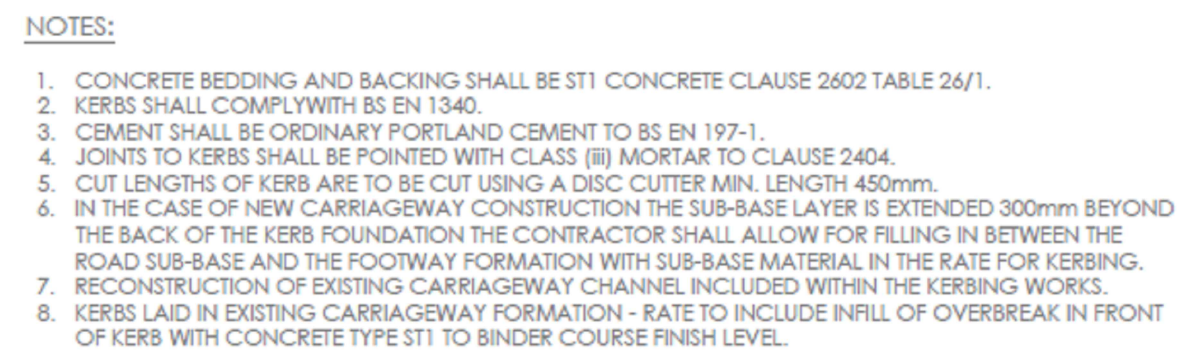

Eddisons