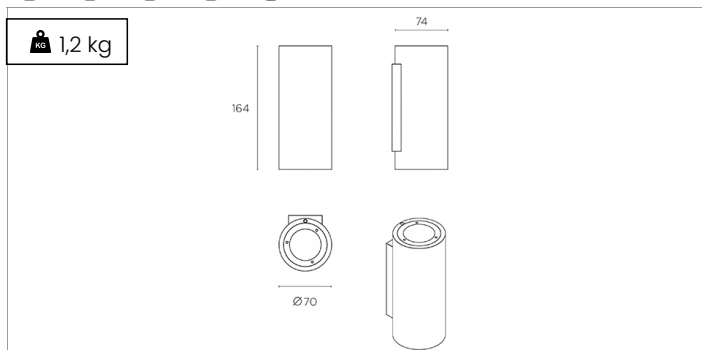


Project Name

Product Code **8401610S52SS**


Product Description

Square or round LED wall luminaire with two LED light sources for up/down light distribution. Die-cast aluminium body and glass sealed optical chamber. Available with nominal 2x5W (2x635lm) in 2700K, 3000K or 4000K in CRI95 or 3000K in CRI85. Lumen maintenance of 115,000 hrs at L80 B10. Natural powder coat finish options include carbon grey, mud brown, matt sand, matt white textured and rust effect. Optics choices include Spot (15°), Flood (21°), Medium (32°) and Wide (38°). PLAY is available with a range of optical accessories including honeycomb louvre (factory fitted) as well as coloured ring, snoot, visor and adjustable elliptical lens accessory 18°x40° (field changeable and to be ordered separately). Coloured rings are made from UV resistant PMMA and are available in translucent orange, translucent blue, translucent green and neutral. An external cover accessory is also available to order separately. This accessory covers the luminaire entirely so that the LED light sources are deep recessed behind the cover. This creates a sharp beam cut off and a more decorative look of the luminaire. Additional finish options to the before mentioned body finish options for this cover include copper textured, gold textured and dark bronze. Ingress protection of IP67. Class I luminaire including ON/OFF power supply.

Electrical characteristics

Isolation class	Class I - Earth contact
Version	UP/Down - 2x5w
Control	On-off

Mechanical features

Incandescent wire	850°
Protection class	IK08, IP67
Finish	Sand

Lighting characteristics

CRI-CCT	CRI95 2700K
UP Optic	Spot 15°
DOWN Optic	Spot 15°

Accessories

Primary optical accessories UP	Superior Honeycomb
Primary optical accessories DOWN	Inferior Honeycomb
Secondary optical accessories	Snoot-Visor WOLF
	Lente ellittica WOLF, Decorative ring, +
	Lente ellittica WOLF, Decorative ring, +
Connectors	Connectors
Decorative cover	Cover Round, Cover Square


Warranty

Lifetime	L80B10 115.000 h
Certification	CE Compliance
Warranty	5 years
Operating temperature	-10° / +30°

Configurator code

Housing body	PLAY Round
Version	UP/Down - 2x5w
Control	On-off
Finish	Sand
CRI-CCT	CRI95 2700K
UP Optic	Spot 15°
DOWN Optic	Spot 15°
Primary optical accessories UP <small>Unselected</small>	Superior Honeycomb
Primary optical accessories DOWN	Inferior Honeycomb

Unselected

Spot			UP/DOWN Opt.Spot		2700 K / Ra 95	
m	Ø	Lux	14.9°		Glaring	/
1	0.26	2405			UGR	16.0
2	0.52	601			Colour deviation	3 SDCM
3	0.79	267			Fixture power	5.0 W
4	1.05	150			Fixture flux	373.0 lm
5	1.31	96			Fixture efficacy	75 lm/W
			IMax 2405 cd		LED values	4.6 W 500.0 lm