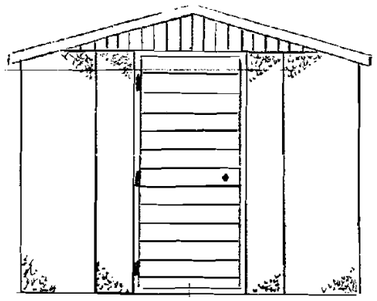

FRONT ELEVATION

9'-6"
2896mm

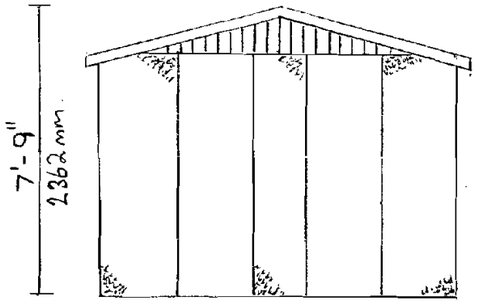

7'-9"
2362mm

REAR ELEVATION

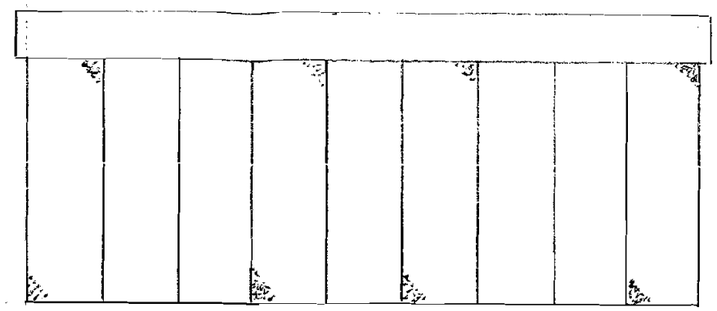

LEFT SIDE ELEVATION

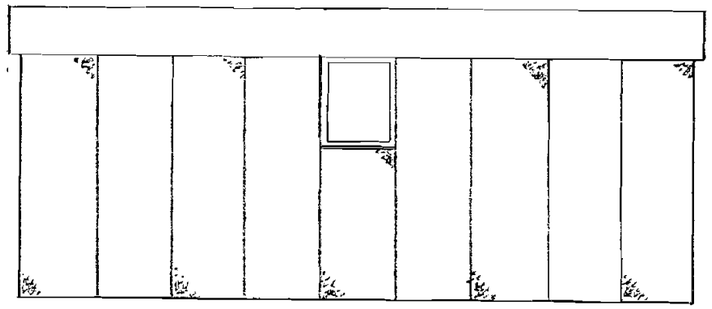

RIGHT SIDE ELEVATION

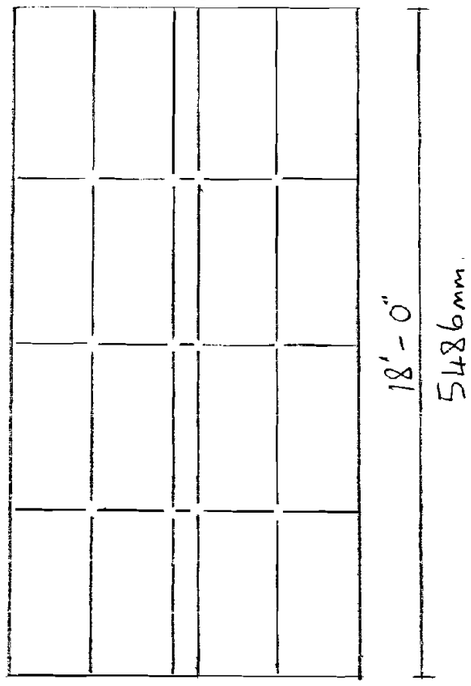

18'-0"
5486mm

PLAN VIEW

SCALE 1:50.

PROPOSED CONCRETE SHED FOR -

MR. I. AHMED
26 HEWLETT ROAD.
CHORLTON.
MANCHESTER.
M21 9RE.
TEL - (M) 07958917774

SUPPLIED BY -

CHESHIRE PORTABLE BUILDINGS
214 MANCHESTER ROAD
BROADHEATH.
ALTRINCHAM.
WA14 5LU.
TEL - 0161-928-6961



SPECIFICATION -

BASE — 4" THICK CONCRETE RAFT (1:2:4 MIX).
WALLS — PRE-CAST CONCRETE SECTIONS, BOLTED TOGETHER AND MASTIC SEALED. CANTERBURY SPAR EXTERIOR FINISH.
ROOF — CORRUGATED CEMENT FIBRE SHEETS, TOPPED WITH MATCHINGS RIDGE CAPPINGS IN GREY COLOUR. FIXED TO STEEL TRUSSES & PURLINS.
DOOR — GALV. STEEL, RIBBED, SIDEHUNG, WHITE.
WINDOW — TIMBER FRAMED, SINGLE GLAZED.
FASCIA'S — TIMBER, TREATED RED CEDAR.