


Project Name _____

Product Code **840241RSW52S+** _____

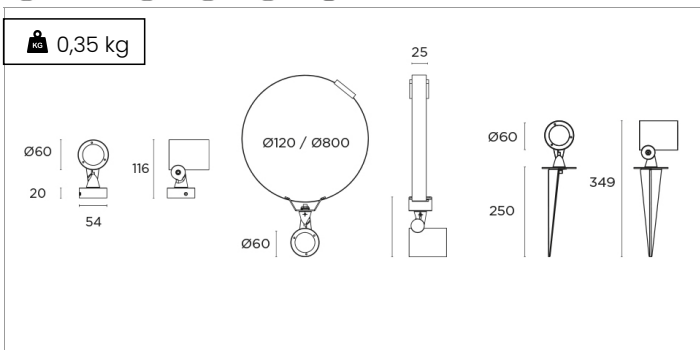

Product Description

LED projector with body in die-cast aluminium and glass sealed optical chamber. To be specified with remote power supply and a choice of wall mount, tree mount or stake mount options. The luminaire head allows for 305° rotation and 135° tilt. Available with nominal 7W (840lm) or 13W(1690m) in 2700K, 3000K or 4000K in CRI95 or 3000K in CRI85. Lumen maintenance of 115,000 hrs at L80 B10. Natural powder coat finish options include carbon grey, mud brown, matt sand, matt white textured and rust effect. Optics choices include Spot (15° for 7W and 19° for 13W), Flood (21° for 7W and 25° for 13W), Medium (32° for 7W and 37° for 13W) and Wide (38° for 7W and 54° for 13W). WOLF is available with a range of optical accessories including honeycomb louvre (factory fitted) as well as coloured ring, snoot, visor and adjustable elliptical lens (18°x40° for 7W or 23°x65° for 13W) (to be ordered separately). Coloured rings are made from UV resistant PMMA and are available in translucent orange, translucent blue, translucent green and neutral. Ingress protection of IP66. Class III luminaire for use with remote ON/OFF or DALI power supply.

Electrical characteristics

Isolation class	Class III
Class F	YES
Power	7W CV (24V/48V)
Control	Remote driver
Power supply	Remote driver 350mA, Remote driver 700mA, Remote driver DC 24V, Remote driver DC 48V

Mechanical features

Incandescent wire	850°
Protection class	IK08, IP66
Finish	Sand
Mounting system	Wall mounting
Remote driver protection rating	IP20, IP67

Lighting characteristics

CRI-CCT CRI95 2700K

Optic **Spot 15°**

Accessories

Primary optical accessories **Honeycomb**

Secondary optical accessories **Snoot-Visor WOLF**

+, Lente ellittica WOLF, Decorative ring

+, Lente ellittica WOLF, Decorative ring

Connectors **Connectors**

Warranty

Lifetime **L80B10 115.000 h**

Certification **CE Compliance**


Warranty **5 years**

Operating temperature **-10° / +30°**

Configurator code


Housing body	WOLF Projector
Power	7W CV (24V/48V)
Control	Remote driver
Finish	Sand
Mounting system	Wall mounting
CRI-CCT	CRI95 2700K
Optic	Spot 15°
Primary optical accessories	Honeycomb
Remote driver protection rating	IP20, IP67

Remote driver 350mA, Remote driver 700mA, Remote driver DC 24V, Remote driver DC 48V

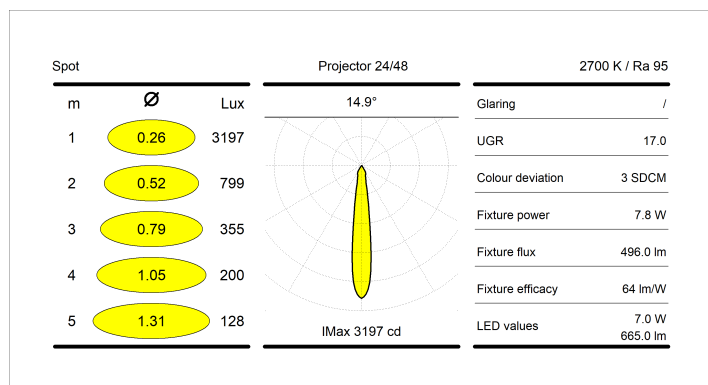


Accessories


Power supply




Remote driver 350mA



Remote driver 700mA



Remote driver DC 24V



Remote driver DC 48V