



TECHNICAL SUBMITTAL

Project: Fourways House, Manchester

Project No: F3-24-007

2nd Fix Accessories

Document Ref: TS-010

Issue Date: 23.4.24

Revision: 1

TECHNICAL SUBMITTAL

Doc Ref;	Equipment;	Revision No:	Date of Issue;	Response Req'd By;
TS-010	LV Distribution Board Upgrades	1	23.4.24	26.4.24

Attached Documents;

- scolmore_cl051_datasheet - Metal Clad Ceiling Spurs
- scolmore_cma035_datasheet - White Plastic Behind Kithchen
- scolmore_vp535_datasheet Single Socket
- scolmore_vp536_datasheet Twin Socket
- scolmore_vp551_datasheet Spur with FO
- scolmore_vp751_datasheet - Spur No FO

Distribution;

Client

Principal Contractor

Consultant

Comments;

As highlighted within the data sheet.

All, tenant facing accessories to be Black Nickel, white plastic behind kitchen and metal clad on ceilings.

Status / Approval;

A	☐	B	☐	C	☐
Approved		Approved Subject to Comments		Rejected	

Signature *B Lester*

Print B Lester

Date: 23.4.24

Company: Cubic Works

IF THIS DOCUMENT IS NOT RETURNED WITHIN THE REQUIRED PERIOD SET IN THE CONTRACT DOCUMENTS, THEN THIS SUBMITTAL SHALL BE DEEMED TO BE ACCEPTED AS STATUS 'A'

True Images Showing Black Nickel Colour



SPECIFICATION SHEET


Product Code VP*535#

Description

13A 1 Gang DP 'Ingot' Switched Socket Outlet

Black Nickel Sockets to be mounted to Trunking and singular PVC back boxes where trunking isn's shown.

Image below is indicative only,

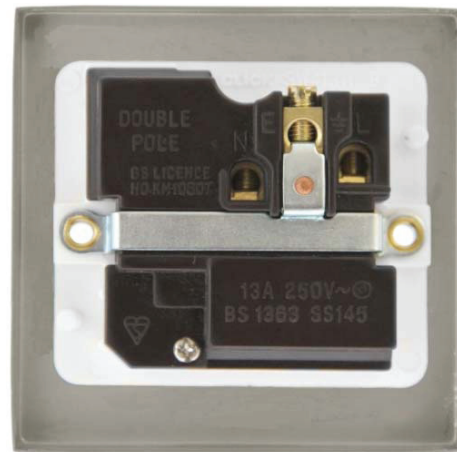

General Information	
Dimensions	88mm x 88mm x 8mm (Excluding Gasket)
Finishes Available	Replace * with: AB (Antique Brass), BN (Black Nickel), BR (Polished Brass), CH (Polished Chrome), PN (Pearl Nickel), SB (Satin Brass), SC (Satin Chrome), and SS (Stainless Steel).
Inserts Available	Replace # with: WH (White) and BK (Black). Black or White gasket supplied to match appropriate inserts. (Antique Brass and Black Nickel are only available with back inserts).
Material Composition	Rear Housing: Urea Front Plate: Stainless Steel Terminals: Brass Earth Strap: Mild Steel Terminal Screws: Steel and Yellow Passivated Silver "on-lay" copper/brass contacts.
Back Box Depth	35mm – 47mm
Cable Size	4 x 2.5mm ²
Terminal Size	Live: 5mm Neutral: 5mm Earth: 5mm
Switched	Yes
Double Pole	Yes
Twin Earth	No
Clean Earth	No
Neon	No
Warranty	10 Years Domestic
Standards	
BS 1363	
Additional Information	
Ensure that the mains supply is isolated before commencing installation and refer to the circuit diagram supplied with the relevant product. Bare earth cables must always be covered with appropriate sleeving and wired to the earth terminal.	

SPECIFICATION SHEET

Product Code VP*536#

Description 13A 2 Gang DP 'Ingot' Switched Socket Outlet

Black Nickel Sockets to be mounted to Trunking and singular PVC back boxes where trunking isn't shown.

Image below is indicative only,



General Information	
Dimensions	146mm x 88mm x 8mm (Excluding Gasket)
Finishes Available	Replace * with: AB (Antique Brass), BN (Black Nickel), BR (Polished Brass), CH (Polished Chrome), PN (Pearl Nickel), SB (Satin Brass), SC (Satin Chrome), and SS (Stainless Steel).
Inserts Available	Replace # with: WH (White) and BK (Black). Black or White gasket supplied to match appropriate inserts. (Antique Brass and Black Nickel are only available with back inserts).
Material Composition	Rear Housing: Urea Front Plate: Stainless Steel Terminals: Brass Earth Strap: Mild Steel Terminal Screws: Steel and Yellow Passivated Silver "on-lay" copper/brass contacts.
Back Box Depth	25mm – 47mm
Cable Size	4 x 2.5mm ²
Terminal Size	Live: 5mm Neutral: 5mm Earth: 5mm
Switched	Yes
Double Pole	Yes
Twin Earth	Yes
Clean Earth	No
Neon	No
Warranty	10 Years Domestic

Standards	BS 1363
-----------	---------

Additional Information	Ensure that the mains supply is isolated before commencing installation and refer to the circuit diagram supplied with the relevant product. Bare earth cables must always be covered with appropriate sleeving and wired to the earth terminal.
------------------------	---

SPECIFICATION SHEET

Product Code

VP*551#

Description

13A Fused Connection Unit Switched With Flex Outlet 'Ingot'

Black Nickel Sockets to be mounted to Trunking and singular PVC back boxes where trunking isn't shown.

Image below is indicative only,



General Information	
Dimensions	88mm x 88mm x 8mm (Excluding Gasket)
Finishes Available	Replace * with: AB (Antique Brass), BN (Black Nickel), BR (Polished Brass), CH (Polished Chrome), PN (Pearl Nickel), SB (Satin Brass), SC (Satin Chrome), and SS (Stainless Steel).
Inserts Available	Replace # with: WH (White) and BK (Black). Black or White gasket supplied to match appropriate inserts. (Antique Brass and Black Nickel are only available with back inserts).
Material Composition	Rear Housing: Nylon Front Plate: Stainless Steel Terminals: Brass Earth Strap: Mild Steel Terminal Screws: Steel and Yellow Passivated Silver "on-lay" copper/brass contacts.
Back Box Depth	35mm – 47mm
Cable Size	4 x 2.5mm ²
Terminal Size	Live: 5mm Neutral: 5mm Earth: 5mm
Switched	Yes
Double Pole	Yes
Twin Earth	Yes
Flex Outlet	Yes
Neon	No
Warranty	10 Years Domestic
Standards	
BS 1363 BS 1362 (Fuse)	
Additional Information	
Ensure that the mains supply is isolated before commencing installation and refer to the circuit diagram supplied with the relevant product. Bare earth cables must always be covered with appropriate sleeving and wired to the earth terminal. Flex Outlet Diameter: 10mm	

SPECIFICATION SHEET

Product Code VP*751#

Description 13A Fused Connection Unit Switched 'Ingot'

Black Nickel Sockets to be mounted to Trunking and singular PVC back boxes where trunking isn't shown.

Image below is indicative only,



General Information	
Dimensions	88mm x 88mm x 8mm (Gasket Available)
Finishes Available	Replace * with: AB (Antique Brass), BN (Black Nickel), BR (Polished Brass), CH (Polished Chrome), PN (Pearl Nickel), SB (Satin Brass), SC (Satin Chrome), and SS (Stainless Steel).
Inserts Available	Replace # with: WH (White) and BK (Black). Black or White gasket supplied to match appropriate inserts. (Antique Brass and Black Nickel are only available with back inserts).
Material Composition	Rear Housing: Urea Front Plate: Stainless Steel Terminals: Brass Earth Strap: Mild Steel Terminal Screws: Steel and Yellow Passivated Silver "on-lay" copper/brass contacts.
Back Box Depth	35mm – 47mm
Cable Size	4 x 2.5mm ²
Terminal Size	Live: 5mm Neutral: 5mm Earth: 5mm
Switched	Yes
Double Pole	No
Twin Earth	Yes
Flex Outlet	No
Neon	No
Warranty	10 Years Domestic
Standards	
BS 1363 BS 1362 (Fuse)	
Additional Information	
Ensure that the mains supply is isolated before commencing installation and refer to the circuit diagram supplied with the relevant product. Bare earth cables must always be covered with appropriate sleeving and wired to the earth terminal.	

V1.0

SPECIFICATION SHEET

Product Code CL051

Description 13A DP Switched Fused Connection Unit

Ceiling Mounted Spurs



General Information	
Dimensions	80mm x 80mm x 45mm
Material composition	Rear Housing: Urea Front Plate and Back Box: Steel Terminals: Brass Earth Strap: Mild Steel Terminal Screws: Steel and Yellow Passivated Silver "on-lay" copper/brass contacts.
Back Box Depth	40mm
Cable Size	4 x 2.5mm ²
Terminal Size	Live: 5mm Neutral: 5mm Earth: 5mm Knockouts: 20mm
Switched	Yes
Double Pole	Yes
Twin Earth	Yes
Clean Earth	No
Neon	No
Flex Outlet	Yes
Warranty	10 Years Domestic

Standards	BS 1363 BS1362 (Fuse)
-----------	--------------------------

Additional Information	Ensure that the mains supply is isolated before commencing installation and refer to the circuit diagram supplied with the relevant product. Bare earth cables must always be covered with appropriate sleeving and wired to the earth terminal. Flex Outlet Diameter: 10mm
------------------------	---

White Plastic Accessories
for Behind Kitchen Units Only



Power Socket Outlets



The smooth modern lines of the MODE accessory plate will fit easily into traditional and contemporary designs alike.

All MODE 13A sockets are tested and approved to BS1363 offering assured quality and safety through our BSI Kitemark Licence KM10807.

13A UK Socket Outlets

Product Range

13A UK Socket Outlets

CMA030	13A 1 Gang Socket Outlet
CMA032	13A 1 Gang Socket Outlet (Twin Earth)
CMA035	13A 1 Gang DP Switched Socket Outlet
CMA036	13A 2 Gang DP Switched Socket Outlet (Twin Earth)
CMA037	13A 2 Gang DP Switched Socket Outlet (Twin Earth, Clean Earth)
CMA630	13A 1 Gang Socket Outlet (Twin Earth)
CMA635	13A 1 Gang DP Switched Socket Outlet (Twin Earth)

13A UK Socket Outlets (Outboard Rockers)

CMA836	13A 2 Gang DP OB Switched Socket Outlet (Twin Earth)
CMA840	13A 2 Gang DP OB Switched Socket Outlet & Neons (Twin Earth)

13A UK Socket Outlets (Red Rockers)

CMA035PWRD	13A 1 Gang DP Switched Socket Outlet (Twin Earth)
CMA836PWRD	13A 2 Gang DP Outboard Switched Socket Outlet (Twin Earth)

13A UK Locating Plug Socket Outlets

CMA735	13A 1 Gang DP Switched Locating Plug Socket Outlet
CMA736	13A 2 Gang DP Outboard Switched Locating Plug Socket Outlet (Twin Earth)

13A UK Socket Outlets



CMA030, CMA630



CMA035, CMA635



CMA035PWRD



CMA735



CMA032



CMA036, CMA037



CMA836PWRD



CMA736



CMA836



CMA840

Errors & Omissions excluded. Specification is subject to change without notice.

V1.0

Scolmore International Ltd, 1 Scolmore Park, Landsberg, Lichfield Road Ind. Estate, Tamworth, Staffordshire, B79 7XB

Telephone: 01827 63454

E-mail: sales@scolmore.com, technical@scolmore.com


Facsimile: 01827 63362

Website: www.scolmore.com


13A UK Socket Outlets

Product Dimensional Drawings (mm)


CMA032

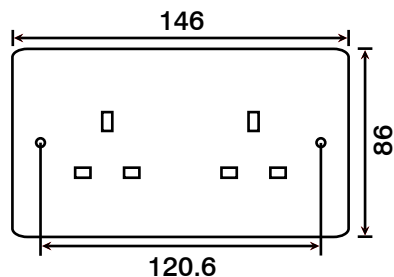


CMA036, 037

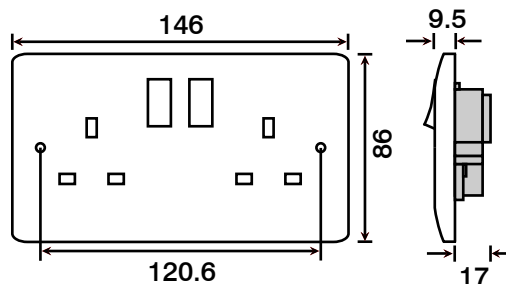


CMA030, 630

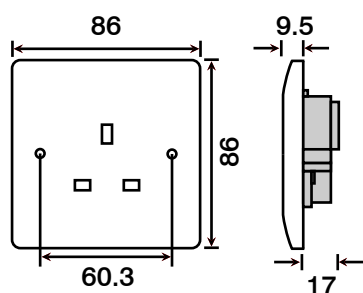


CMA035, 635, 735 035PWRD

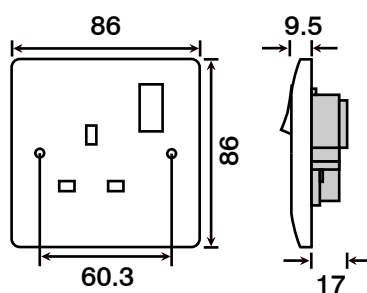

CMA736, 836, 840

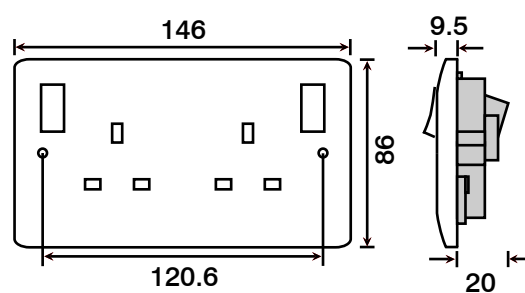

Product Wiring Diagram

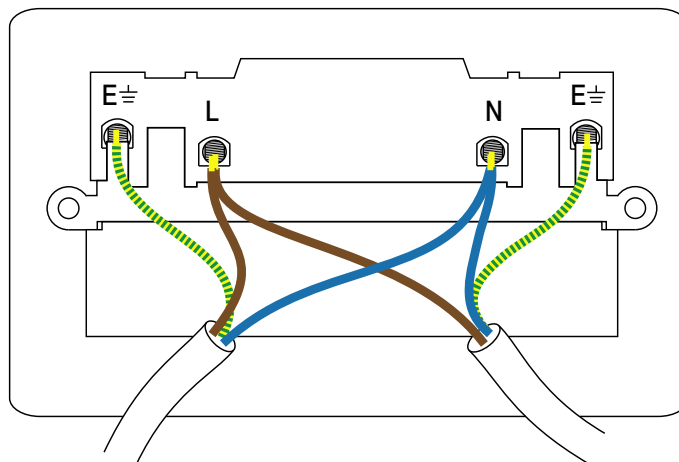

13A UK Socket Outlets**Technical Specification****13A UK Socket Outlets**

Material Composition	Front Plate, Rocker Switch & Rear Housing: Urea Terminals: Brass Terminal Screws: Steel & Yellow Passivated Internal Mechanism: Formed Press Brass Silver “on-lay” Copper / Brass Contacts
Voltage	240V~ 50Hz
Current Rating	13A
Terminal Size	5mm ø
Torque Value	2.5Nm
Cable Size	4 x 2.5mm ²
Back Box Depth	25mm - 47mm
Double Pole Switched	(035, 035PWRD, 036, 037, 635, 735, 736 836, 836PWRD 840)
Twin Earth	(036, 037, 630, 635, 736, 836, 836PWRD, 840)
Warranty	20 Years
Anti Microbial Certified	Yes
IP Rating	IP20
Operational Temperature	-5° to +40°C
Standards	KM10807 Kitemark Licence BS 1363-2:1995+A4:2012 Modified ISO 22196

Additional Information

Ensure that the mains supply is isolated before commencing installation and refer to the circuit diagram with the relevant product.

Bare earth cables must always be covered with appropriate sleeving and wired to the earth terminal.

All white moulded accessories are manufactured using Urea Formaldehyde, which has similar inherent properties to antimicrobial additives that inhibit the growth of infectious diseases. All products were independently tested and achieved a 99.9% kill rate across all four types of the strains of bacteria - MRSA, E-Coli, Salmonella, and Klebsiella Pneumoniae.

Errors & Omissions excluded. Specification is subject to change without notice.

V1.0

Scolmore International Ltd, 1 Scolmore Park, Landsberg, Lichfield Road Ind. Estate, Tamworth, Staffordshire, B79 7XB

Telephone: 01827 63454

E-mail: sales@scolmore.com, technical@scolmore.com

Facsimile: 01827 63362

Website: www.scolmore.com



DECLARATION OF CONFORMITY

1. *Issuer Name* Scolmore International Limited
2. *Issuer Address* 1 Scolmore Park, Landsberg,
Lichfield Road Industrial Estate,
Tamworth, Staffordshire, B79 7XB
3. *Object(s) of Declaration* Mode Range
 - a. *Group* Socket Outlets
 - b. *Model No.* CMA030, CMA032, CMA035, CMA036, CMA037, CMA630, CMA635,
CMA735, CMA736, CMA836, CMA840, CMA035PWRD, CMA836PWRD,
CMA935, CMA936
4. *The object of the declaration described above is in conformity with the requirements of the following Legislations:*
5. *All products contained within the aforementioned comply with the relevant standards and requirements listed below.*

BSI Kitemark Licence KM10807
BS 1363-2: 1995 + A4: 2012
6. *I hereby declare that the equipment named above has been designed to comply with the relevant sections of the above referenced specifications. The unit complies with all applicable Essential Requirements of the Directives.*

In conjunction with the above all manufacture and process controls are in accordance with ISO 9001:2008

Signed, for and on behalf of: Scolmore International Limited


Steven Bettson BSc - Senior Technical Support Engineer

C € 13

SPECIFICATION SHEET

Product Code MM480*

Description RJ45 Cat-5E Outlet Module

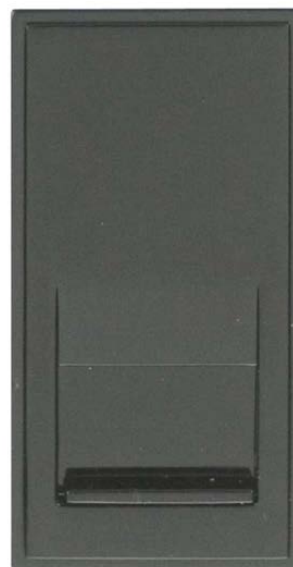

General Information	
Dimensions	25mm x 50mm
Finishes Available	Replace * with: WH (White), BK (Black)
Material Composition	Front Plate: Polycarbonate
Back Box Depth	35mm – 47mm
Operating frequency	100Mhz
Module Size	Single
Warranty	1 Year Domestic

Additional Information	Standard Euro Mod size. Ensure that the mains supply is isolated before commencing installation and refer to the circuit diagram supplied with the relevant product. Bare earth cables must always be covered with appropriate sleeving and wired to the earth terminal.
------------------------	--

RJ-45	T568B	10 Base -T	ISDN	BT 631A	UK Flat	Krone 237A	RJ-11	BT
1	W/Or	Tx+	Power	4 (3)	Green	4	5	(GND)
2	Or/W	Tx-	Power	3 (4)	Blue	3	2	Bell (1.8µF)
3	W/Gn	Rx+	Tx+	1 (6)	Orange	[5]	[1]	-
4	Bl/W	-	Rx+	5 (2)	White	2	4	B
5	W/Bl	-	Rx-	2 (5)	Red	1	3	A (1.8µF)
6	Gn/W	Rx-	Tx+	6 (1)	Black	[6]	[6]	-
7	W/Br	-	Power	-	-	-	-	-
8	Br/W	-	Power	-	-	-	-	-

V1.0