


© Copyright: All rights reserved. This drawing must not be reproduced without permission.
Do not scale from this drawing. All dimension are in millimetres unless otherwise stated.
Any discrepancies should be reported to the Architect.

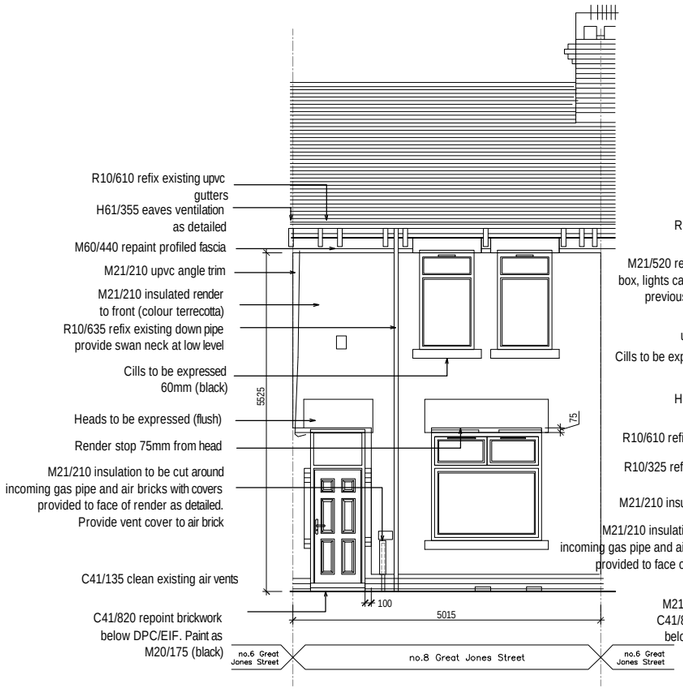


FRONT WALL ELEVATION (A)

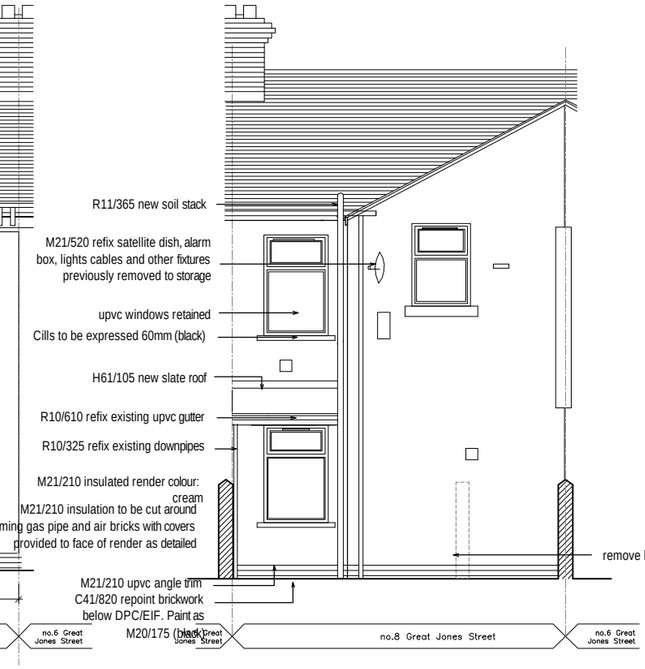


REAR WALL ELEVATION (B)

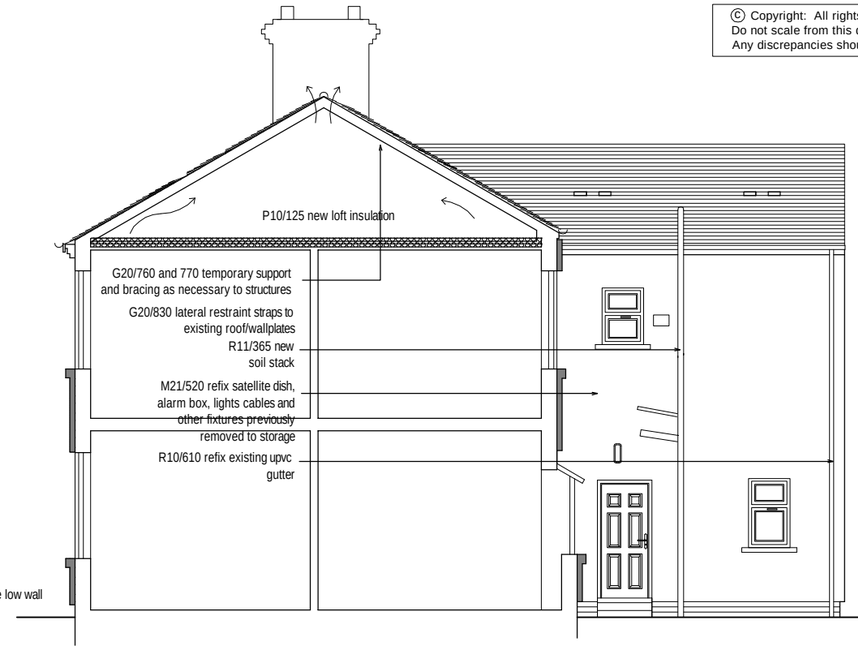


REAR WALL ELEVATION (C)



GROUND FLOOR PLAN



FIRST FLOOR PLAN



ROOF PLAN

GENERAL NOTES

All work is to be in accordance with Current Building Regulations, relevant British Standards, Codes of Practice and to the approval of the Local Authority.

Figured dimensions are to take preference over those scaled. All dimensions are to be checked on site prior to commencement of work on site.

The Contractor shall be responsible for checking all component references and sizes prior to ordering materials. The manufacturers recommendations with regards to handling, storage, and installation must be strictly adhered to.

The requirements of the Construction (Design and Management) Regulations 1994 will apply to this contract.

The contractor is to visit all properties during the tender process to ascertain the extent of works as described in the tender documents.

CONSTRUCTION NOTES

Previous Works:
The property has been subject to a previous refurbishment contract which included but was not limited to the following:
- Replacement PVC-U doors and windows
- Replacement of soil, waste and rainwater goods to front and rear.
- Provision of new kitchen and bathroom
- Construction of a new single storey kitchen extension to the rear of the property.

Proposed Works:
In general terms, and subject to the full investigation, the works carried out under this contract shall include but not may be limited to the undernoted:

Demolition/Strip Out:
Generally the following works are to be undertaken in as NBS C20:
- Carefully remove, refurbish and store for re-use all existing PVC-U rainwater goods throughout.
- Remove and dispose of existing PVC-U soil and waste goods to rear.
- Remove and dispose of all timber fascias and barge boards.
- Carefully remove all external lights, satellite dishes wall brackets etc and store for re-fixing.
- Carefully remove and dispose of all coverings to main and ancillary roofs.

Damp Proof Course:
Undertake special investigation as NBS C11 to determine extent of any dpc and associated works.
- Installation of dpc shall be in accordance with NBS C45
- Replastering to affected areas as NBS N20

External Wall:
Works to front and rear solid walls shall include the following:
- Repairs and removal of fittings as NBS C41
-Repointing below DPC/EIF level as NBS C41
- Cleaning all existing air bricks as NBS C41
- Installation of EIF system as NBS M21
- Painting exposed brickwork below DPC/EIF level as NBS M60

Windows/ Doors
-Retain existing UPVC windows.

Roof:
- Repairs to roof timbers deemed necessary following survey as NBS C51and C52
- Remedial works to roof as NBS G20
-Replacement of timber fascias with PVC-U items as NBS G20
- Installation of eaves and ridge ventilation to main roof as NBS H61
- Installation of ventilator tiles to ancillary roof as NBS H61
- Replacement of coverings to all roof including rear bay window as NBS H61
- Replacement of valley gutters as NBS H61
- Replacement of lead flashings as NBS H71

Chimneys:
- Repointing and re-flaunching shared chimney stacks to client side as NBS C41
- Provision of new new flashings as NBS H71
- Rebedding existing chimney pots/terminals as F30

Loft Insulation:
- Installation of thermal insulation to the main and ancillary roof spaces as NBS P10

Drainage:
- Refix existing (previously removed) rainwater goods as NBS R10
- Replace soil and waste goods to rear of property as NBS R11
- Amend existing below ground drainage to suit new SVP position as NBS R12

Kitchen:
Not applicable unless dpc works are required. In which case the base units and worktops must be carefully removed, stored and refixed

Bathroom:
Not applicable

CONSTRUCTION NOTES

Previous Works:
The property has been subject to a previous refurbishment contract which included but was not limited to the following:
- Replacement PVC-U doors and windows
- Replacement of soil, waste and rainwater goods to front and rear.
- Provision of new kitchen and bathroom

Proposed Works:
In general terms, and subject to the full investigation, the works carried out under this contract shall include but not may be limited to the undernoted:

Demolition/Strip Out:
Generally the following works are to be undertaken in as NBS C20:

Damp Proof Course:
No issues reported. Extent of any dpc and associated works to be determined on site as NBS C11.
- Installation of DPC shall be in accordance with NBS C45
- Replastering to affected areas as NBS N20

External Wall:
Works to front and rear solid walls shall include the following:

Windows/ Doors
-Retain existing UPVC windows.

Roof:

Chimneys:

Revision	Description	Date	Drawn	Checked
A	Issued for Planning	21.11.12	SK	DW
	PLANNING			
-	First Issue for Comment / Approval	14/09/12		DW
	PRELIMINARY ISSUE			

Halliday Meecham Architects Limited
111 Piccadilly, Manchester M1 2HY
t: +44 (0)161 661 5566
f: +44 (0)161 661 5567
e: hma@hallidaymeecham.com
w: www.hallidaymeecham.com

architecture
interior design
space planning
urban planning
project management
planning supervisors

Halliday Meecham

Client:	EASTLANDS HOMES
Project:	Eastlands Homes Miscellaneous Properties
Phase / Location:	External refurbishment
Drawing:	8 Great Jones Street, M12 5NX As Proposed

Scale @ A1	Scale @ A3	Date:	Drawn:	Checked:	Job No.	Drawing No.	Revision
1:50	1:100	24.8.12	SK	DW	4398	(2-) 150	A