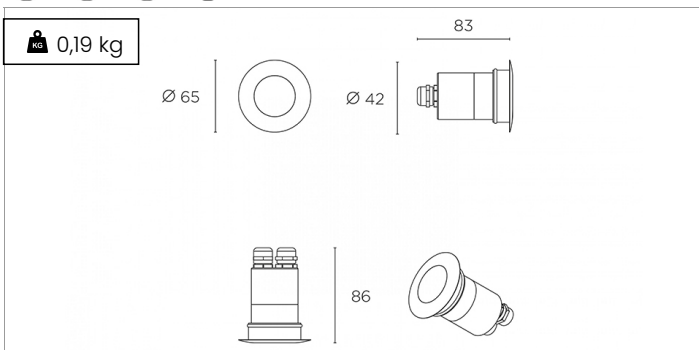


Project Name
Product Code 840781RAB2V+9D48V030AL + 8407900052 + 9G065


Product Description

Compact round LED inground luminaire for loop-in / loop-out installations with a diameter of 65mm and a recess depth of 86mm. Stainless steel housing. Available in 2700K, 3000K and 4000K in CRI85. Nominal power consumption of 4W (410lm). Lumen maintenance of 50,000 hrs at L80 B10. Available with four optics choices including Narrow flood (8°), Medium (25°), Wide (30°) and Ellipse (12°x34°). Luminaire to be installed with a blackout accessory (to be ordered separately). Suitable for walk over installations and drive over installations with a max. weight of 1000kg. Ingress protection of IP68. Class III luminaire to be used with remote On/Off power supply (24V).

Electrical characteristics

Isolation class	Class III
Power	4W CV (24V/48V)
Control	Remote driver
Power supply	Control: ON-OFF, Power: 29W, Sizes: LxPxh : 38x125x23

Mechanical features

Incandescent wire	850°
Protection class	IK10, IP68
Finish	Stainless steel
Driver protection degree	IP20

Lighting characteristics

CRI-CCT	CRI85 2700K
Optic	Narrow Flood 8°

Accessories

Independent accessories	Formwork
	+, Loop in/out

Connectors Connector 3x1mmq - 2 outputs IP68

Warranty

Lifetime L80B10 50.000 h


Certification CE Compliance

Warranty 5 years


Operating temperature -10° / +30°

Configurator code

Housing body	TRIM
Power	4W CV (24V/48V)
Control	Remote driver
Finish	Stainless steel
CRI-CCT	CRI85 2700K
Optic	Narrow Flood 8°
Driver protection degree	IP20
Power supply	Control: ON-OFF, Power: 29W, Sizes: LxPxh : 38x125x23
Independent accessories	Formwork
Connectors	Connector 3x1mmq - 2 outputs IP68

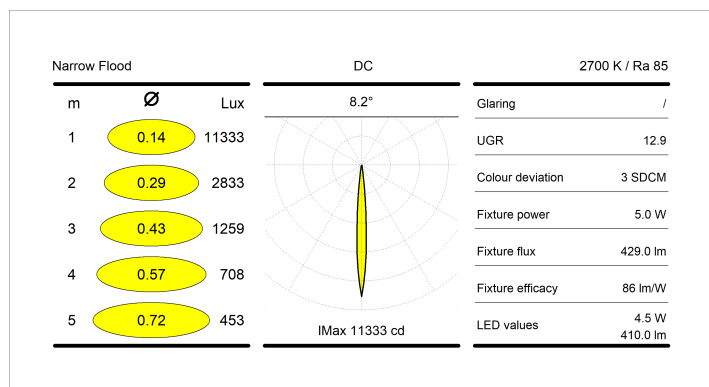

Accessories

Independent accessories



Formwork

Connectors



**Connector 3x1mmq -
2 outputs IP68**
