



NICHOLAS
REDICAN

LIGHTING DESIGNER

Linkedin/in/nicholasredican
design@NR-Lighting.com
07389 069 137




SIX TWELVE

Rev 3

Dimming options including Day & Night scenes to be implemented





Images

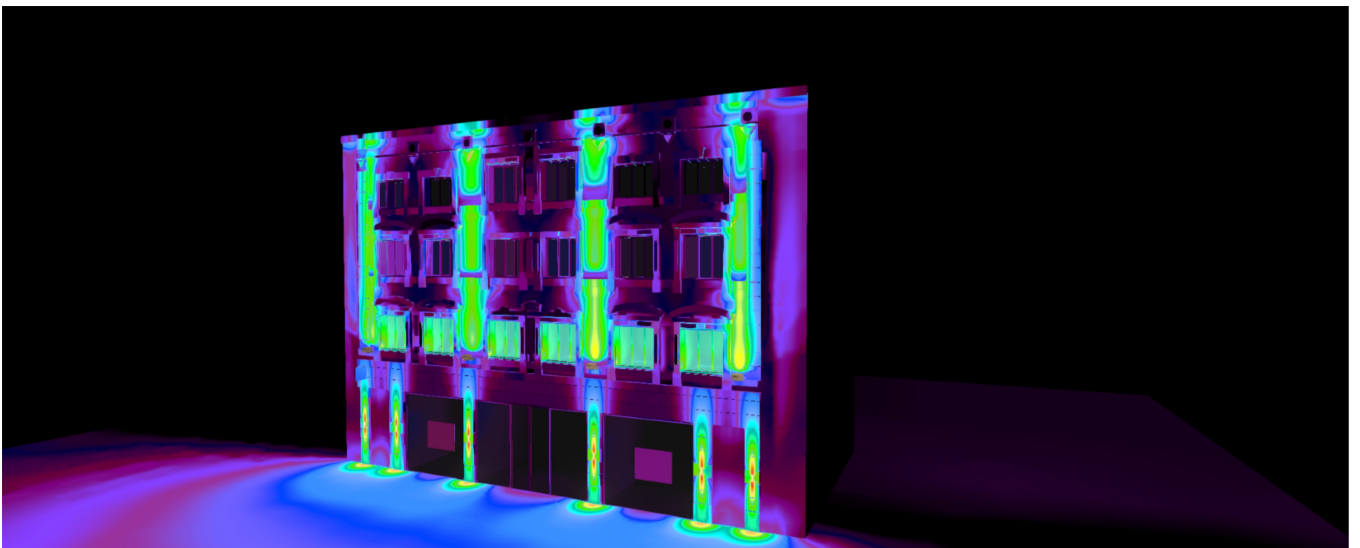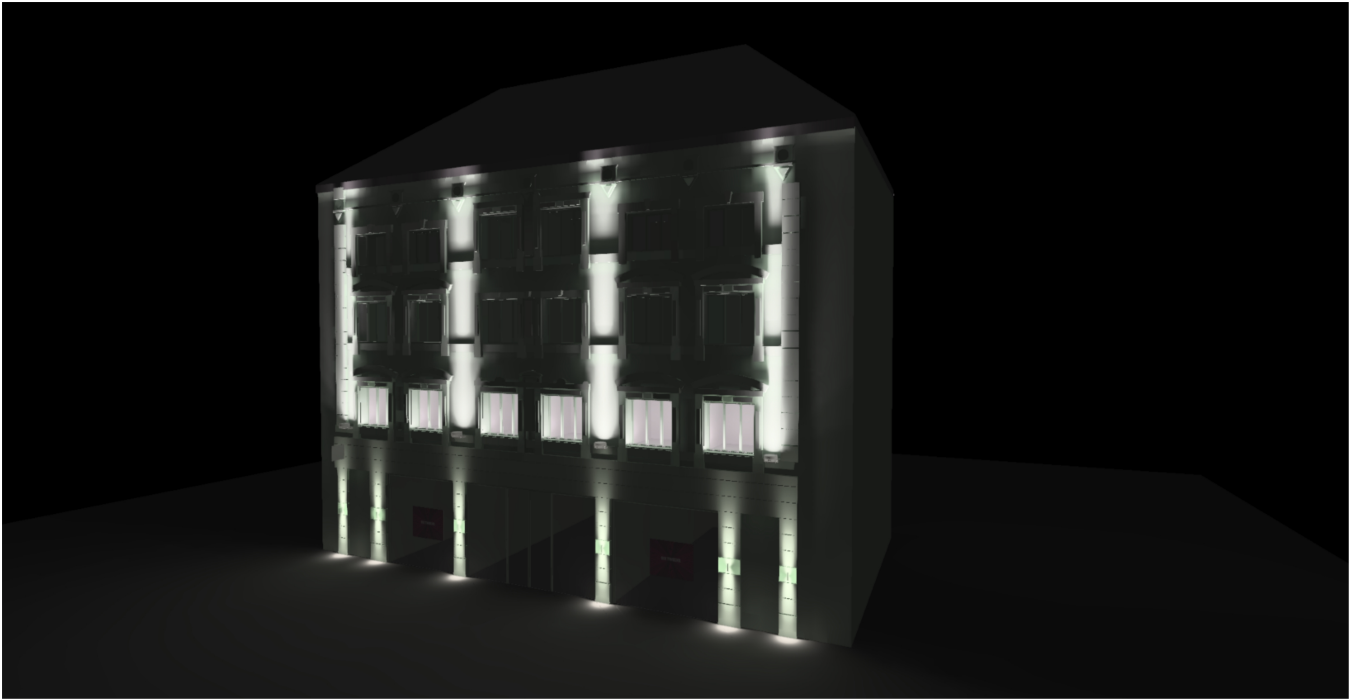




Images

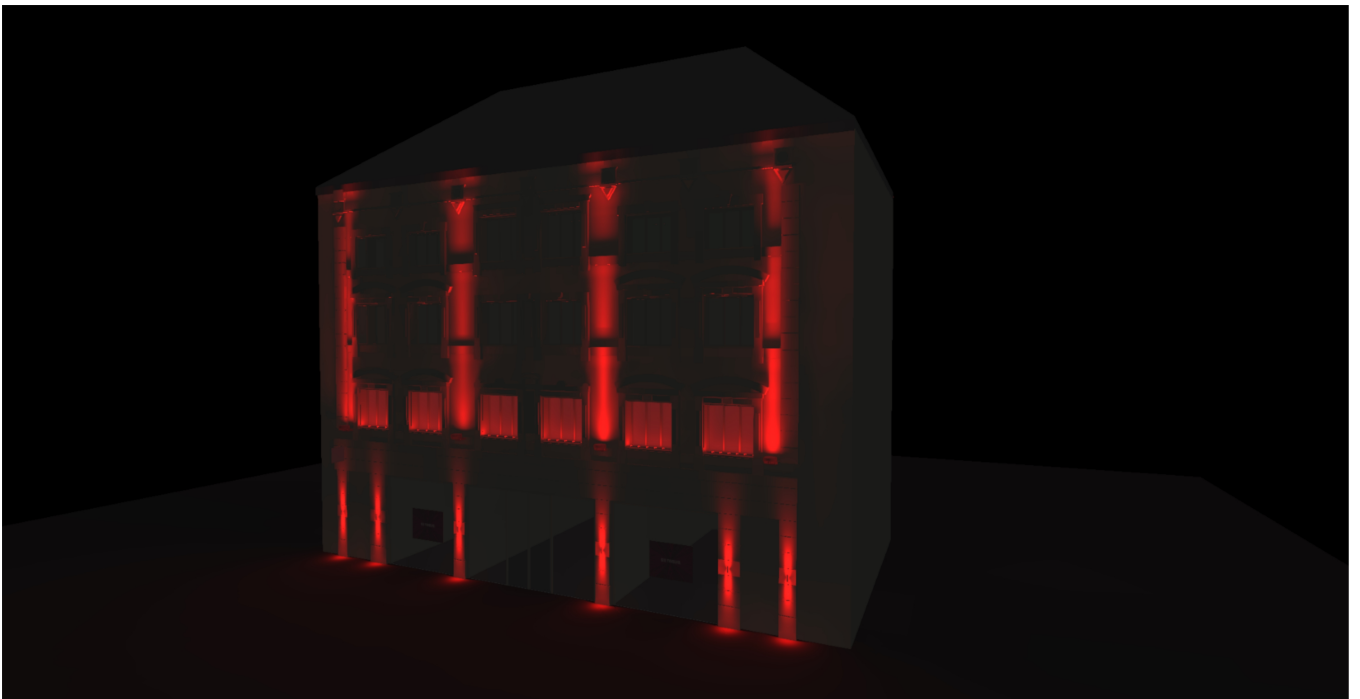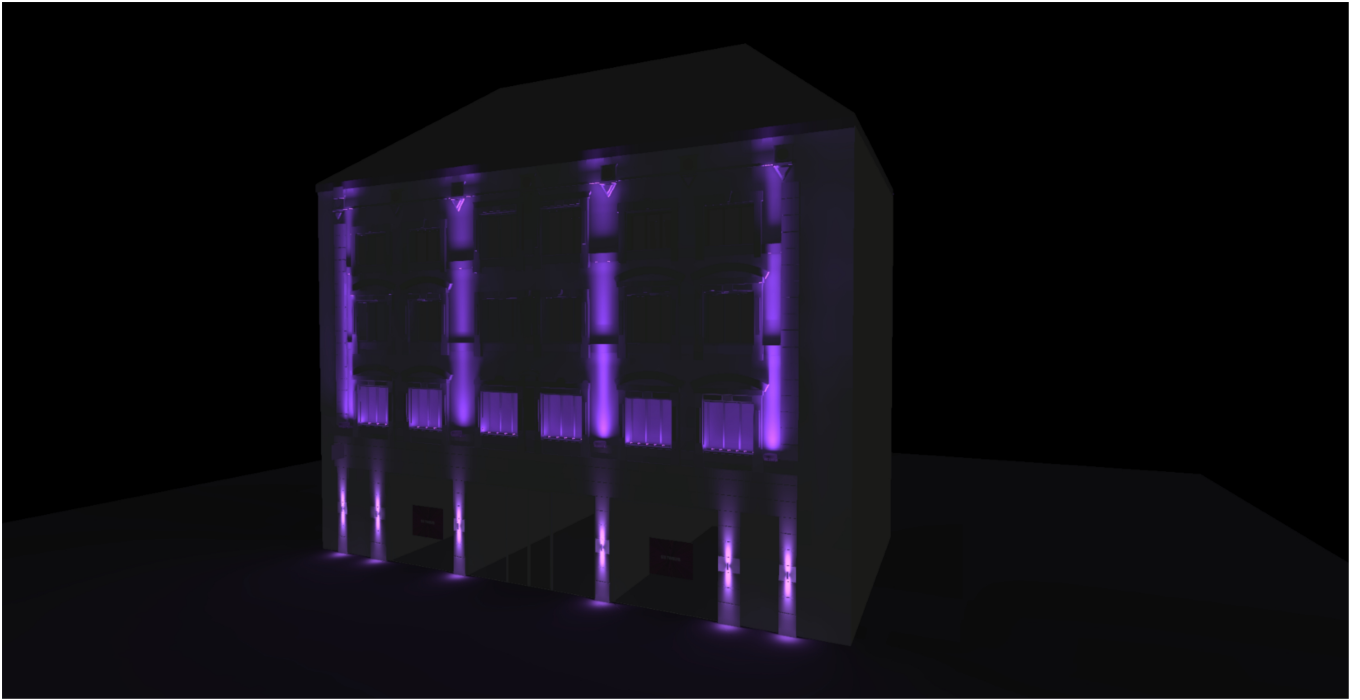



Images

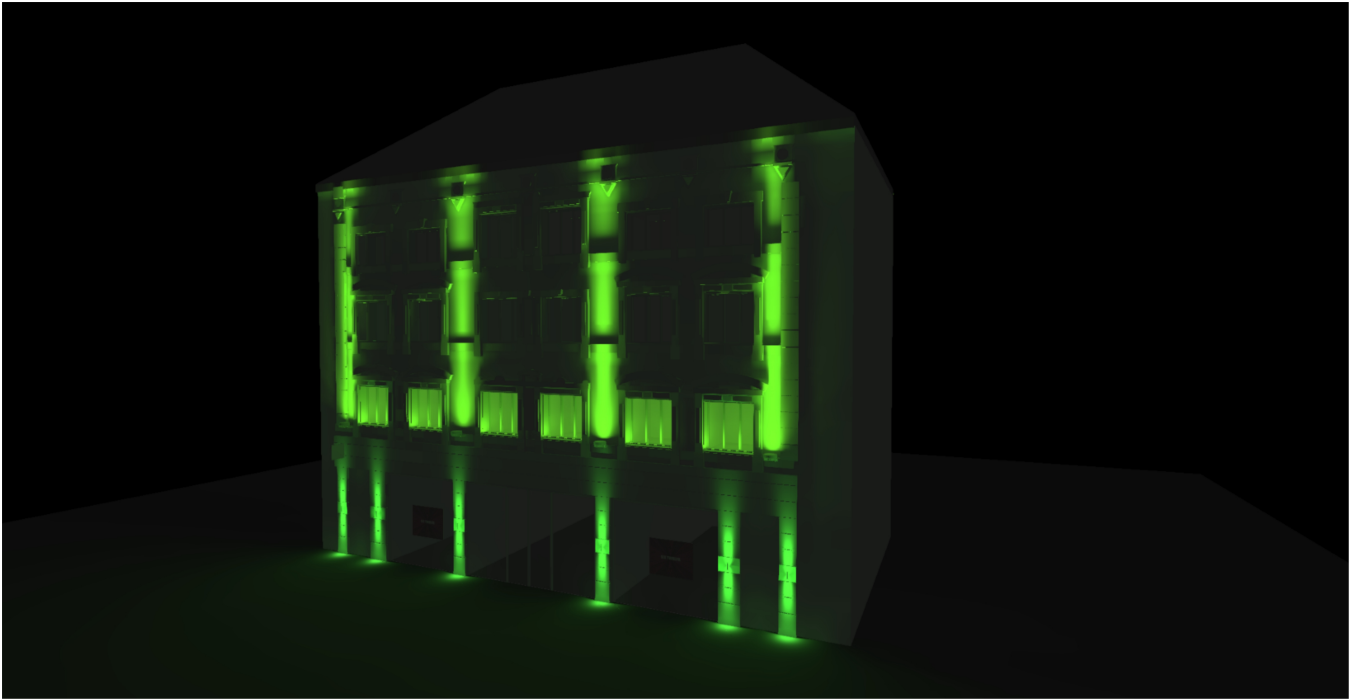




Product data sheet

LED Linear - XOOLINE HYDRA HD25 W840 OR-C004 IP67 1255



Article No.	W840
P	31.3 W
Φ_{Lamp}	1698 lm
$\Phi_{\text{Luminaire}}$	1704 lm
η	100.33 %
Luminous efficacy	54.5 lm/W
CCT	3991 K
CRI	84

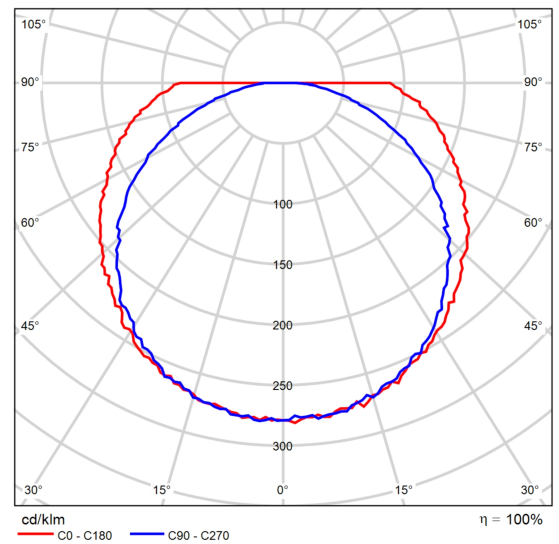


Polar LDC




Product data sheet

Reggiani Spa Illuminazione - Yori 60 IP66 WALL 8+8W 4000K CRI90 FS 17+17D



Article No. Yori 60 IP66 WALL
8+8W 4000K CRI90
FS 17+17D

P	16.0 W
Φ_{Lamp}	1222 lm
$\Phi_{\text{Luminaire}}$	1220 lm
η	99.80 %
Luminous efficacy	76.2 lm/W
CCT	4000 K
CRI	93

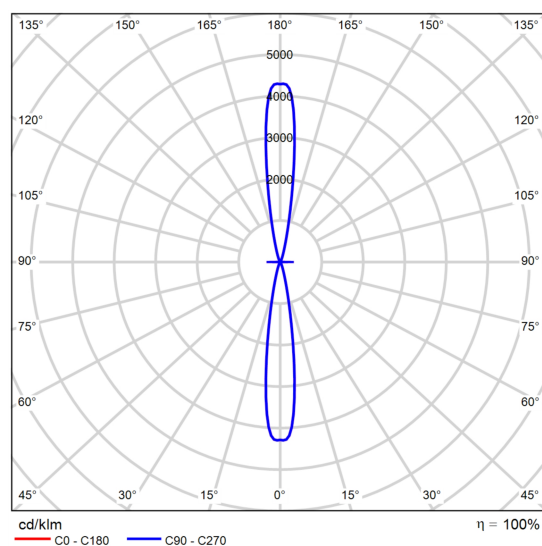

Polar LDC




Product data sheet

WE-EF - FLC240-CC [EES] IP66:LED-4x12/84W/RGBW/4K



Article No.	139-2424
P	94.0 W
Φ_{Lamp}	5040 lm
$\Phi_{\text{Luminaire}}$	4300 lm
η	85.31 %
Luminous efficacy	45.7 lm/W
CCT	3991 K
CRI	84

RGBW/RGBA Colour Changer. IP66, Class I. IK07. Marine-grade, die-cast aluminium alloy. 5CE superior corrosion protection including PCS hardware. Silicone CCG® Controlled Compression Gasket. Safety glass lens. One cable gland. Second gland for through wiring on request. Integral EC electronic converter, thermally separated. CAD-optimised optics for superior illumination and glare control. OLC® One LED Concept. Factory installed LED circuit board. DMX interface. M20 cable gland for network- and DMX-connection, WE-EF recommend a multi core cable for DMX & Power "Power PUR-SR 3x1,5 + DMX".

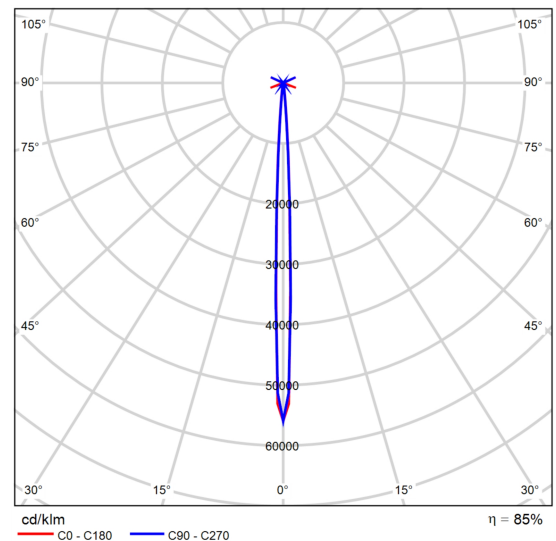

Polar LDC



Site 1

Luminaire list

 Φ_{total}

24520 lm

 P_{total}

472.0 W

Luminous efficacy

51.9 lm/W

pcs.	Manufacturer	Article No.	Article name	P	Φ	Luminous efficacy
6	Reggiani Spa Illuminazione	Yori 60 IP66 WALL 8+8W 4000K CRI90 FS 17+17D	Yori 60 IP66 WALL 8+8W 4000K CRI90 FS 17+17D	16.0 W	1220 lm	76.2 lm/W
4	WE-EF	139-2424	FLC240-CC [EES] IP66:LED-4x12/84W/RGBW/4K	94.0 W	4300 lm	45.7 lm/W



Building 1

Luminaire list

Φ_{total} 10224 lm	P_{total} 187.8 W	Luminous efficacy 54.4 lm/W
-----------------------------------	-------------------------------	--------------------------------

pcs.	Manufacturer	Article No.	Article name	P	Φ	Luminous efficacy
6	LED Linear	W840	XOOLINE HYDRA HD25 W840 OR-C004 IP67 1255	31.3 W	1704 lm	54.5 lm/W



Building 1 · Storey 1

Luminaire list

 Φ_{total}

10224 lm

 P_{total}

187.8 W



Luminous efficacy

54.4 lm/W

pcs.	Manufacturer	Article No.	Article name	P	Φ	Luminous efficacy
6	LED Linear	W840	XOOLINE HYDRA HD25 W840 OR-C004 IP67 1255	31.3 W	1704 lm	54.5 lm/W



Building 1 · Storey 1 (Light scene 1)
Surface result object 1 (Wall)

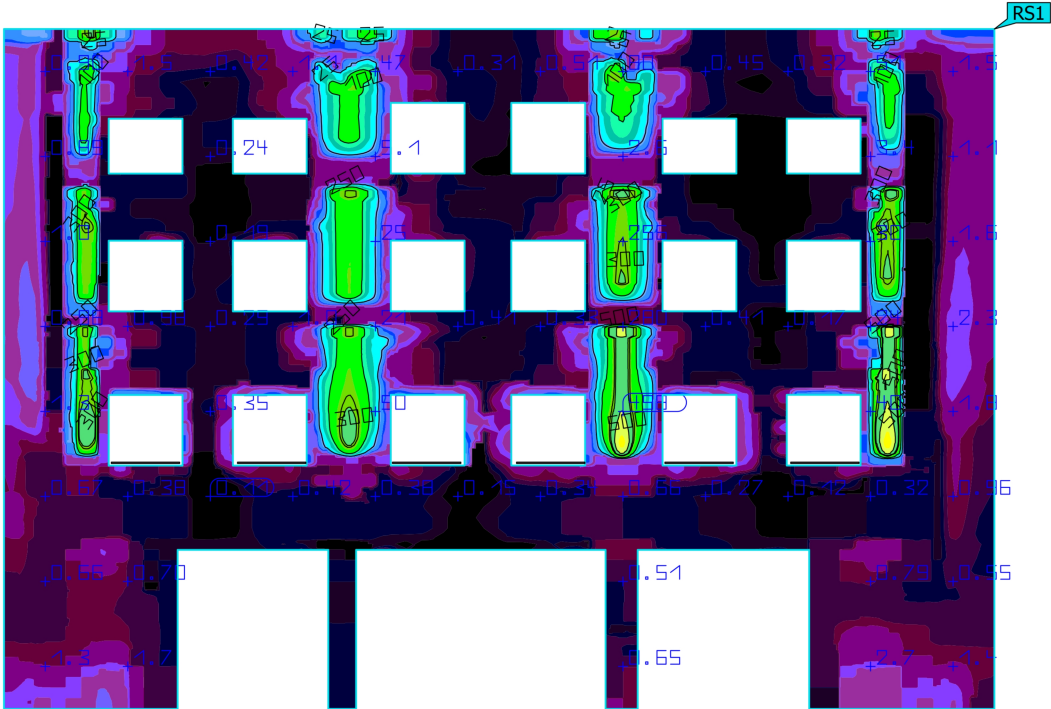

Properties	$\bar{E}$	$E_{\min}$	$E_{\max}$	$U_o (g_1)$	g_2	Index
Surface result object 1 (Wall) Perpendicular illuminance (adaptive) Height: 2.723 m	18.2 lx	0.047 lx	877 lx	0.003	0.000	RS1