

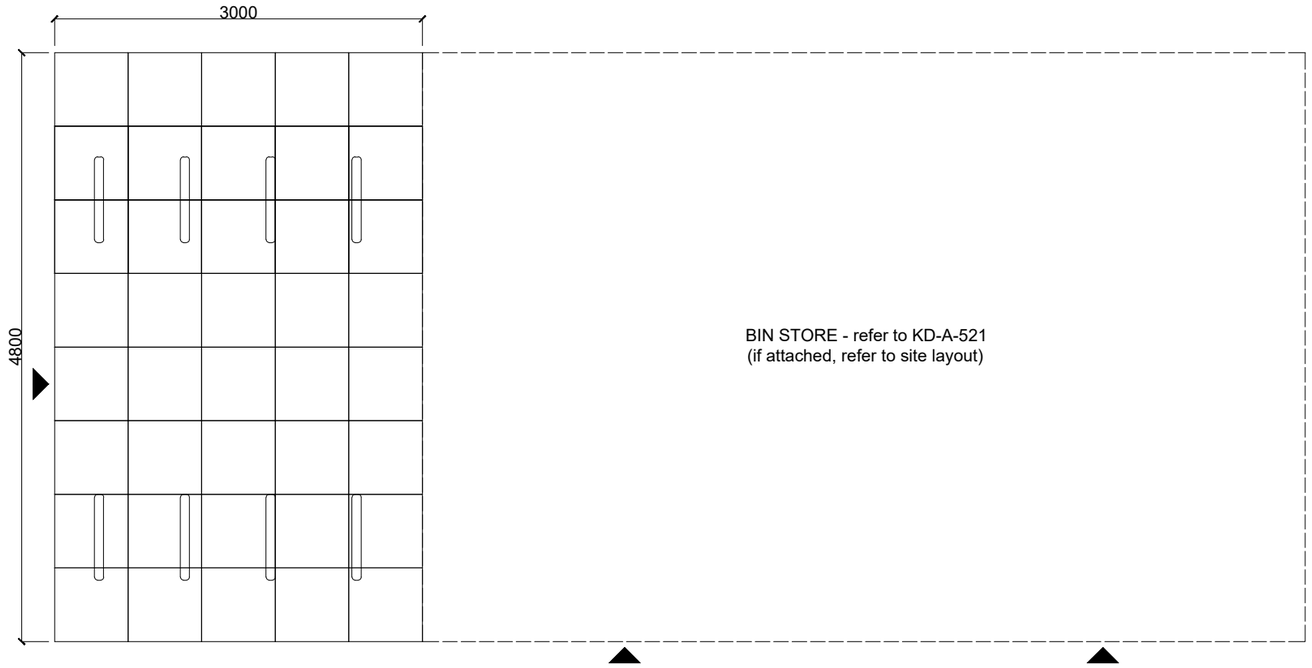


CYCLE STORE PLAN


CYCLE STORE SPECIFICATIONS	
Floor:	600x600 grey concrete flags
Structure:	100x100mm treated timber posts set in concrete
Rails:	75x50mm treated timber rails screw fixed to structural posts
Panels:	125x15mm treated timber panels screw fixed to rails leaving 25mm gap between panels
Gate:	Treated timber closed panel
Ironmongery:	Ironmongery 3x galvanised gate hinges, key-pad access lock/latch
Roof:	225x50mm roof purlins strapped down to vertical posts. Roof covering shall be clear heavy duty corrugated PVC roof sheets screw fixed to purlins
Rainwater goods:	Half round UPVC black gutter srew fixed to end purlin. Round UPVC rain water pipe fixed to corner structural post and drained to water butt

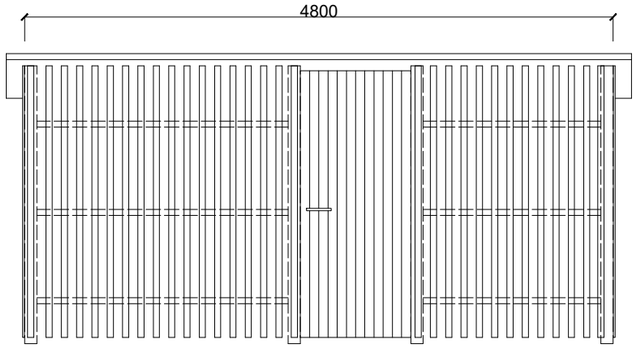


Front Elevation

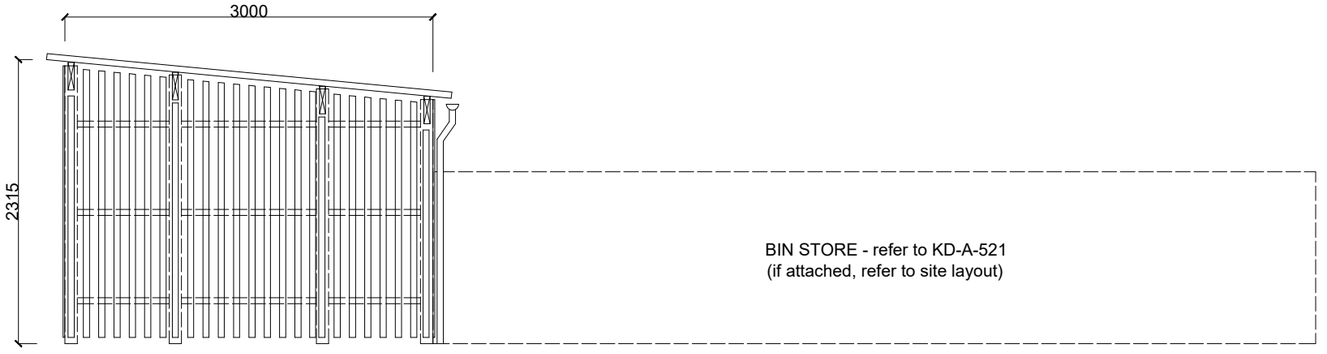

Side Elevation

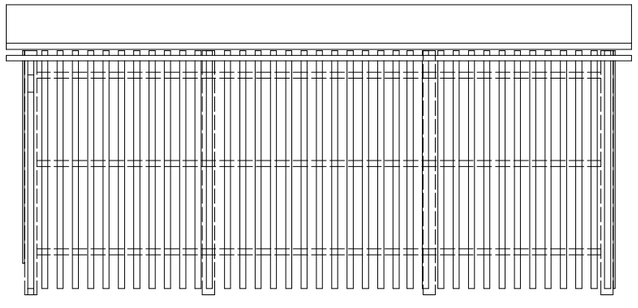

Rear Elevation

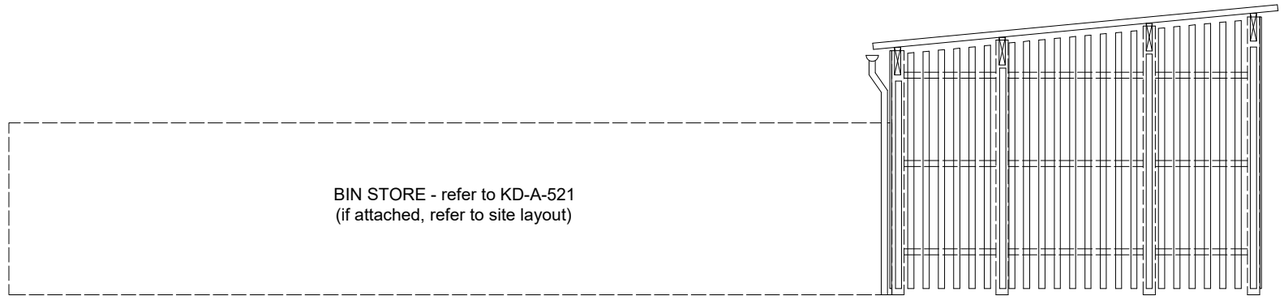

Side Elevation

Revision	Date	Amendment	Initials
-	-	-	-

Drawing Title	Typical Cycle Store		
Drawing Number	**KD-A-520**		
Revision	-	Scale @ A3	1:50
Drawn By	EK	Date Started	02.09.22
Checked by	RC	Date Checked	02.09.22

1st Floor, 103 Dalton Avenue, Birchwood Park,
Warrington WA3 6YE
T: 01925 363108 W: www.kellenhomes.com

KELLEN HOMES

z:\architectural general folder___kellen range\standard details\kd-a-520 typical cycle store.dwg