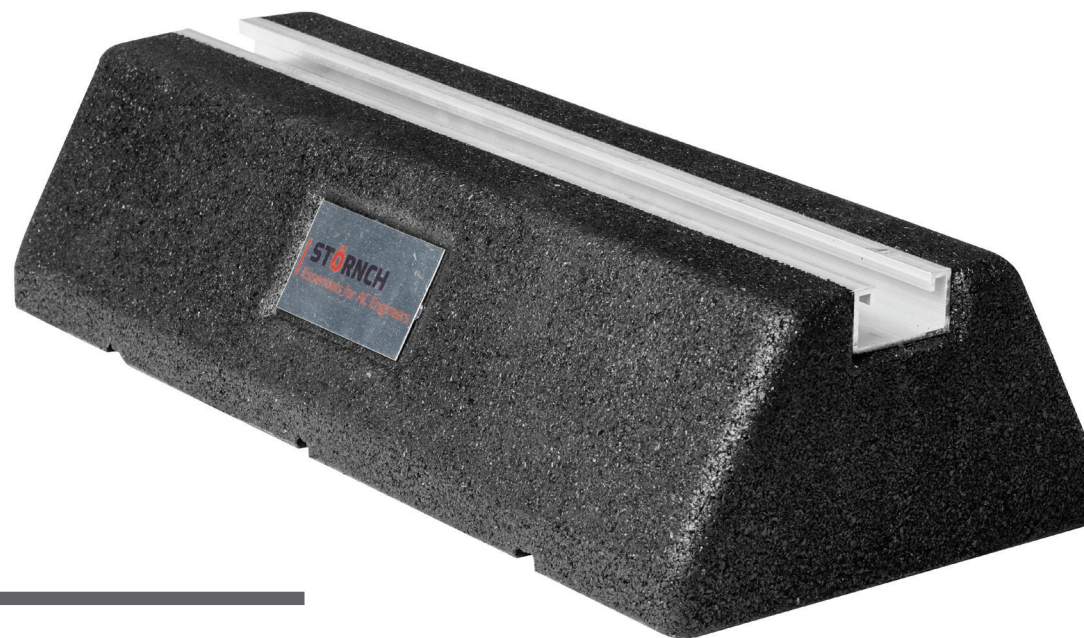




Rubber Support Feet

PRODUCT CODE(S)

GMCG20/21/22/23

STÖRNCH Rubber Support Feet are a neat and tidy nonpenetrative roof top support solution. The feet have 40mm x 20mm aluminium channel recessed into the top face to allow for easy fixing of services. Suitable for pipework, duct and cable tray runs. The Rubber Support Feet are made of durable, recycled rubber, which offers built-in anti-vibration and makes it both economical and environmentally responsible.



Code	GMCG20	GMCG21	GMCG22	GMCG23
Name	Small Rubber Support Foot	Medium Rubber Support Foot	Large Rubber Support Foot	X-Large Rubber Support Foot
Size	250mm (10")	400mm (16")	600mm (24")	1000mm (39")
Dimensions	250 x 180 x 95mm	400 x 180 x 95mm	600 x 180 x 95mm	1000 x 180 x 95mm
Max load/foot	80kg	125kg	220kg	290kg
Weight	2.5kgs (+/-0.5kgs)	4kgs (+/-0.5kgs)	6kgs (+/-0.5kgs)	10kgs (+/-0.5kgs)
Image				

SPECIFICATION

- UV stabilised, durable recycled rubber
- Built-in anti-vibration
- Corrosion resistant aluminium channel
- Compatible with industry standard components
- Rubber: recycled tyre rubber
- Aluminum channel: 6063

WORKING CONDITIONS

Suitable for internal or external applications in temperatures between -40°C to +80°C .

WARRANTY

12 month warranty.