
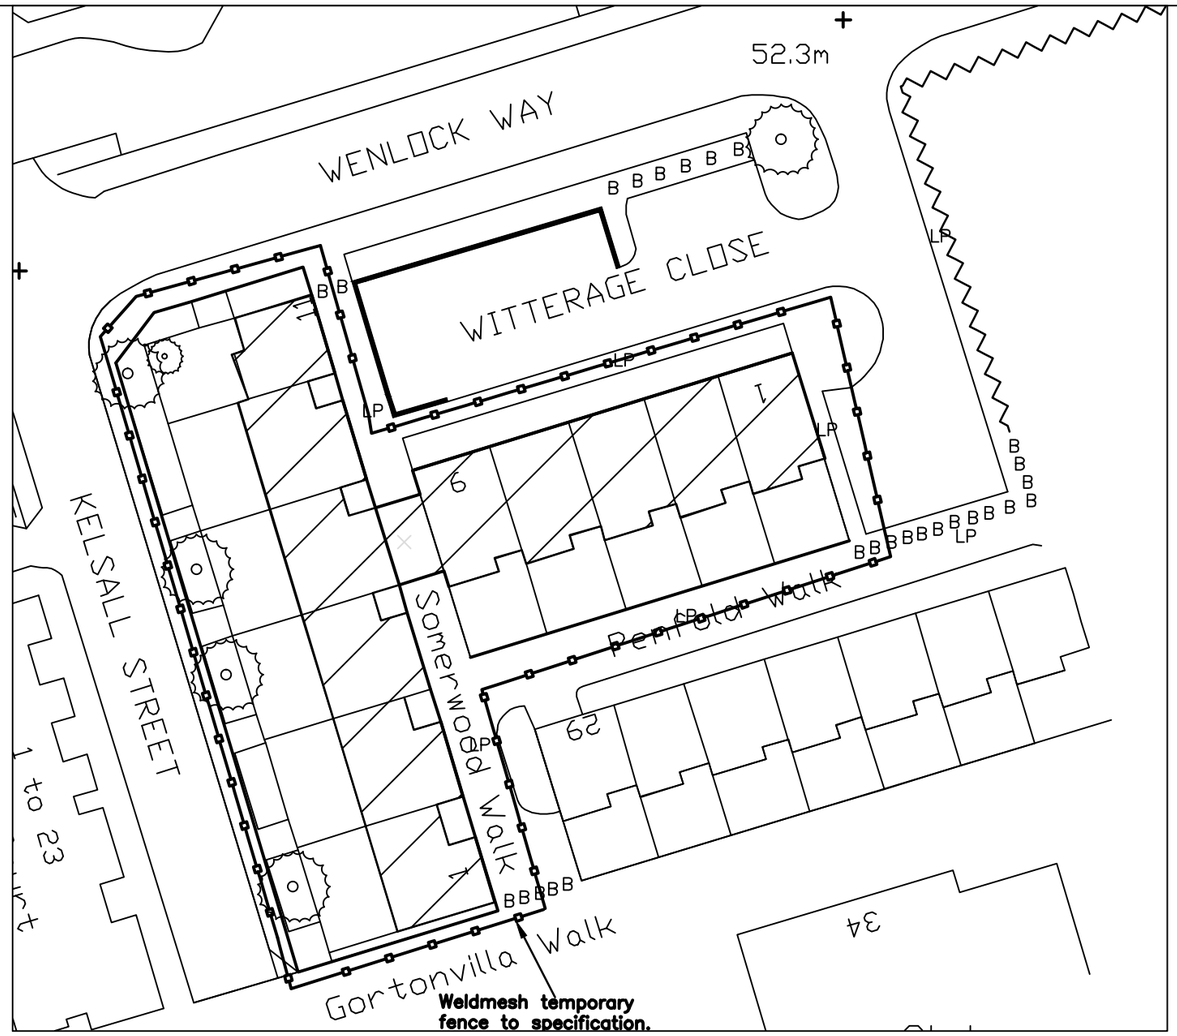


Block 16A, 16B & 12 B- Existing

This drawing has been reproduced from the Ordnance Survey mapping with the permission of The Controller of Her Majesty's Stationery Office Crown copyright. Unauthorised reproduction infringes Crown copyright and may lead to prosecution or civil proceedings.

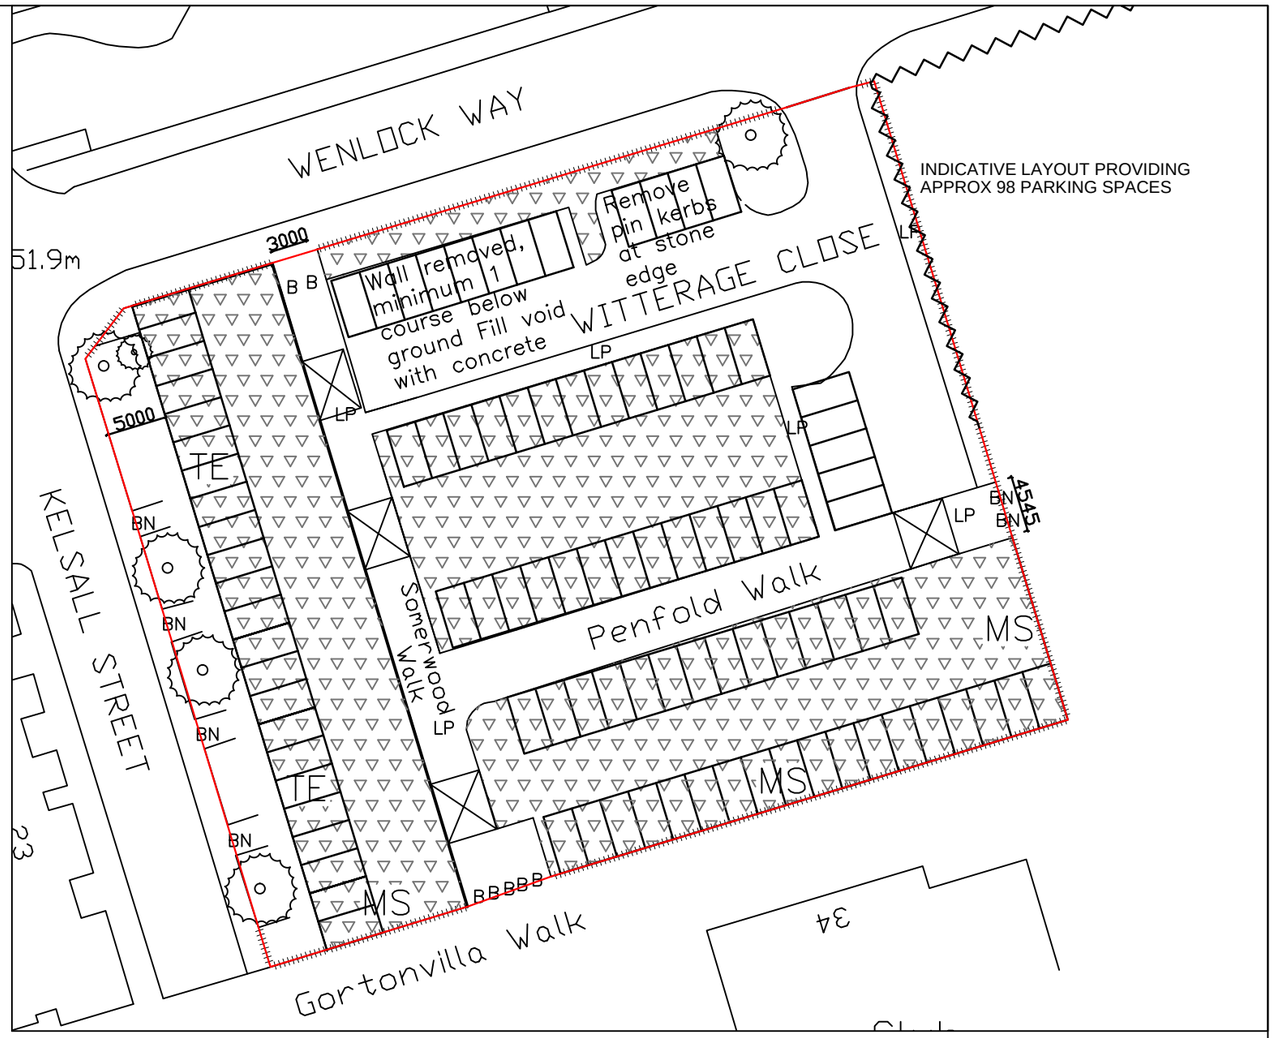

Block 16A, 16B & 12B - Proposed

B	Bollard (existing)
BN	Bollard (New)
MS	'Mowing' Strip 325mm x 150 mm
TE	Timber Edging to support stone edge

Timber knee rail. No pin kerb, no mowing strip unless indicated as above.

Knee rail already erected as part of main works

210mm of compacted MoT Type 1 stone with fines finish

Footpath protection. C30 concrete 200mm thick, reinforced top and bottom with A252 mesh. 5.0m wide, length to match path width.

Rev	Description	Date	by	chkd
D	Former 1-9 Witterage Close : west crossing centralised, east crossing omitted & knee-rail added .	12/12/13	PR	
C	Amended to include Block 12 B and preparation for possible temporary car park .	09/12/13	PR	
B	Line of knee rail moved along Kelsall Street to outside of the existing trees and note added re: knee rail.	23/9/13	ML	
A	Scale changed.	02/07/12	ML	

MANCHESTER CITY COUNCIL
Corporate Technical Services Group
4th floor Heron House
47 Lloyd St
Manchester
M2 5LE

JOB TITLE: WEST GORTON BUILDING RECYCLING

DRAWING TITLE: BLOCK 16A and 16B

COMPUTER FILE	DATE	SCALE	DRAWN	CHECKED
	Feb. 12	1:500@A3	ML	

JOB NO.	DRAWING NO.	REVISION
PY/40036	99/116	D