Technical Specification

Control Point	Head (m)	Flow (l/s)
Primary Design	0.700	6.800
Flush-Flo™	0.225	6.789
Kick-Flo®	0.496	5.794
Mean Flow		5.744


Hydro-Brake® Optimum Flow Control including:


- 3 mm grade 304L stainless steel
- Integral stainless steel pivoting by-pass door allowing clear line of sight through to outlet, c/w stainless steel operating rope
- Beed blasted finish to maximise corrosion resistance
- Stainless steel fixings
- Rubber gasket to seal outlet
- Indicative Weight: 10 kg


BBA APPROVAL INSPECTION TESTING CERTIFICATION CERTIFICATE 08/4596

wrc approved PT/503/0422 Valid: 01/04/2022 - 31/03/2027


hydro-int.com/patents

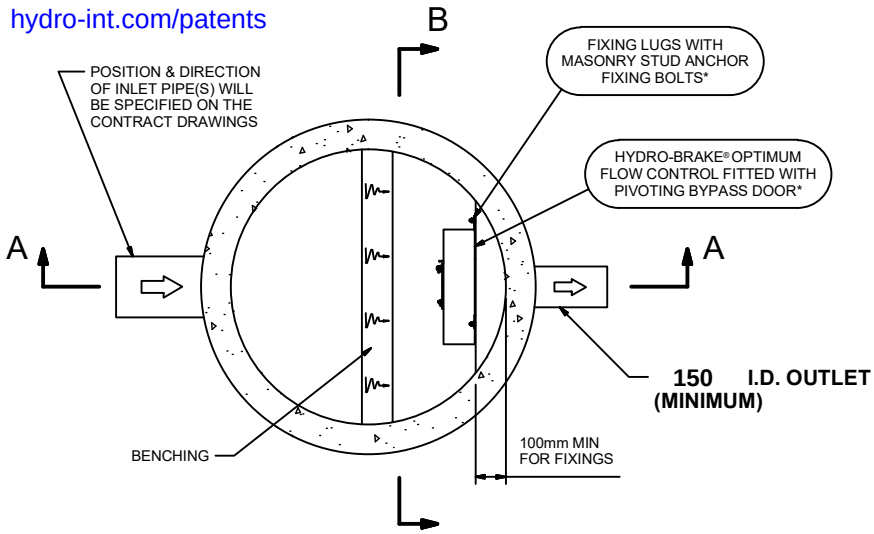



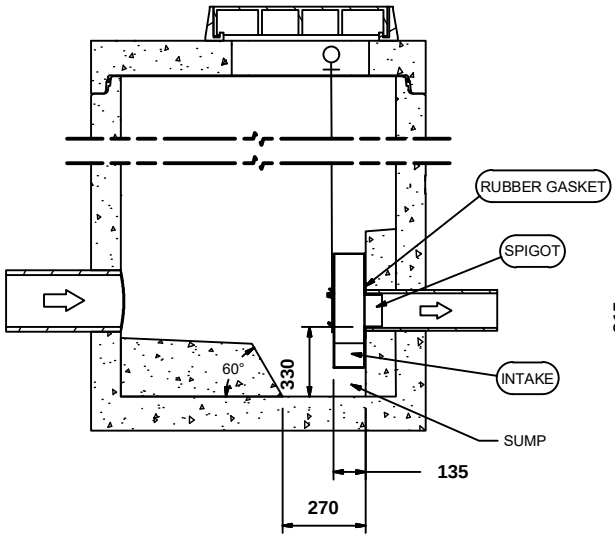

SECTION A-A

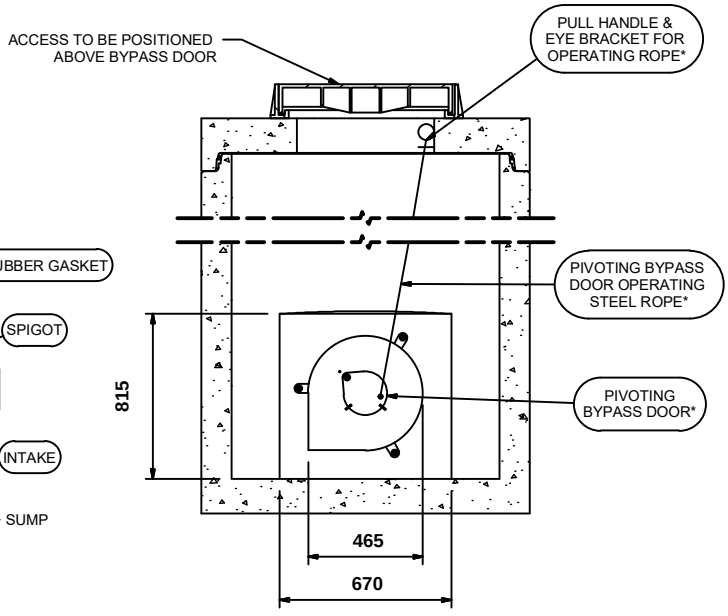

SECTION B-B

IMPORTANT: ⬭ LIMIT OF HYDRO INTERNATIONAL SUPPLY
THE DEVICE WILL BE HANDED TO SUIT SITE CONDITIONS
FOR SITE SPECIFIC DETAILS AND MINIMUM CHAMBER SIZE REFER TO HYDRO INTERNATIONAL
ALL CIVIL AND INSTALLATION WORK BY OTHERS
* WHERE SUPPLIED
HYDRO-BRAKE® FLOW CONTROL & HYDRO-BRAKE® OPTIMUM FLOW CONTROL ARE REGISTERED TRADEMARKS FOR FLOW CONTROLS DESIGNED AND MANUFACTURED EXCLUSIVELY BY HYDRO INTERNATIONAL

THIS DESIGN LAYOUT IS FOR ILLUSTRATIVE PURPOSES ONLY. NOT TO SCALE.

DESIGN ADVICE

The head/flow characteristics of this SHE-0126-6800-0700-6800 Hydro-Brake® Optimum Flow Control are unique. Dynamic hydraulic modelling evaluates the full head/flow characteristic curve.
The use of any other flow control will invalidate any design based on this data and could constitute a flood risk.

Hydro International®

DATE	12/07/2023 13:58
SITE	BENNETT STREET
DESIGNER	Robin Foster
REF	SHB2-1

SHE-0126-6800-0700-6800
Hydro-Brake® Optimum

© 2023
Hydro International Ltd • Unit 2, Rivermead Court • Kenn Business Park • Windmill Road • Kenn • Clevedon • BS21 6FT • Tel: 01275 878371 • www.hydro-int.com • Email: Enquiries@hydro-int.com

rf@refa.co.uk


Technical Specification

Control Point	Head (m)	Flow (l/s)
Primary Design	0.700	6.800
Flush-Flo	0.225	6.789
Kick-Flo®	0.496	5.794
Mean Flow		5.744

BBA APPROVAL INSPECTION TESTING CERTIFICATION
CERTIFICATE No 08/4596

wrc approved™
PT/503/0422
Valid: 01/04/2022 - 31/03/2027

hydro-int.com/patents

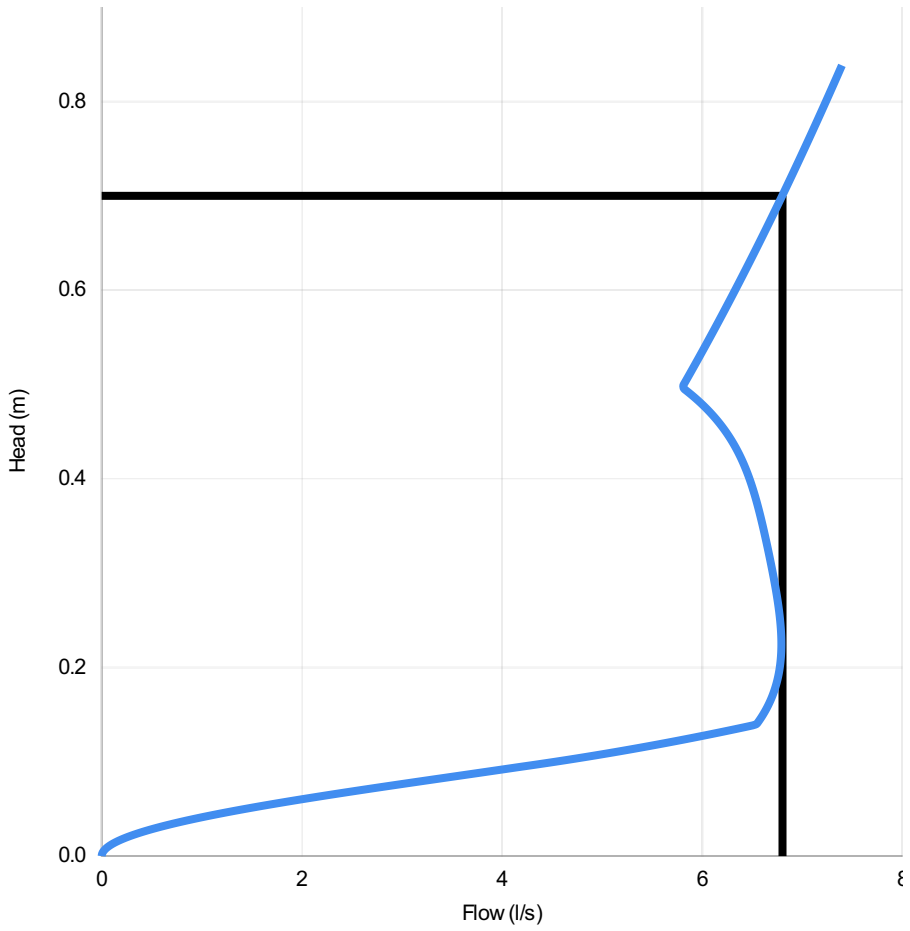

Head (m)	Flow (l/s)
0.000	0.000
0.024	0.362
0.048	1.341
0.072	2.742
0.097	4.308
0.121	5.672
0.145	6.574
0.169	6.695
0.193	6.762
0.217	6.787
0.241	6.783
0.266	6.759
0.290	6.721
0.314	6.677
0.338	6.629
0.362	6.575
0.386	6.513
0.410	6.433
0.434	6.325
0.459	6.173
0.483	5.959
0.507	5.851
0.531	5.978
0.555	6.102
0.579	6.224
0.603	6.343
0.628	6.460
0.652	6.574
0.676	6.687
0.700	6.797

DESIGN ADVICE

The head/flow characteristics of this SHE-0126-6800-0700-6800 Hydro-Brake Optimum® Flow Control are unique. Dynamic hydraulic modelling evaluates the full head/flow characteristic curve.

! **The use of any other flow control will invalidate any design based on this data and could constitute a flood risk.**

Hydro International®

DATE	12/07/2023 13:58
Site	BENNETT STREET
DESIGNER	Robin Foster
Ref	SHB2-1

SHE-0126-6800-0700-6800

Hydro-Brake Optimum®

© 2018 Hydro International, Rivermead Court, Kenn Business Park, Windmill Road, Kenn, Clevedon, BS21 6FT. Tel 01275 878371 Fax 01275 874979 Web www.hydro-int.com Email designtools@hydro-int.com

Technical Specification

Control Point	Head (m)	Flow (l/s)
Primary Design	1.360	7.800
Flush-Flo™	0.401	7.789
Kick-Flo®	0.848	6.256
Mean Flow		6.800


Hydro-Brake® Optimum Flow Control including:


- 3 mm grade 304L stainless steel
- Integral stainless steel pivoting by-pass door allowing clear line of sight through to outlet, c/w stainless steel operating rope
- Beed blasted finish to maximise corrosion resistance
- Stainless steel fixings
- Rubber gasket to seal outlet
- Indicative Weight: 20 kg


BBA APPROVAL INSPECTION TESTING CERTIFICATION CERTIFICATE 08/4596

wrc approved PT/503/0422 Valid: 01/04/2022 - 31/03/2027


hydro-int.com/patents

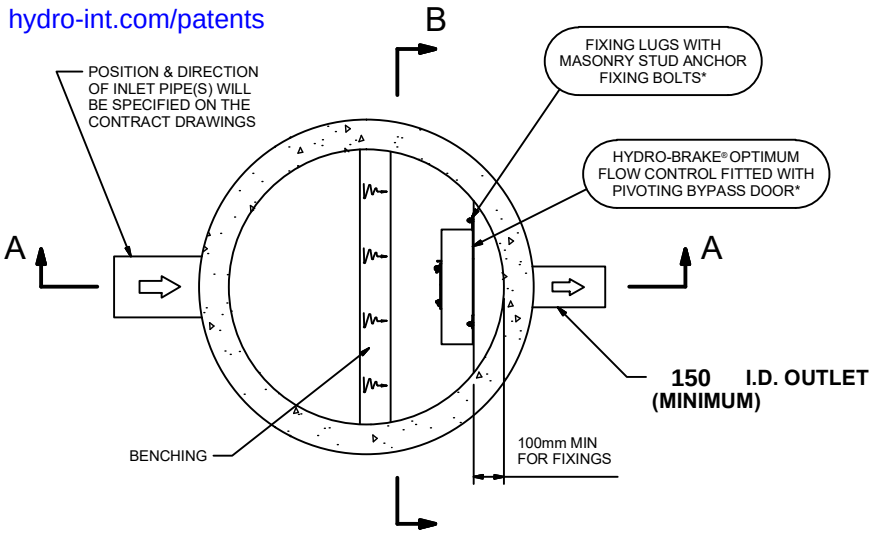



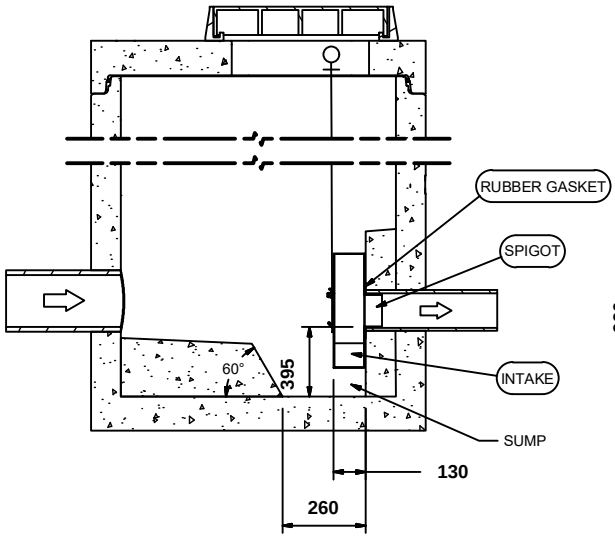

SECTION A-A

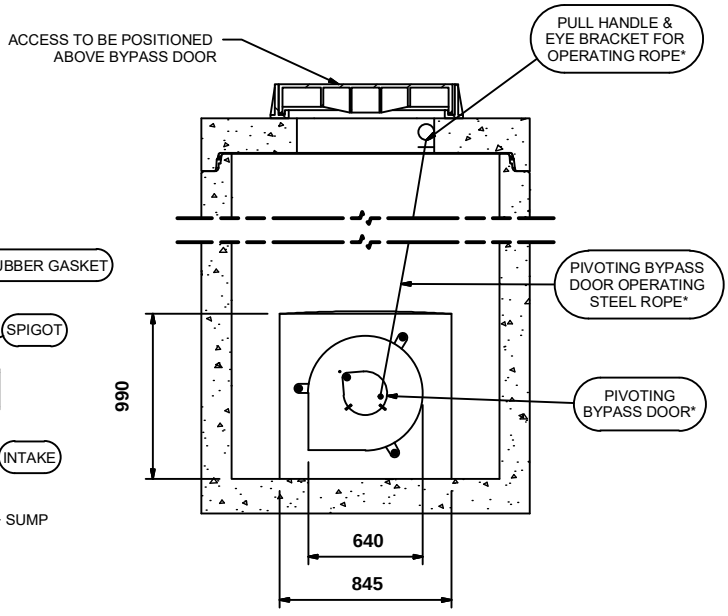

SECTION B-B

IMPORTANT: ⬭ LIMIT OF HYDRO INTERNATIONAL SUPPLY
THE DEVICE WILL BE HANDED TO SUIT SITE CONDITIONS
FOR SITE SPECIFIC DETAILS AND MINIMUM CHAMBER SIZE REFER TO HYDRO INTERNATIONAL
ALL CIVIL AND INSTALLATION WORK BY OTHERS
* WHERE SUPPLIED
HYDRO-BRAKE® FLOW CONTROL & HYDRO-BRAKE® OPTIMUM FLOW CONTROL ARE REGISTERED TRADEMARKS FOR FLOW CONTROLS DESIGNED AND MANUFACTURED EXCLUSIVELY BY HYDRO INTERNATIONAL

THIS DESIGN LAYOUT IS FOR ILLUSTRATIVE PURPOSES ONLY. NOT TO SCALE.

DESIGN ADVICE

The head/flow characteristics of this SHE-0125-7800-1360-7800 Hydro-Brake® Optimum Flow Control are unique. Dynamic hydraulic modelling evaluates the full head/flow characteristic curve.
The use of any other flow control will invalidate any design based on this data and could constitute a flood risk.

Hydro International®

DATE	12/07/2023 14:00
SITE	BENNETT STREET
DESIGNER	Robin Foster
REF	SHB2-2

SHE-0125-7800-1360-7800
Hydro-Brake® Optimum

© 2023
Hydro International Ltd • Unit 2, Rivermead Court • Kenn Business Park • Windmill Road • Kenn • Clevedon • BS21 6FT • Tel: 01275 878371 • www.hydro-int.com • Email: Enquiries@hydro-int.com

rf@refa.co.uk


Technical Specification

Control Point	Head (m)	Flow (l/s)
Primary Design	1.360	7.800
Flush-Flo	0.401	7.789
Kick-Flo®	0.848	6.256
Mean Flow		6.800

BBA APPROVAL INSPECTION TESTING CERTIFICATION
CERTIFICATE No 08/4596

wrc approved
PT/503/0422
Valid: 01/04/2022 - 31/03/2027

hydro-int.com/patents

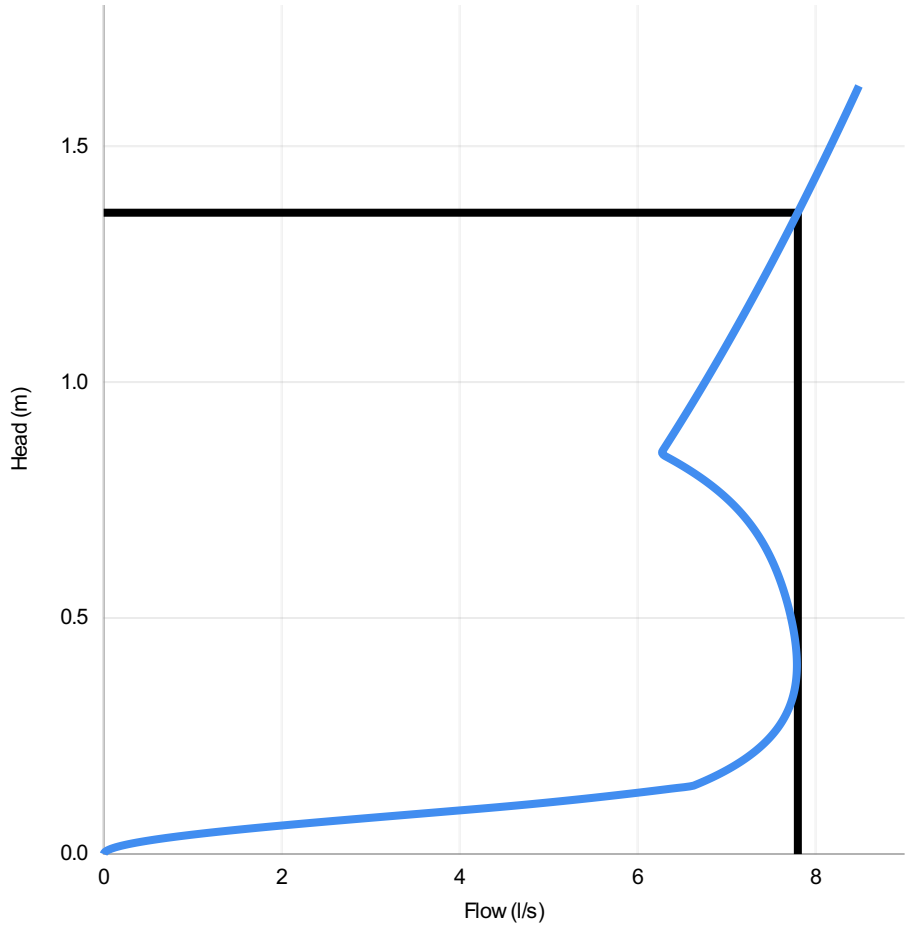

Head (m)	Flow (l/s)
0.000	0.000
0.047	1.260
0.094	4.070
0.141	6.455
0.188	7.088
0.234	7.420
0.281	7.623
0.328	7.736
0.375	7.783
0.422	7.786
0.469	7.757
0.516	7.705
0.563	7.633
0.610	7.540
0.657	7.417
0.703	7.250
0.750	7.023
0.797	6.716
0.844	6.307
0.891	6.401
0.938	6.556
0.985	6.707
1.032	6.854
1.079	6.997
1.126	7.138
1.172	7.275
1.219	7.410
1.266	7.542
1.313	7.671
1.360	7.798

DESIGN ADVICE

The head/flow characteristics of this SHE-0125-7800-1360-7800 Hydro-Brake Optimum® Flow Control are unique. Dynamic hydraulic modelling evaluates the full head/flow characteristic curve.

! **The use of any other flow control will invalidate any design based on this data and could constitute a flood risk.**

Hydro International®

DATE	12/07/2023 14:00
Site	BENNETT STREET
DESIGNER	Robin Foster
Ref	SHB2-2

SHE-0125-7800-1360-7800

Hydro-Brake Optimum®

© 2018 Hydro International, Rivermead Court, Kenn Business Park, Windmill Road, Kenn, Clevedon, BS21 6FT. Tel 01275 878371 Fax 01275 874979 Web www.hydro-int.com Email designtools@hydro-int.com

Technical Specification

Control Point	Head (m)	Flow (l/s)
Primary Design	0.700	8.600
Flush-Flo™	0.237	8.596
Kick-Flo®	0.507	7.396
Mean Flow		7.208


Hydro-Brake® Optimum Flow Control including:


- 3 mm grade 304L stainless steel
- Integral stainless steel pivoting by-pass door allowing clear line of sight through to outlet, c/w stainless steel operating rope
- Beed blasted finish to maximise corrosion resistance
- Stainless steel fixings
- Rubber gasket to seal outlet
- Indicative Weight: 20 kg


BBA APPROVAL INSPECTION TESTING CERTIFICATION CERTIFICATE 08/4596

wrc approved PT/503/0422 Valid: 01/04/2022 - 31/03/2027


hydro-int.com/patents

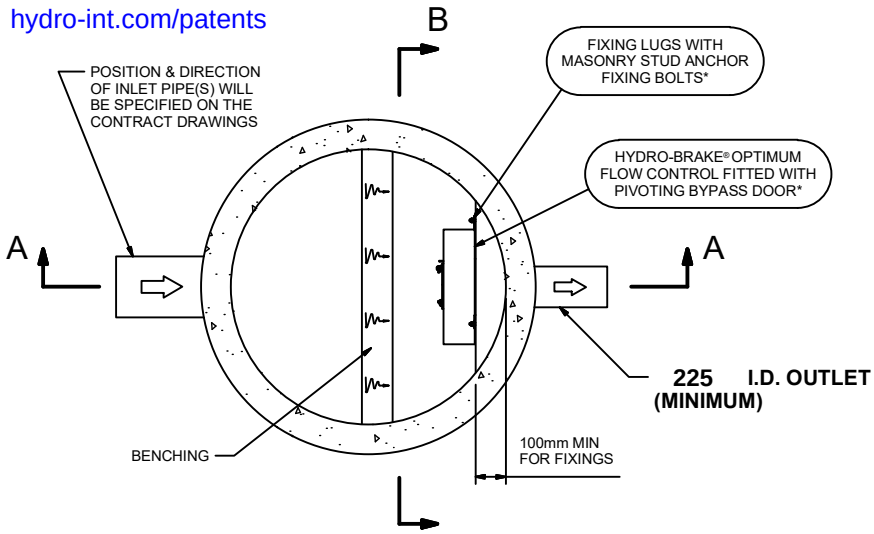



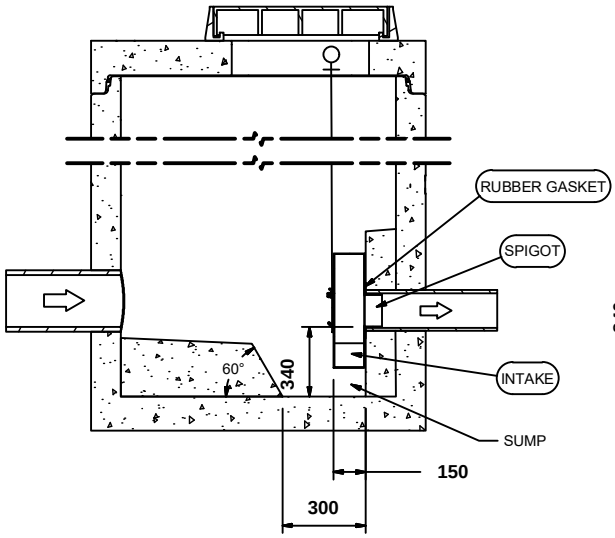

SECTION A-A

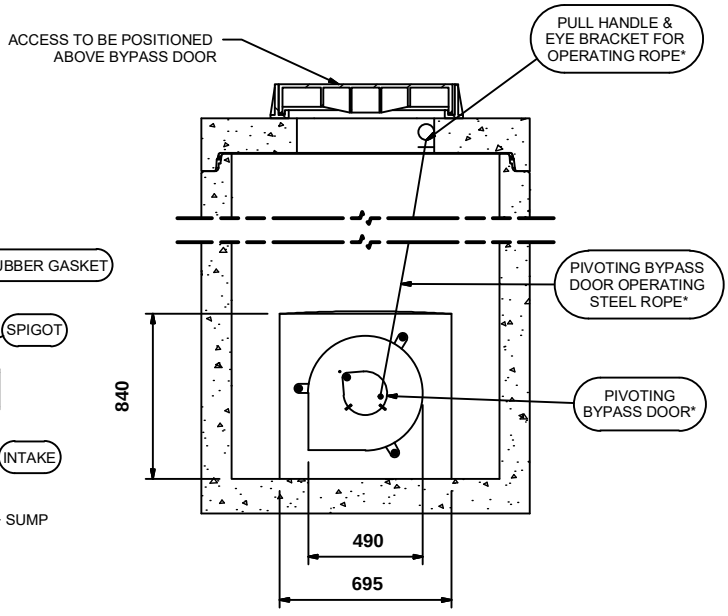

SECTION B-B

IMPORTANT: ⬭ LIMIT OF HYDRO INTERNATIONAL SUPPLY
THE DEVICE WILL BE HANDED TO SUIT SITE CONDITIONS
FOR SITE SPECIFIC DETAILS AND MINIMUM CHAMBER SIZE REFER TO HYDRO INTERNATIONAL
ALL CIVIL AND INSTALLATION WORK BY OTHERS
* WHERE SUPPLIED
HYDRO-BRAKE® FLOW CONTROL & HYDRO-BRAKE® OPTIMUM FLOW CONTROL ARE REGISTERED TRADEMARKS FOR FLOW CONTROLS DESIGNED AND MANUFACTURED EXCLUSIVELY BY HYDRO INTERNATIONAL

THIS DESIGN LAYOUT IS FOR ILLUSTRATIVE PURPOSES ONLY. NOT TO SCALE.

DESIGN ADVICE

The head/flow characteristics of this SHE-0140-8600-0700-8600 Hydro-Brake® Optimum Flow Control are unique. Dynamic hydraulic modelling evaluates the full head/flow characteristic curve.
The use of any other flow control will invalidate any design based on this data and could constitute a flood risk.

Hydro International®

DATE	12/07/2023 14:01
SITE	BENNETT STREET
DESIGNER	Robin Foster
REF	SHB3-1

SHE-0140-8600-0700-8600
Hydro-Brake® Optimum

© 2023
Hydro International Ltd • Unit 2, Rivermead Court • Kenn Business Park • Windmill Road • Kenn • Clevedon • BS21 6FT • Tel: 01275 878371 • www.hydro-int.com • Email: Enquiries@hydro-int.com

rf@refa.co.uk


Technical Specification

Control Point	Head (m)	Flow (l/s)
Primary Design	0.700	8.600
Flush-Flo	0.237	8.596
Kick-Flo®	0.507	7.396
Mean Flow		7.208

BBA APPROVAL INSPECTION TESTING CERTIFICATION
CERTIFICATE No 08/4596

wrc approved™
PT/503/0422
Valid: 01/04/2022 - 31/03/2027

hydro-int.com/patents

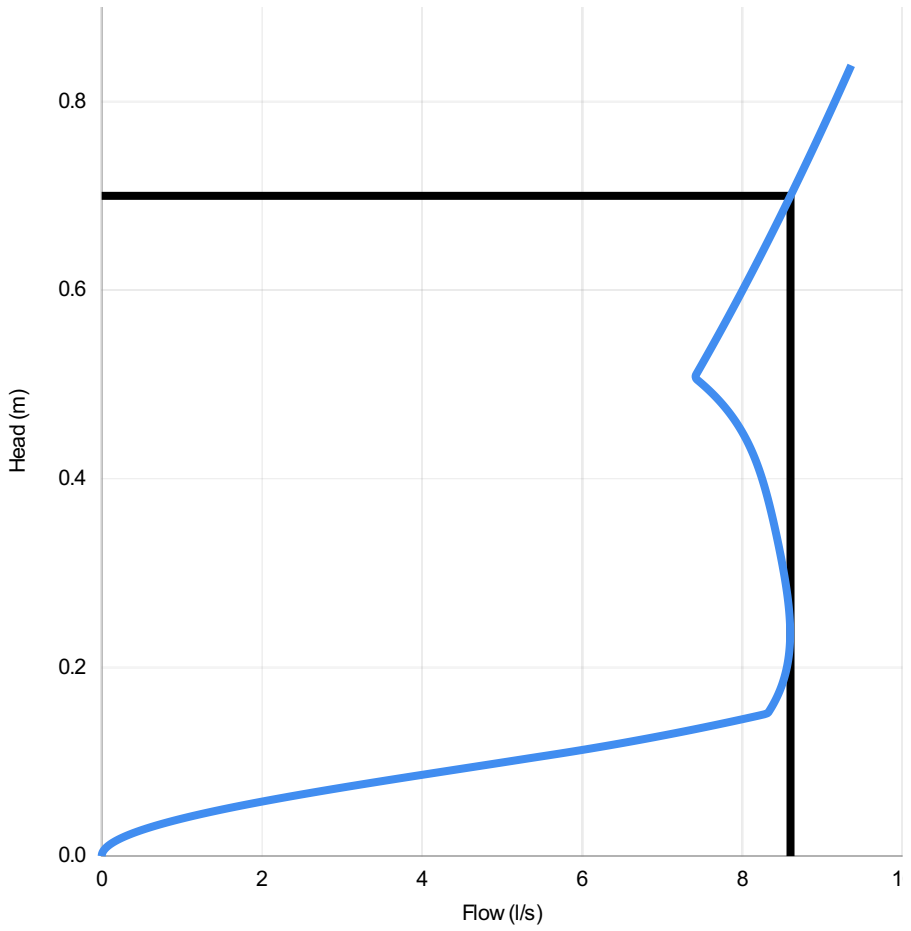

Head (m)	Flow (l/s)
0.000	0.000
0.024	0.384
0.048	1.439
0.072	2.984
0.097	4.793
0.121	6.554
0.145	7.983
0.169	8.433
0.193	8.535
0.217	8.585
0.241	8.595
0.266	8.576
0.290	8.538
0.314	8.488
0.338	8.430
0.362	8.366
0.386	8.294
0.410	8.205
0.434	8.089
0.459	7.931
0.483	7.711
0.507	7.418
0.531	7.559
0.555	7.717
0.579	7.872
0.603	8.023
0.628	8.171
0.652	8.317
0.676	8.460
0.700	8.600

DESIGN ADVICE

The head/flow characteristics of this SHE-0140-8600-0700-8600 Hydro-Brake Optimum® Flow Control are unique. Dynamic hydraulic modelling evaluates the full head/flow characteristic curve.

! **The use of any other flow control will invalidate any design based on this data and could constitute a flood risk.**

Hydro International®

DATE	12/07/2023 14:01
Site	BENNETT STREET
DESIGNER	Robin Foster
Ref	SHB3-1

SHE-0140-8600-0700-8600

Hydro-Brake Optimum®

© 2018 Hydro International, Rivermead Court, Kenn Business Park, Windmill Road, Kenn, Clevedon, BS21 6FT. Tel 01275 878371 Fax 01275 874979 Web www.hydro-int.com Email designtools@hydro-int.com

Technical Specification

Control Point	Head (m)	Flow (l/s)
Primary Design	1.450	8.500
Flush-Flo™	0.428	8.496
Kick-Flo®	0.902	6.800
Mean Flow		7.418


Hydro-Brake® Optimum Flow Control including:


- 3 mm grade 304L stainless steel
- Integral stainless steel pivoting by-pass door allowing clear line of sight through to outlet, c/w stainless steel operating rope
- Beed blasted finish to maximise corrosion resistance
- Stainless steel fixings
- Rubber gasket to seal outlet
- Indicative Weight: 20 kg


BBA APPROVAL INSPECTION TESTING CERTIFICATION
CERTIFICATE 08/4596

wrc approved
PT/503/0422
Valid: 01/04/2022 - 31/03/2027

hydro-int.com/patents

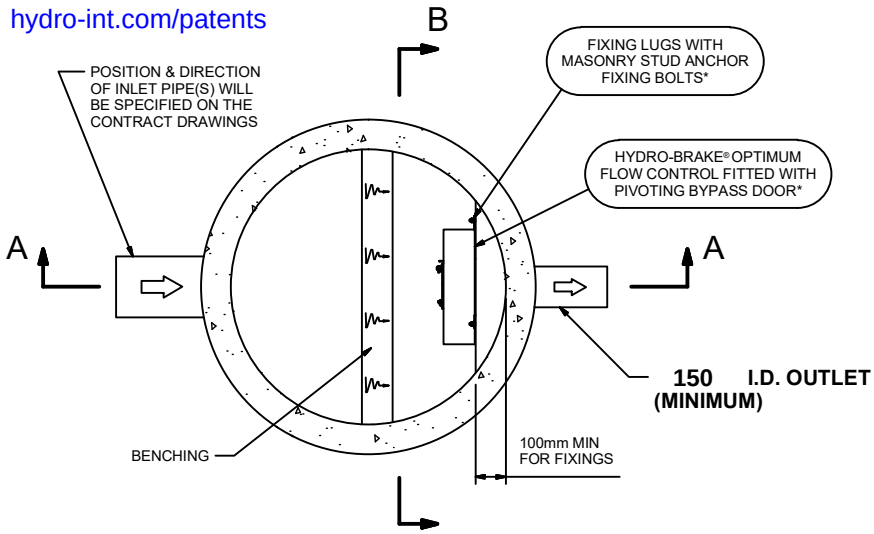



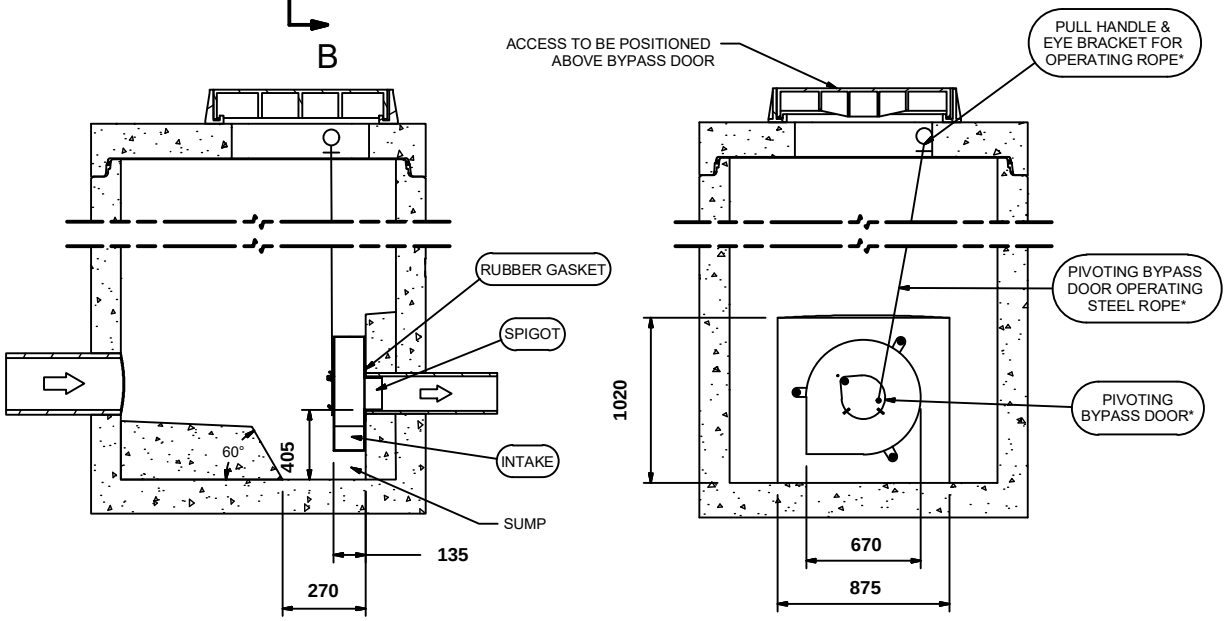

SECTION A-A

SECTION B-B

IMPORTANT: ⬭ LIMIT OF HYDRO INTERNATIONAL SUPPLY
THE DEVICE WILL BE HANDED TO SUIT SITE CONDITIONS
FOR SITE SPECIFIC DETAILS AND MINIMUM CHAMBER SIZE REFER TO HYDRO INTERNATIONAL
ALL CIVIL AND INSTALLATION WORK BY OTHERS
* WHERE SUPPLIED
HYDRO-BRAKE® FLOW CONTROL & HYDRO-BRAKE® OPTIMUM FLOW CONTROL ARE REGISTERED TRADEMARKS FOR FLOW CONTROLS DESIGNED AND MANUFACTURED EXCLUSIVELY BY HYDRO INTERNATIONAL

THIS DESIGN LAYOUT IS FOR ILLUSTRATIVE PURPOSES ONLY. NOT TO SCALE.

DESIGN ADVICE

The head/flow characteristics of this SHE-0129-8500-1450-8500 Hydro-Brake® Optimum Flow Control are unique. Dynamic hydraulic modelling evaluates the full head/flow characteristic curve.
The use of any other flow control will invalidate any design based on this data and could constitute a flood risk.

Hydro International®

DATE	12/07/2023 14:03
SITE	BENNETT STREET
DESIGNER	Robin Foster
REF	SHB3-2

SHE-0129-8500-1450-8500
Hydro-Brake® Optimum

© 2023
Hydro International Ltd • Unit 2, Rivermead Court • Kenn Business Park • Windmill Road • Kenn • Clevedon • BS21 6FT • Tel: 01275 878371 • www.hydro-int.com • Email: Enquiries@hydro-int.com

rf@refa.co.uk


Technical Specification

Control Point	Head (m)	Flow (l/s)
Primary Design	1.450	8.500
Flush-Flo	0.428	8.496
Kick-Flo®	0.902	6.800
Mean Flow		7.418

BBA APPROVAL INSPECTION TESTING CERTIFICATION
CERTIFICATE No 08/4596

wrc approved™
PT/503/0422
Valid: 01/04/2022 - 31/03/2027

hydro-int.com/patents

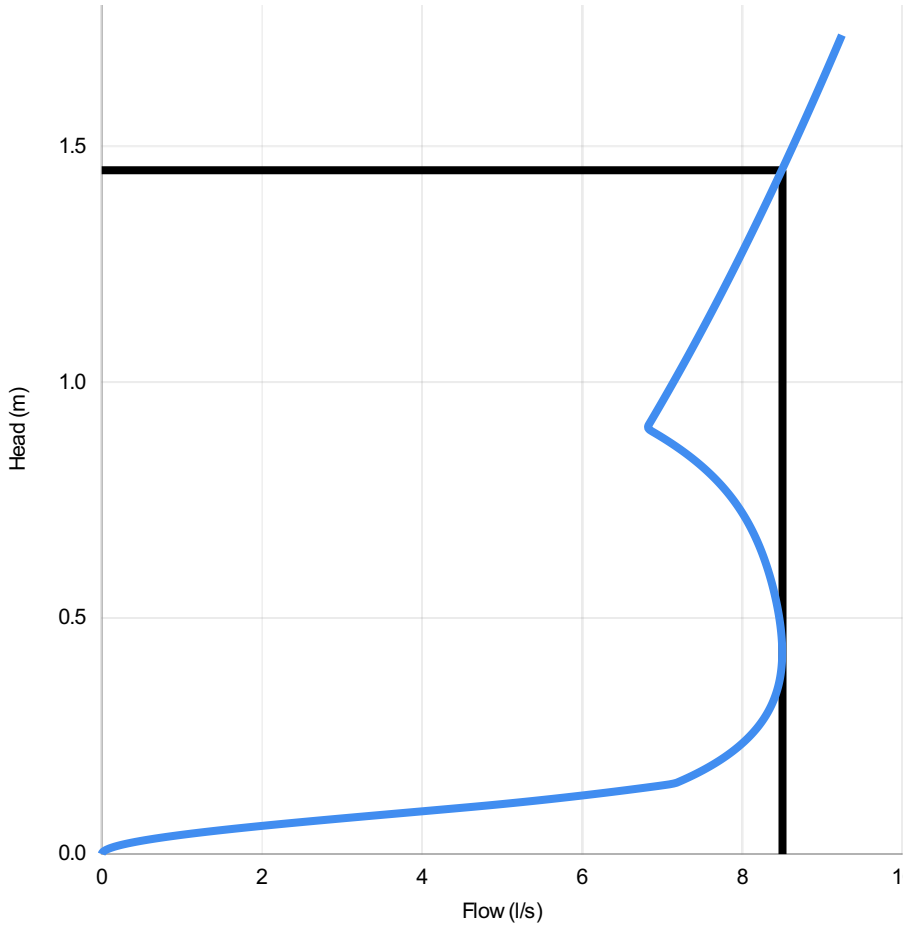

Head (m)	Flow (l/s)
0.000	0.000
0.050	1.447
0.100	4.616
0.150	7.160
0.200	7.727
0.250	8.091
0.300	8.314
0.350	8.437
0.400	8.490
0.450	8.493
0.500	8.461
0.550	8.403
0.600	8.323
0.650	8.218
0.700	8.078
0.750	7.890
0.800	7.635
0.850	7.290
0.900	6.833
0.950	6.967
1.000	7.136
1.050	7.300
1.100	7.460
1.150	7.617
1.200	7.770
1.250	7.920
1.300	8.067
1.350	8.211
1.400	8.352
1.450	8.491

DESIGN ADVICE

The head/flow characteristics of this SHE-0129-8500-1450-8500 Hydro-Brake Optimum® Flow Control are unique. Dynamic hydraulic modelling evaluates the full head/flow characteristic curve.

! **The use of any other flow control will invalidate any design based on this data and could constitute a flood risk.**

Hydro International®

DATE	12/07/2023 14:03
Site	BENNETT STREET
DESIGNER	Robin Foster
Ref	SHB3-2

SHE-0129-8500-1450-8500

Hydro-Brake Optimum®

© 2018 Hydro International, Rivermead Court, Kenn Business Park, Windmill Road, Kenn, Clevedon, BS21 6FT. Tel 01275 878371 Fax 01275 874979 Web www.hydro-int.com Email designtools@hydro-int.com

Technical Specification

Control Point	Head (m)	Flow (l/s)
Primary Design	1.000	5.200
Flush-Flo™	0.296	5.193
Kick-Flo®	0.641	4.233
Mean Flow		4.515


Hydro-Brake® Optimum Flow Control including:


- 3 mm grade 304L stainless steel
- Integral stainless steel pivoting by-pass door allowing clear line of sight through to outlet, c/w stainless steel operating rope
- Beed blasted finish to maximise corrosion resistance
- Stainless steel fixings
- Rubber gasket to seal outlet
- Indicative Weight: 20 kg


BBA APPROVAL INSPECTION TESTING CERTIFICATION
CERTIFICATE 08/4596

wrc approved
PT/503/0422
Valid: 01/04/2022 - 31/03/2027

hydro-int.com/patents

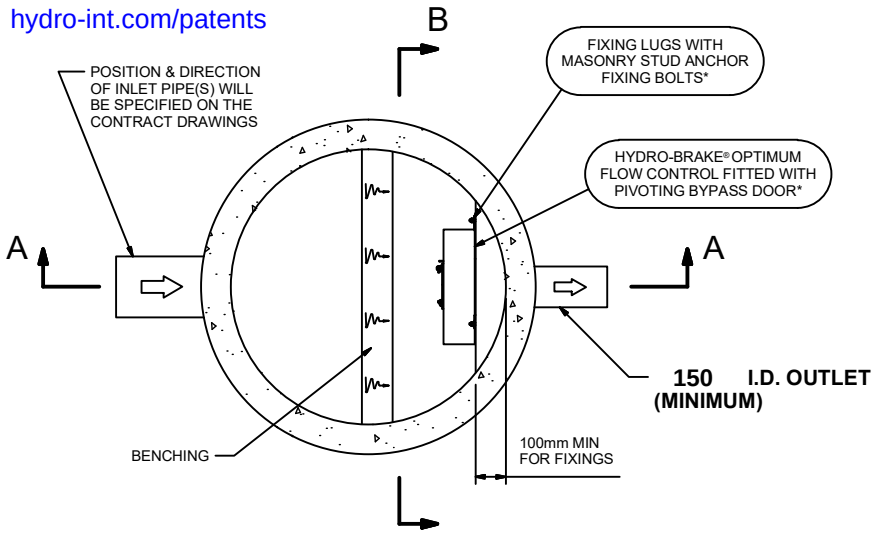



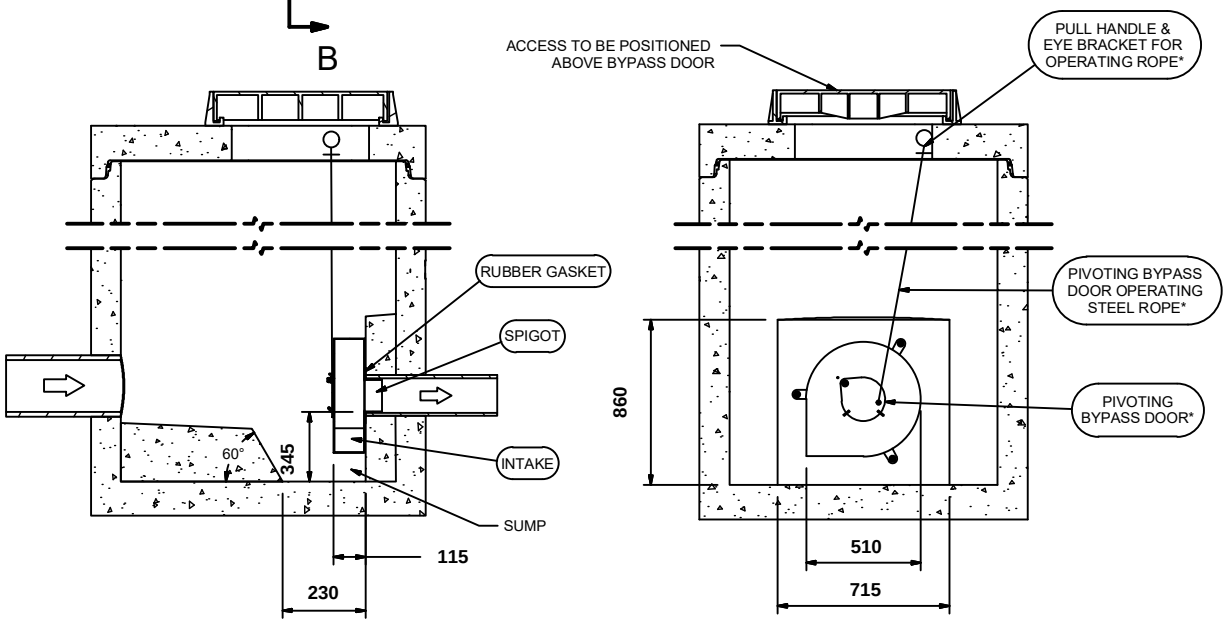

SECTION A-A

SECTION B-B

IMPORTANT: ⬭ LIMIT OF HYDRO INTERNATIONAL SUPPLY
THE DEVICE WILL BE HANDED TO SUIT SITE CONDITIONS
FOR SITE SPECIFIC DETAILS AND MINIMUM CHAMBER SIZE REFER TO HYDRO INTERNATIONAL
ALL CIVIL AND INSTALLATION WORK BY OTHERS
* WHERE SUPPLIED
HYDRO-BRAKE® FLOW CONTROL & HYDRO-BRAKE® OPTIMUM FLOW CONTROL ARE REGISTERED TRADEMARKS FOR FLOW CONTROLS DESIGNED AND MANUFACTURED EXCLUSIVELY BY HYDRO INTERNATIONAL

THIS DESIGN LAYOUT IS FOR ILLUSTRATIVE PURPOSES ONLY. NOT TO SCALE.

DESIGN ADVICE

The head/flow characteristics of this SHE-0108-5200-1000-5200 Hydro-Brake® Optimum Flow Control are unique. Dynamic hydraulic modelling evaluates the full head/flow characteristic curve.
The use of any other flow control will invalidate any design based on this data and could constitute a flood risk.

Hydro International®

DATE	12/07/2023 14:04
SITE	BENNETT STREET
DESIGNER	Robin Foster
REF	SHB4-1

SHE-0108-5200-1000-5200
Hydro-Brake® Optimum

© 2023
Hydro International Ltd • Unit 2, Rivermead Court • Kenn Business Park • Windmill Road • Kenn • Clevedon • BS21 6FT • Tel: 01275 878371 • www.hydro-int.com • Email: Enquiries@hydro-int.com

rf@refa.co.uk


Technical Specification

Control Point	Head (m)	Flow (l/s)
Primary Design	1.000	5.200
Flush-Flo	0.296	5.193
Kick-Flo®	0.641	4.233
Mean Flow		4.515

BBA APPROVAL INSPECTION TESTING CERTIFICATION
CERTIFICATE No 08/4596

wrc approved™
PT/503/0422
Valid: 01/04/2022 - 31/03/2027

hydro-int.com/patents

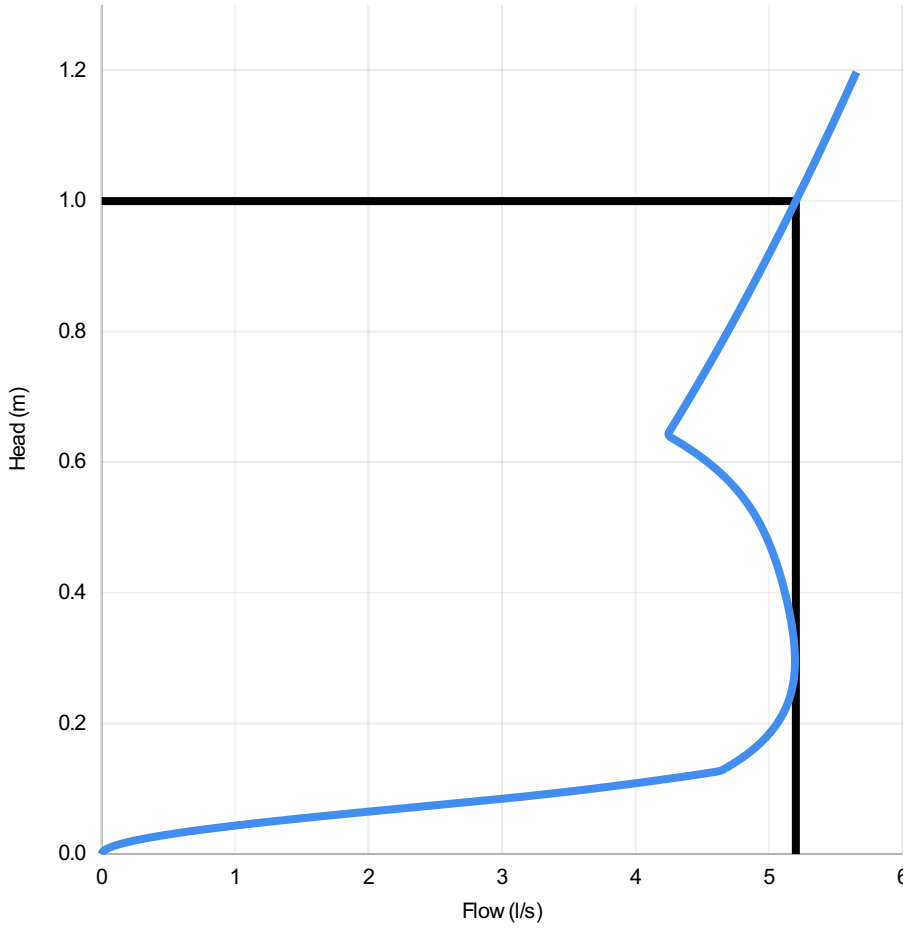

Head (m)	Flow (l/s)
0.000	0.000
0.034	0.646
0.069	2.197
0.103	3.808
0.138	4.726
0.172	4.946
0.207	5.081
0.241	5.157
0.276	5.189
0.310	5.192
0.345	5.174
0.379	5.143
0.414	5.101
0.448	5.050
0.483	4.985
0.517	4.899
0.552	4.782
0.586	4.621
0.621	4.401
0.655	4.277
0.690	4.379
0.724	4.478
0.759	4.576
0.793	4.670
0.828	4.763
0.862	4.854
0.897	4.943
0.931	5.030
0.966	5.115
1.000	5.199

DESIGN ADVICE

The head/flow characteristics of this SHE-0108-5200-1000-5200 Hydro-Brake Optimum® Flow Control are unique. Dynamic hydraulic modelling evaluates the full head/flow characteristic curve.

! **The use of any other flow control will invalidate any design based on this data and could constitute a flood risk.**

Hydro International®

DATE	12/07/2023 14:04
Site	BENNETT STREET
DESIGNER	Robin Foster
Ref	SHB4-1

SHE-0108-5200-1000-5200

Hydro-Brake Optimum®

© 2018 Hydro International, Rivermead Court, Kenn Business Park, Windmill Road, Kenn, Clevedon, BS21 6FT. Tel 01275 878371 Fax 01275 874979 Web www.hydro-int.com Email designtools@hydro-int.com

Technical Specification

Control Point	Head (m)	Flow (l/s)
Primary Design	1.900	6.600
Flush-Flo™	0.467	6.024
Kick-Flo®	0.955	4.792
Mean Flow		5.473


Hydro-Brake® Optimum Flow Control including:

- 3 mm grade 304L stainless steel
- Integral stainless steel pivoting by-pass door allowing clear line of sight through to outlet, c/w stainless steel operating rope
- Beed blasted finish to maximise corrosion resistance
- Stainless steel fixings
- Rubber gasket to seal outlet
- Indicative Weight: 20 kg

BBA APPROVAL INSPECTION TESTING CERTIFICATION CERTIFICATE 08/4596

wrc approved PT/503/0422 Valid: 01/04/2022 - 31/03/2027

hydro-int.com/patents

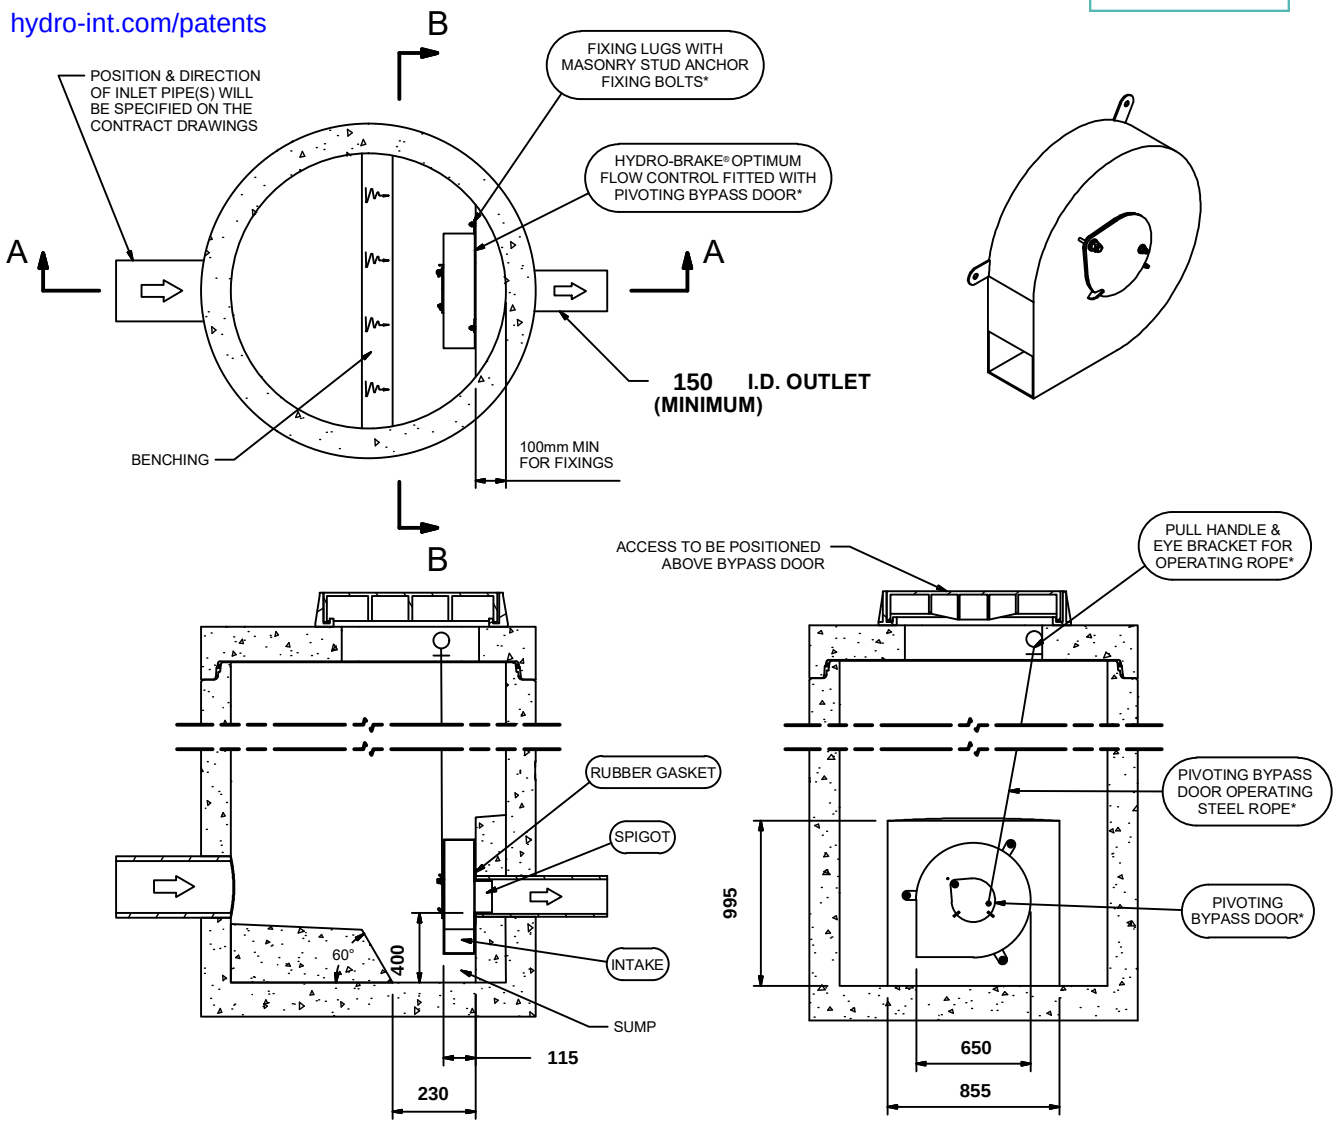

SECTION A-A

SECTION B-B

IMPORTANT: ⬭ LIMIT OF HYDRO INTERNATIONAL SUPPLY
THE DEVICE WILL BE HANDED TO SUIT SITE CONDITIONS
FOR SITE SPECIFIC DETAILS AND MINIMUM CHAMBER SIZE REFER TO HYDRO INTERNATIONAL
ALL CIVIL AND INSTALLATION WORK BY OTHERS
* WHERE SUPPLIED
HYDRO-BRAKE® FLOW CONTROL & HYDRO-BRAKE® OPTIMUM FLOW CONTROL ARE REGISTERED TRADEMARKS FOR FLOW CONTROLS DESIGNED AND MANUFACTURED EXCLUSIVELY BY HYDRO INTERNATIONAL

THIS DESIGN LAYOUT IS FOR ILLUSTRATIVE PURPOSES ONLY. NOT TO SCALE.

DESIGN ADVICE

The head/flow characteristics of this SHE-0107-6600-1900-6600 Hydro-Brake® Optimum Flow Control are unique. Dynamic hydraulic modelling evaluates the full head/flow characteristic curve.
The use of any other flow control will invalidate any design based on this data and could constitute a flood risk.

Hydro International®

DATE	12/07/2023 14:05
SITE	BENNETT STREET
DESIGNER	Robin Foster
REF	SHB4-2

SHE-0107-6600-1900-6600
Hydro-Brake® Optimum

© 2023
Hydro International Ltd • Unit 2, Rivermead Court • Kenn Business Park • Windmill Road • Kenn • Clevedon • BS21 6FT • Tel: 01275 878371 • www.hydro-int.com • Email: Enquiries@hydro-int.com

rf@refa.co.uk


Technical Specification

Control Point	Head (m)	Flow (l/s)
Primary Design	1.900	6.600
Flush-Flo	0.467	6.024
Kick-Flo®	0.955	4.792
Mean Flow		5.473

BBA APPROVAL INSPECTION TESTING CERTIFICATION
CERTIFICATE No 08/4596

wrc approved™
PT/503/0422
Valid: 01/04/2022 - 31/03/2027

hydro-int.com/patents

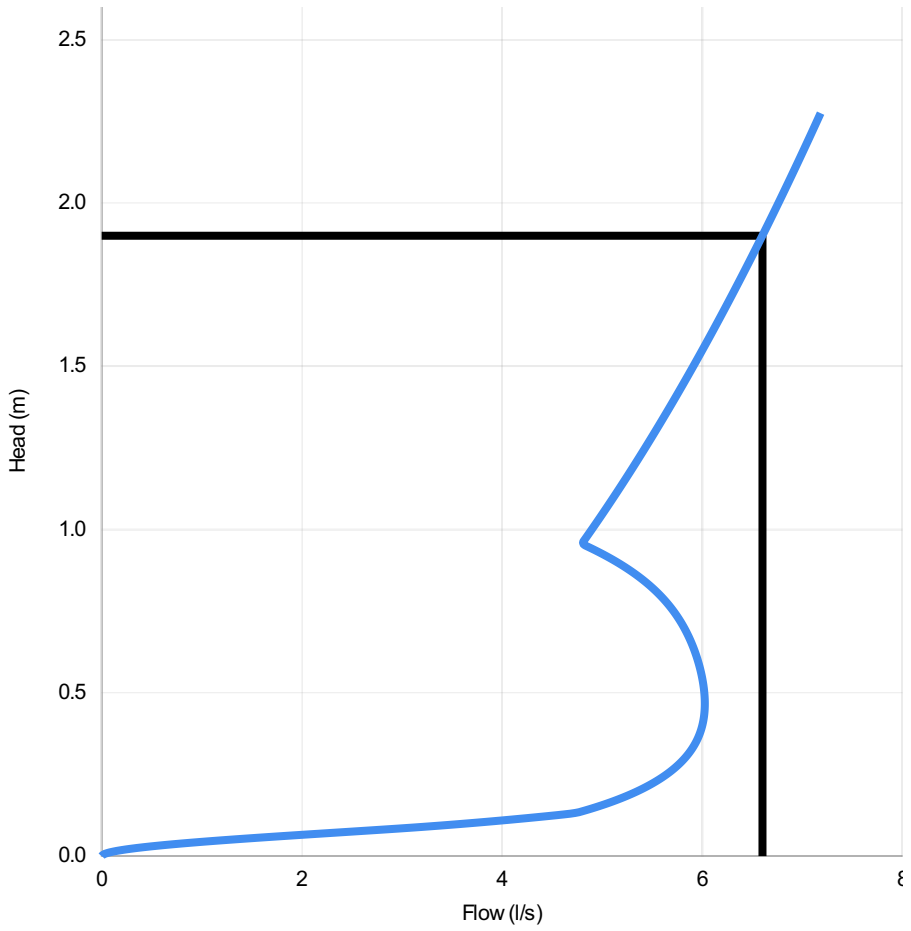

Head (m)	Flow (l/s)
0.000	0.000
0.066	2.014
0.131	4.727
0.197	5.335
0.262	5.693
0.328	5.894
0.393	5.993
0.459	6.024
0.524	6.010
0.590	5.963
0.655	5.888
0.721	5.777
0.786	5.616
0.852	5.382
0.917	5.050
0.983	4.855
1.048	5.002
1.114	5.145
1.179	5.283
1.245	5.417
1.310	5.548
1.376	5.675
1.441	5.800
1.507	5.921
1.572	6.040
1.638	6.156
1.703	6.270
1.769	6.381
1.834	6.491
1.900	6.598

DESIGN ADVICE

The head/flow characteristics of this SHE-0107-6600-1900-6600 Hydro-Brake Optimum® Flow Control are unique. Dynamic hydraulic modelling evaluates the full head/flow characteristic curve.

! **The use of any other flow control will invalidate any design based on this data and could constitute a flood risk.**

Hydro International®

DATE	12/07/2023 14:05
Site	BENNETT STREET
DESIGNER	Robin Foster
Ref	SHB4-2

SHE-0107-6600-1900-6600

Hydro-Brake Optimum®

© 2018 Hydro International, Rivermead Court, Kenn Business Park, Windmill Road, Kenn, Clevedon, BS21 6FT. Tel 01275 878371 Fax 01275 874979 Web www.hydro-int.com Email designtools@hydro-int.com

Technical Specification

Control Point	Head (m)	Flow (l/s)
Primary Design	0.850	5.000
Flush-Flo™	0.255	4.990
Kick-Flo®	0.562	4.130
Mean Flow		4.315


Hydro-Brake® Optimum Flow Control including:

- 3 mm grade 304L stainless steel
- Integral stainless steel pivoting by-pass door allowing clear line of sight through to outlet, c/w stainless steel operating rope
- Beed blasted finish to maximise corrosion resistance
- Stainless steel fixings
- Rubber gasket to seal outlet
- Indicative Weight: 10 kg

BBA APPROVAL INSPECTION TESTING CERTIFICATION CERTIFICATE 08/4596

wrc approved PT/503/0422 Valid: 01/04/2022 - 31/03/2027

hydro-int.com/patents

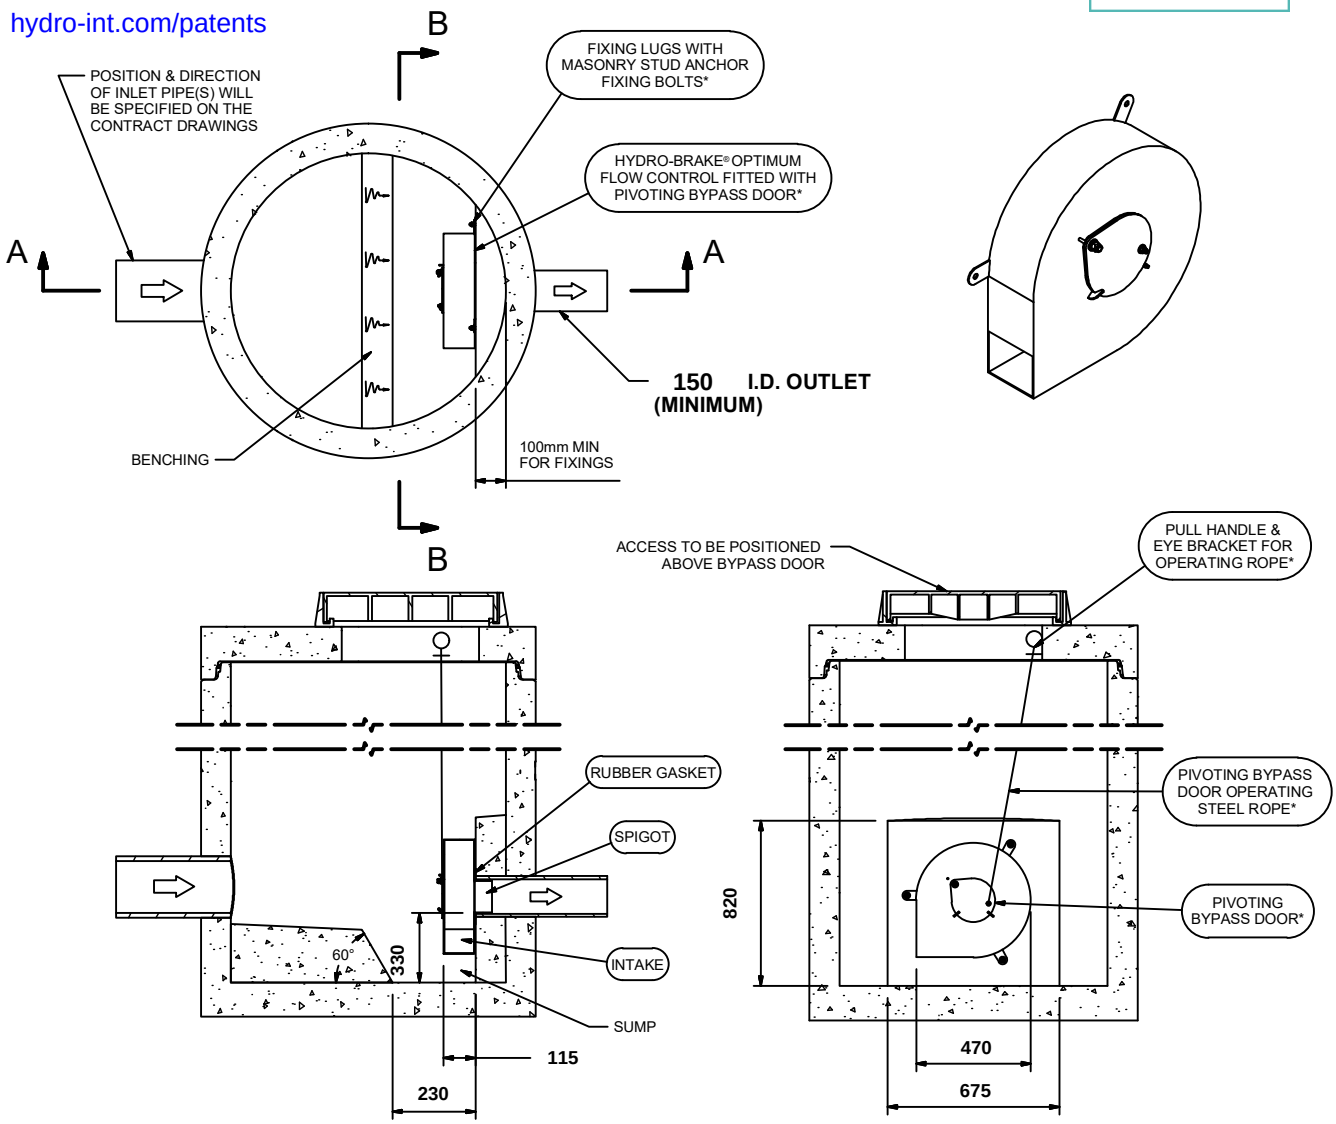

SECTION A-A

SECTION B-B

IMPORTANT: ⬭ LIMIT OF HYDRO INTERNATIONAL SUPPLY
THE DEVICE WILL BE HANDED TO SUIT SITE CONDITIONS
FOR SITE SPECIFIC DETAILS AND MINIMUM CHAMBER SIZE REFER TO HYDRO INTERNATIONAL
ALL CIVIL AND INSTALLATION WORK BY OTHERS
* WHERE SUPPLIED
HYDRO-BRAKE® FLOW CONTROL & HYDRO-BRAKE® OPTIMUM FLOW CONTROL ARE REGISTERED TRADEMARKS FOR FLOW CONTROLS DESIGNED AND MANUFACTURED EXCLUSIVELY BY HYDRO INTERNATIONAL

THIS DESIGN LAYOUT IS FOR ILLUSTRATIVE PURPOSES ONLY. NOT TO SCALE.

DESIGN ADVICE

The head/flow characteristics of this SHE-0108-5000-0850-5000 Hydro-Brake® Optimum Flow Control are unique. Dynamic hydraulic modelling evaluates the full head/flow characteristic curve.
The use of any other flow control will invalidate any design based on this data and could constitute a flood risk.

Hydro International®

DATE	12/07/2023 14:07
SITE	BENNETT STREET
DESIGNER	Robin Foster
REF	SHB5-1

SHE-0108-5000-0850-5000
Hydro-Brake® Optimum

© 2023
Hydro International Ltd • Unit 2, Rivermead Court • Kenn Business Park • Windmill Road • Kenn • Clevedon • BS21 6FT • Tel: 01275 878371 • www.hydro-int.com • Email: Enquiries@hydro-int.com

rf@refa.co.uk


Technical Specification

Control Point	Head (m)	Flow (l/s)
Primary Design	0.850	5.000
Flush-Flo	0.255	4.990
Kick-Flo®	0.562	4.130
Mean Flow		4.315

BBA APPROVAL INSPECTION TESTING CERTIFICATION
CERTIFICATE No 08/4596

wrc approved™
PT/503/0422
Valid: 01/04/2022 - 31/03/2027

hydro-int.com/patents

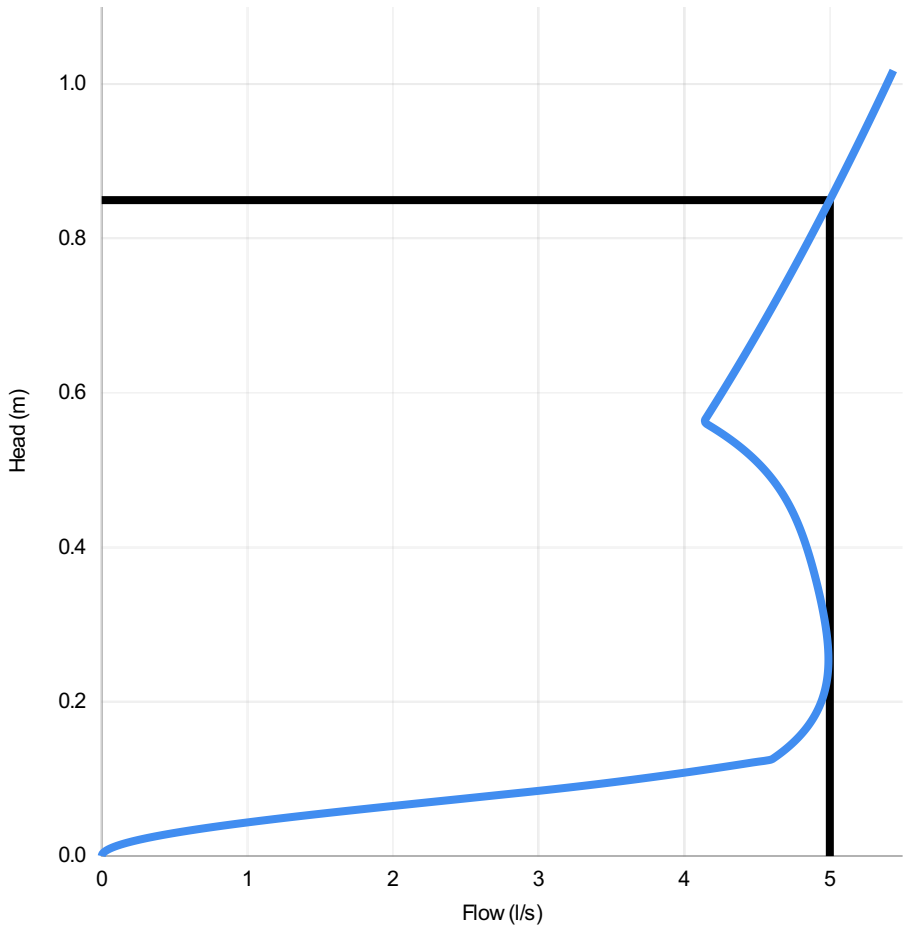

Head (m)	Flow (l/s)
0.000	0.000
0.029	0.477
0.059	1.683
0.088	3.162
0.117	4.330
0.147	4.745
0.176	4.876
0.205	4.951
0.234	4.985
0.264	4.989
0.293	4.975
0.322	4.948
0.352	4.913
0.381	4.872
0.410	4.823
0.440	4.761
0.469	4.678
0.498	4.562
0.528	4.401
0.557	4.181
0.586	4.212
0.616	4.308
0.645	4.401
0.674	4.492
0.703	4.581
0.733	4.668
0.762	4.754
0.791	4.837
0.821	4.919
0.850	5.000

DESIGN ADVICE

The head/flow characteristics of this SHE-0108-5000-0850-5000 Hydro-Brake Optimum® Flow Control are unique. Dynamic hydraulic modelling evaluates the full head/flow characteristic curve.

! **The use of any other flow control will invalidate any design based on this data and could constitute a flood risk.**

Hydro International®

DATE	12/07/2023 14:07
Site	BENNETT STREET
DESIGNER	Robin Foster
Ref	SHB5-1

SHE-0108-5000-0850-5000

Hydro-Brake Optimum®

© 2018 Hydro International, Rivermead Court, Kenn Business Park, Windmill Road, Kenn, Clevedon, BS21 6FT. Tel 01275 878371 Fax 01275 874979 Web www.hydro-int.com Email designtools@hydro-int.com

Technical Specification

Control Point	Head (m)	Flow (l/s)
Primary Design	1.400	5.000
Flush-Flo™	0.416	4.991
Kick-Flo®	0.855	3.980
Mean Flow		4.382


Hydro-Brake® Optimum Flow Control including:

- 3 mm grade 304L stainless steel
- Integral stainless steel pivoting by-pass door allowing clear line of sight through to outlet, c/w stainless steel operating rope
- Beed blasted finish to maximise corrosion resistance
- Stainless steel fixings
- Rubber gasket to seal outlet
- Indicative Weight: 20 kg

BBA APPROVAL INSPECTION TESTING CERTIFICATION CERTIFICATE 08/4596

wrc approved PT/503/0422 Valid: 01/04/2022 - 31/03/2027

hydro-int.com/patents

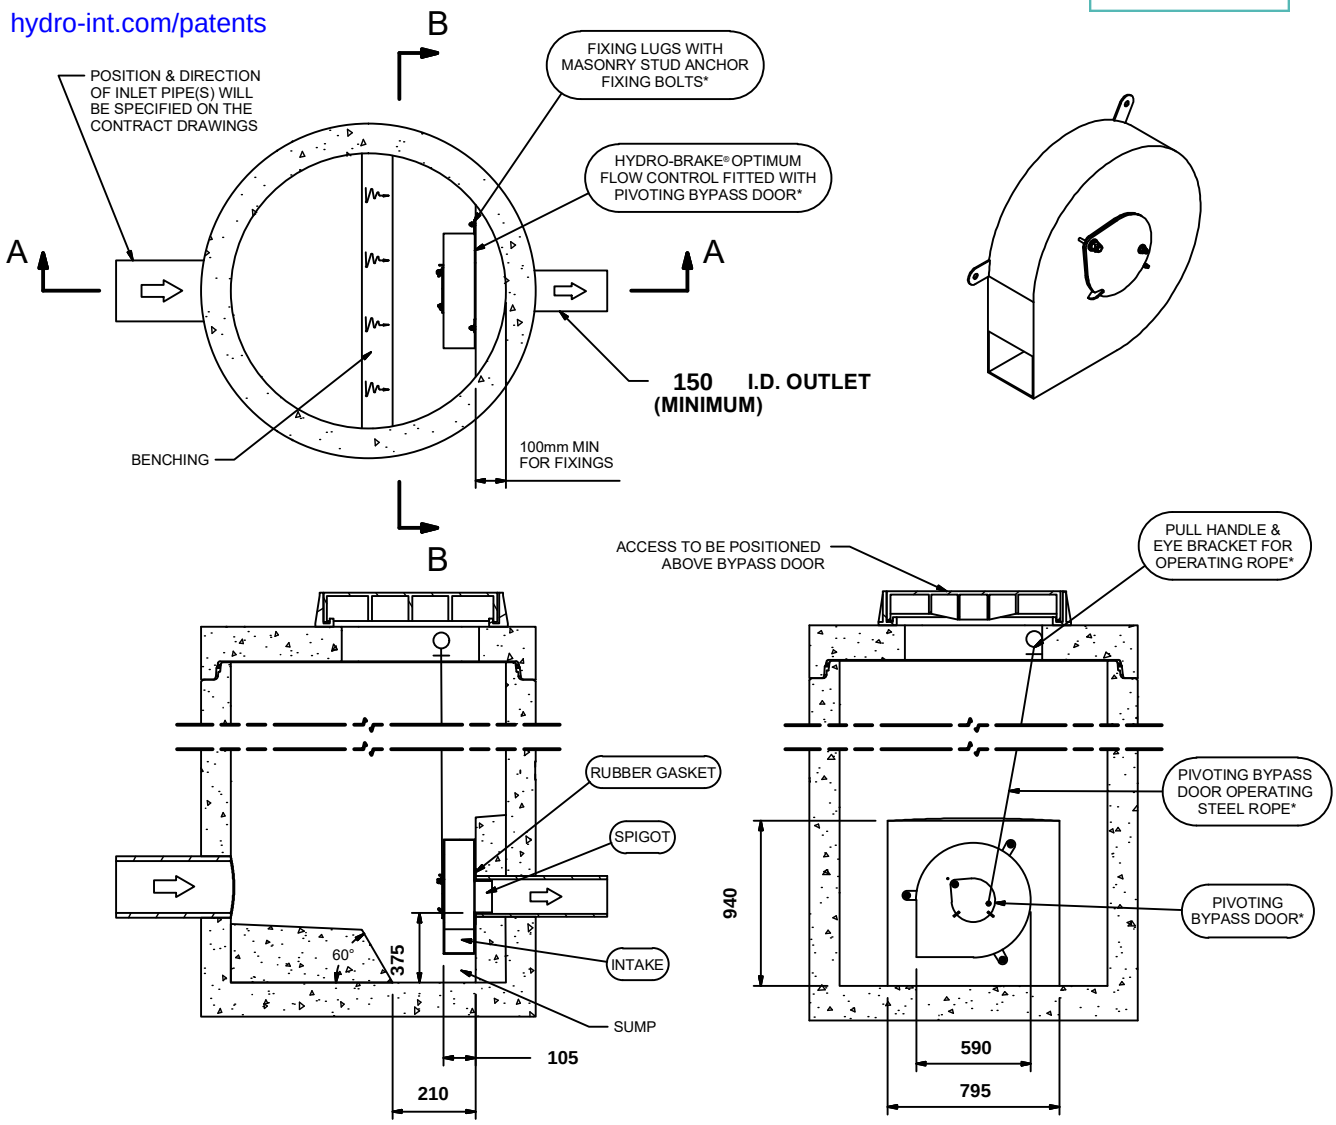

SECTION A-A

SECTION B-B

IMPORTANT: ⬭ LIMIT OF HYDRO INTERNATIONAL SUPPLY
THE DEVICE WILL BE HANDED TO SUIT SITE CONDITIONS
FOR SITE SPECIFIC DETAILS AND MINIMUM CHAMBER SIZE REFER TO HYDRO INTERNATIONAL
ALL CIVIL AND INSTALLATION WORK BY OTHERS
* WHERE SUPPLIED
HYDRO-BRAKE® FLOW CONTROL & HYDRO-BRAKE® OPTIMUM FLOW CONTROL ARE REGISTERED TRADEMARKS FOR FLOW CONTROLS DESIGNED AND MANUFACTURED EXCLUSIVELY BY HYDRO INTERNATIONAL

THIS DESIGN LAYOUT IS FOR ILLUSTRATIVE PURPOSES ONLY. NOT TO SCALE.

DESIGN ADVICE

The head/flow characteristics of this SHE-0100-5000-1400-5000 Hydro-Brake® Optimum Flow Control are unique. Dynamic hydraulic modelling evaluates the full head/flow characteristic curve.
The use of any other flow control will invalidate any design based on this data and could constitute a flood risk.

Hydro International®

DATE	12/07/2023 14:08
SITE	BENNETT STREET
DESIGNER	Robin Foster
REF	SHB5-2

SHE-0100-5000-1400-5000
Hydro-Brake® Optimum

© 2023
Hydro International Ltd • Unit 2, Rivermead Court • Kenn Business Park • Windmill Road • Kenn • Clevedon • BS21 6FT • Tel: 01275 878371 • www.hydro-int.com • Email: Enquiries@hydro-int.com

rf@refa.co.uk


Technical Specification

Control Point	Head (m)	Flow (l/s)
Primary Design	1.400	5.000
Flush-Flo	0.416	4.991
Kick-Flo®	0.855	3.980
Mean Flow		4.382

BBA APPROVAL INSPECTION TESTING CERTIFICATION
CERTIFICATE No 08/4596

wrc approved™
PT/503/0422
Valid: 01/04/2022 - 31/03/2027

hydro-int.com/patents

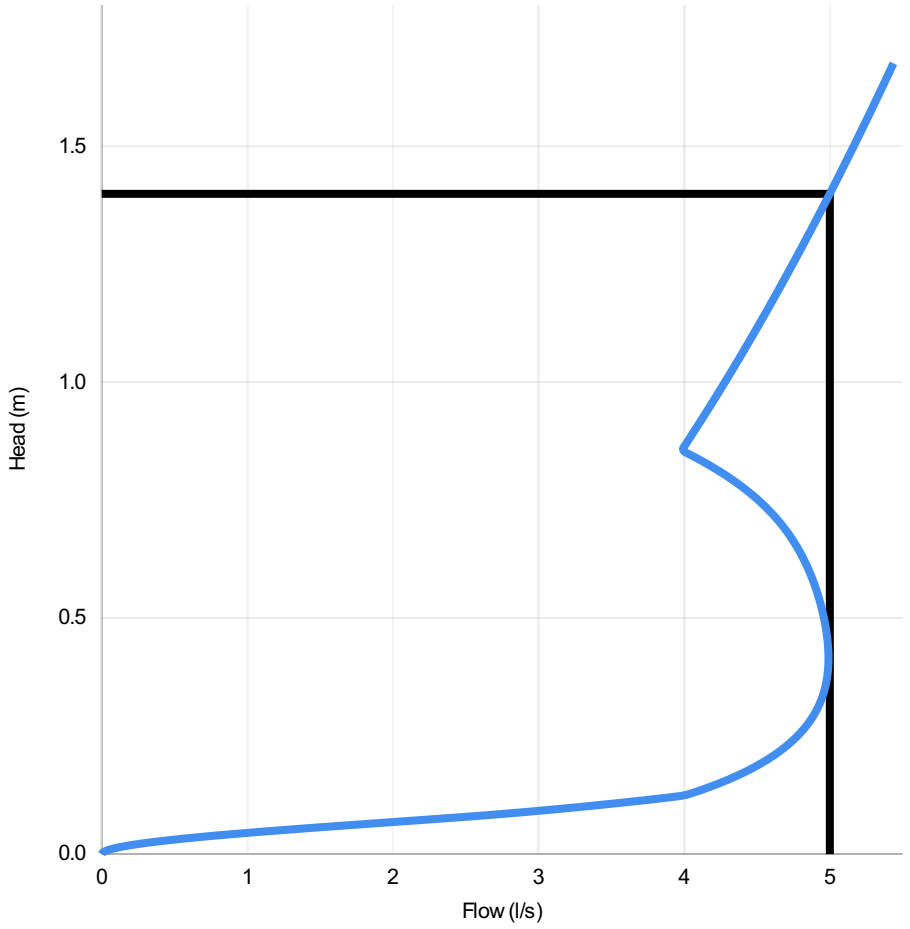

Head (m)	Flow (l/s)
0.000	0.000
0.048	1.130
0.097	3.168
0.145	4.196
0.193	4.532
0.241	4.747
0.290	4.880
0.338	4.954
0.386	4.986
0.434	4.989
0.483	4.971
0.531	4.936
0.579	4.885
0.628	4.817
0.676	4.723
0.724	4.597
0.772	4.424
0.821	4.194
0.869	4.010
0.917	4.111
0.966	4.209
1.014	4.305
1.062	4.399
1.110	4.490
1.159	4.579
1.207	4.667
1.255	4.752
1.303	4.836
1.352	4.918
1.400	4.999

DESIGN ADVICE

The head/flow characteristics of this SHE-0100-5000-1400-5000 Hydro-Brake Optimum® Flow Control are unique. Dynamic hydraulic modelling evaluates the full head/flow characteristic curve.

! **The use of any other flow control will invalidate any design based on this data and could constitute a flood risk.**

Hydro International®

DATE	12/07/2023 14:08
Site	BENNETT STREET
DESIGNER	Robin Foster
Ref	SHB5-2

SHE-0100-5000-1400-5000

Hydro-Brake Optimum®

© 2018 Hydro International, Rivermead Court, Kenn Business Park, Windmill Road, Kenn, Clevedon, BS21 6FT. Tel 01275 878371 Fax 01275 874979 Web www.hydro-int.com Email designtools@hydro-int.com